

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 P Base NEMA Premium Efficiency Three-Phase      Product code : 13016492

Frame	: 184HP	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: W-6
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 46.2 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0169 kgm <sup>2</sup>
Design	: B		

Output [HP]	5	4	4	4	5	5	5	
Poles	4	4	4	4	4	4	4	
Frequency [Hz]	60	50	50	50	50	50	50	
Rated voltage [V]	230/460	380	400	415	380	400	415	
Rated current [A]	13.0/6.49	6.42	6.21	6.23	7.74	7.44	7.35	
L. R. Amperes [A]	97.4/48.7	44.9	47.8	51.1	44.9	47.6	50.7	
LRC [A]	7.5x(Code J)	7.0x(Code J)	7.7x(Code K)	8.2x(Code L)	5.8x(Code G)	6.4x(Code H)	6.9x(Code J)	
No load current [A]	5.80/2.90	2.80	3.10	3.30	2.80	3.10	3.30	
Rated speed [RPM]	1750	1455	1455	1460	1430	1440	1445	
Slip [%]	2.78	3.00	3.00	2.67	4.67	4.00	3.67	
Rated torque [kgfm]	2.07	2.00	2.00	1.99	2.54	2.52	2.51	
Locked rotor torque [%]	229	229	260	290	185	210	229	
Breakdown torque [%]	290	300	320	350	225	250	270	
Service factor	1.25	1.15	1.15	1.15	1.15	1.15	1.15	
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K	
Locked rotor time	27s (cold) 15s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	
Noise level <sup>2</sup>	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	
Efficiency (%)	25%	88.2	87.7	86.4	86.2	89.1	88.0	88.0
	50%	88.5	87.5	86.7	86.5	88.5	87.5	87.5
	75%	89.5	88.2	88.2	88.2	87.5	88.5	88.5
	100%	89.5	87.7	88.2	88.2	86.5	87.5	87.5
Power Factor	25%	0.38	0.38	0.34	0.31	0.45	0.41	0.38
	50%	0.62	0.61	0.57	0.53	0.69	0.65	0.61
	75%	0.74	0.75	0.71	0.67	0.80	0.77	0.74
	100%	0.80	0.81	0.79	0.76	0.84	0.82	0.80

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	11.2	13.4	12.8	12.8	14.9	13.6	13.6
	P2 (0,5;1,0)	9.4	11.2	10.7	10.7	12.5	11.4	11.4
	P3 (0,25;1,0)	8.7	10.3	9.9	9.9	11.5	10.5	10.5
	P4 (0,9;0,5)	5.3	6.4	6.1	6.1	7.1	6.5	6.5
	P5 (0,5;0,5)	3.7	4.4	4.2	4.2	4.9	4.4	4.4
	P6 (0,5;0,25)	2.4	2.9	2.7	2.7	3.2	2.9	2.9
	P7 (0,25;0,25)	1.7	2.1	2.0	2.0	2.3	2.1	2.1

Bearing type	: Drive end 6308 ZZ      Non drive end 6206 ZZ	Foundation loads Max. traction Max. compression
Sealing	: V'Ring      V'Ring	
Lubrication interval	: -      -	
Lubricant amount	: -      -	
Lubricant type	: Mobil Polyrex EM	

This revision replaces and cancel the previous one, which must be eliminated.

(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/01/2024		1 / 9	

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Notes  
USABLE @208V 14.3A SF 1.15 SFA 16.4A

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/01/2024		2 / 9	

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium Efficiency Three-Phase

Product code : 13016492

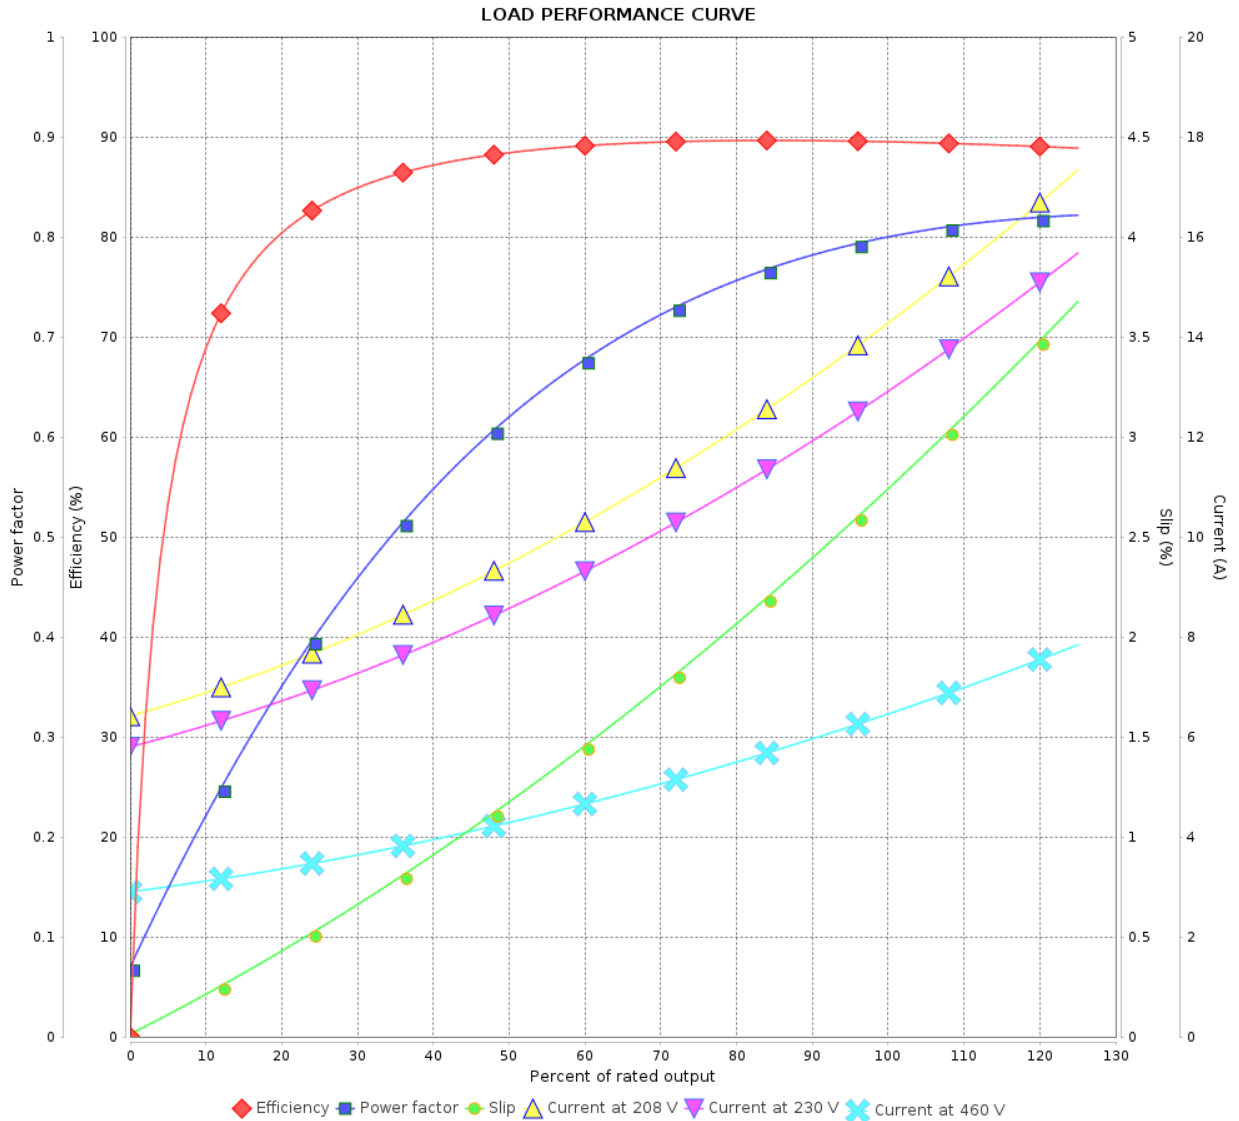

Performance : 230/460 V 60 Hz 4P

Rated current : 13.0/6.49 A  
 LRC : 7.5  
 Rated torque : 2.07 kgfm  
 Locked rotor torque : 229 %  
 Breakdown torque : 290 %  
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.0169 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 P Base NEMA Premium Efficiency  
Three-Phase

Product code : 13016492

LOAD PERFORMANCE CURVE

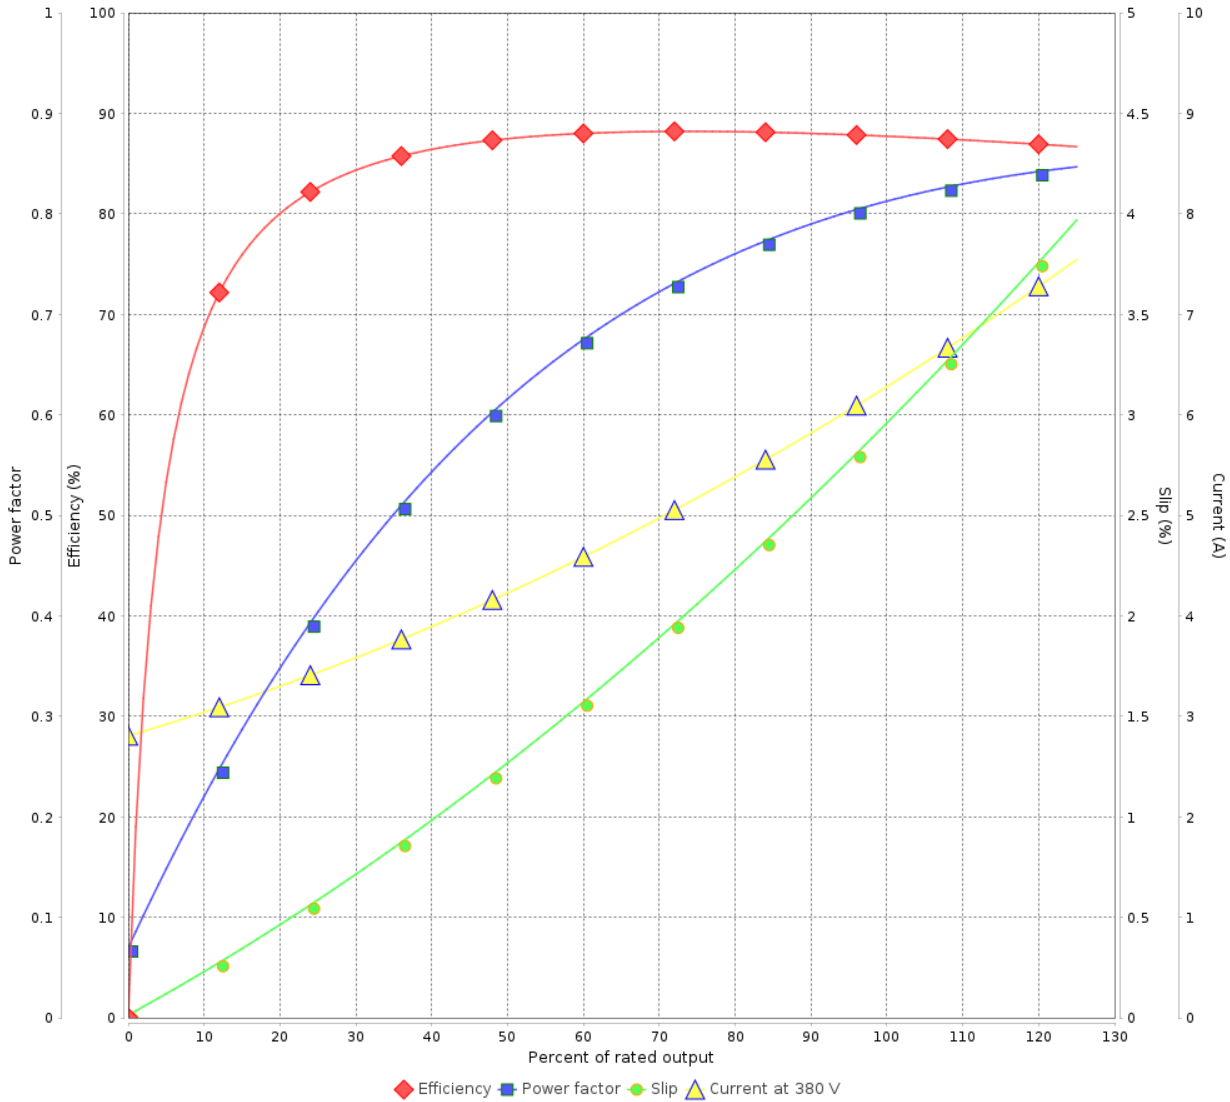

Performance : 380 V 50 Hz 4P IE3

Rated current : 6.42 A  
 LRC : 7.0  
 Rated torque : 2.00 kgfm  
 Locked rotor torque : 229 %  
 Breakdown torque : 300 %  
 Rated speed : 1455 rpm

Moment of inertia (J) : 0.0169 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 9	Revision
Checked by				
Date	14/01/2024			

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium Efficiency Three-Phase

Product code : 13016492

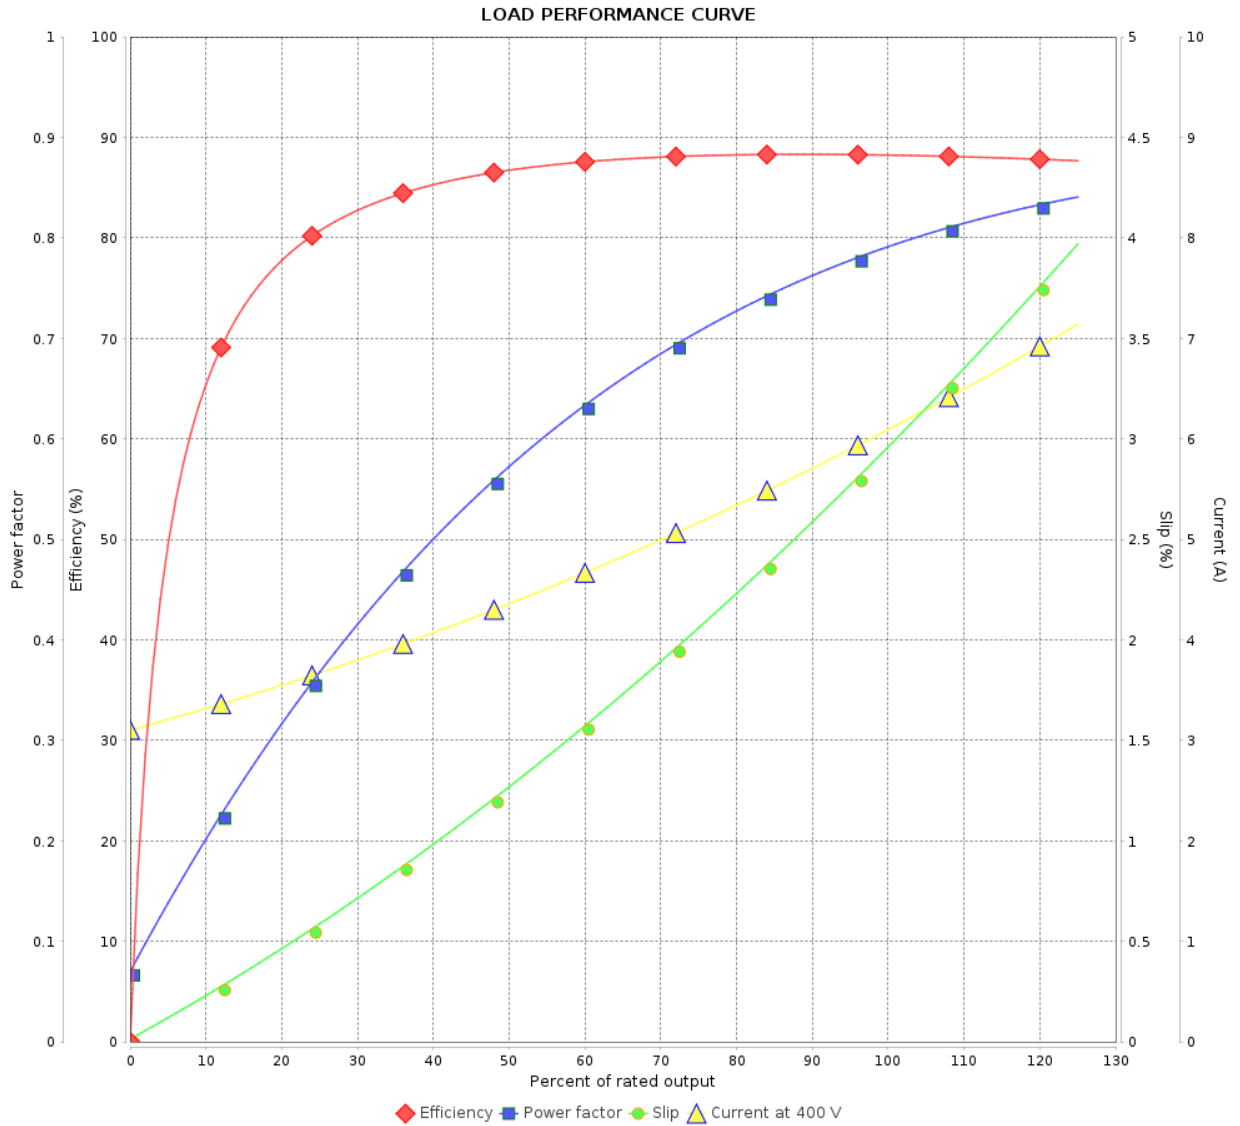

Performance : 400 V 50 Hz 4P IE3

Rated current : 6.21 A  
 LRC : 7.7  
 Rated torque : 2.00 kgfm  
 Locked rotor torque : 260 %  
 Breakdown torque : 320 %  
 Rated speed : 1455 rpm

Moment of inertia (J) : 0.0169 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 P Base NEMA Premium Efficiency  
Three-Phase

Product code : 13016492

LOAD PERFORMANCE CURVE

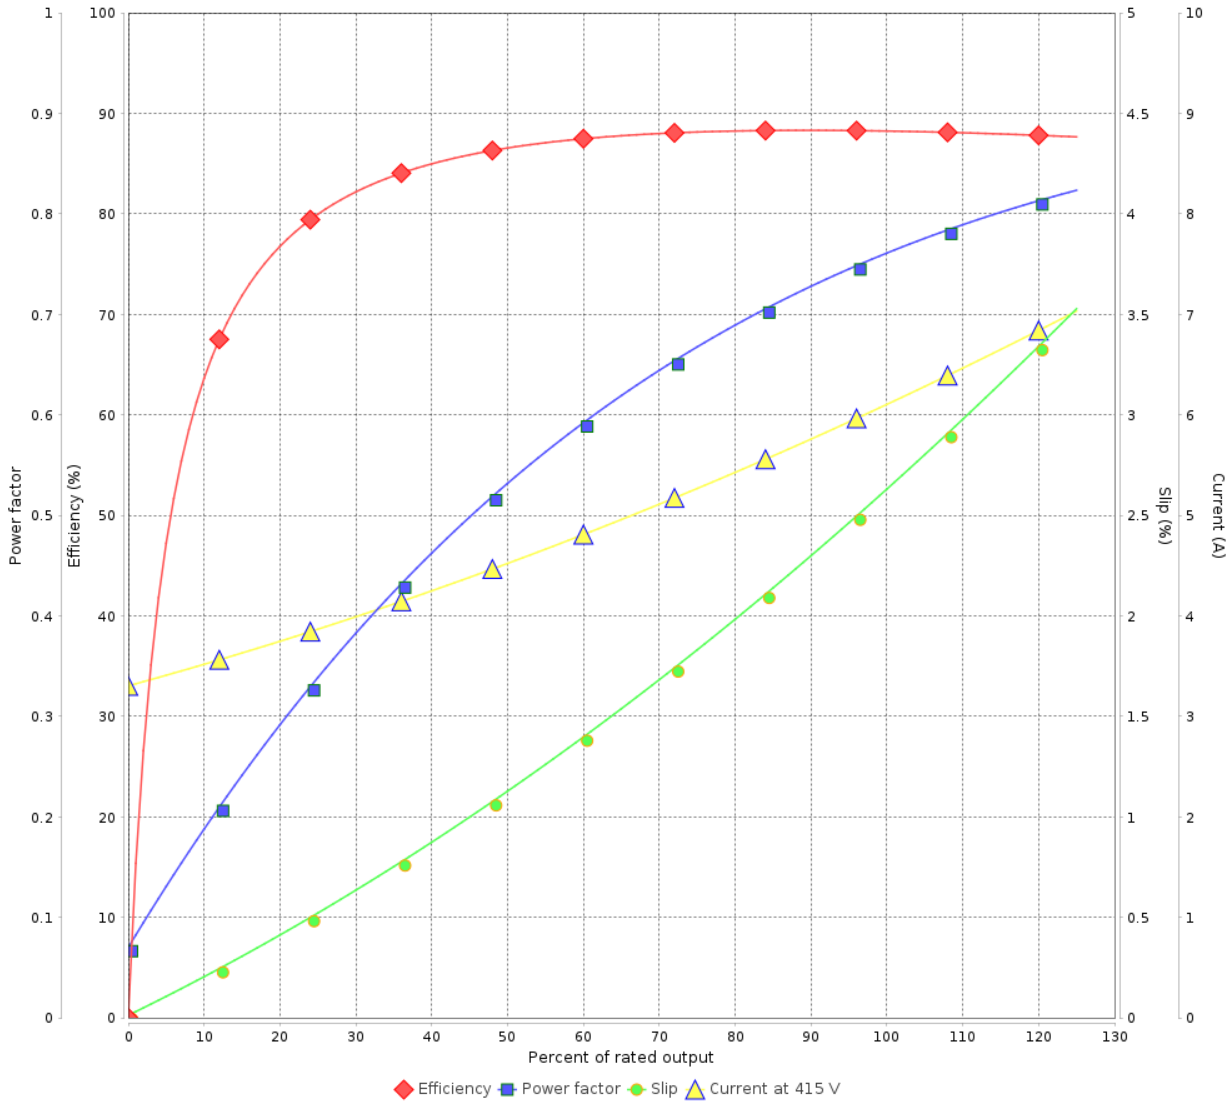

Performance : 415 V 50 Hz 4P IE3

Rated current : 6.23 A  
 LRC : 8.2  
 Rated torque : 1.99 kgfm  
 Locked rotor torque : 290 %  
 Breakdown torque : 350 %  
 Rated speed : 1460 rpm

Moment of inertia (J) : 0.0169 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium Efficiency Three-Phase

Product code : 13016492

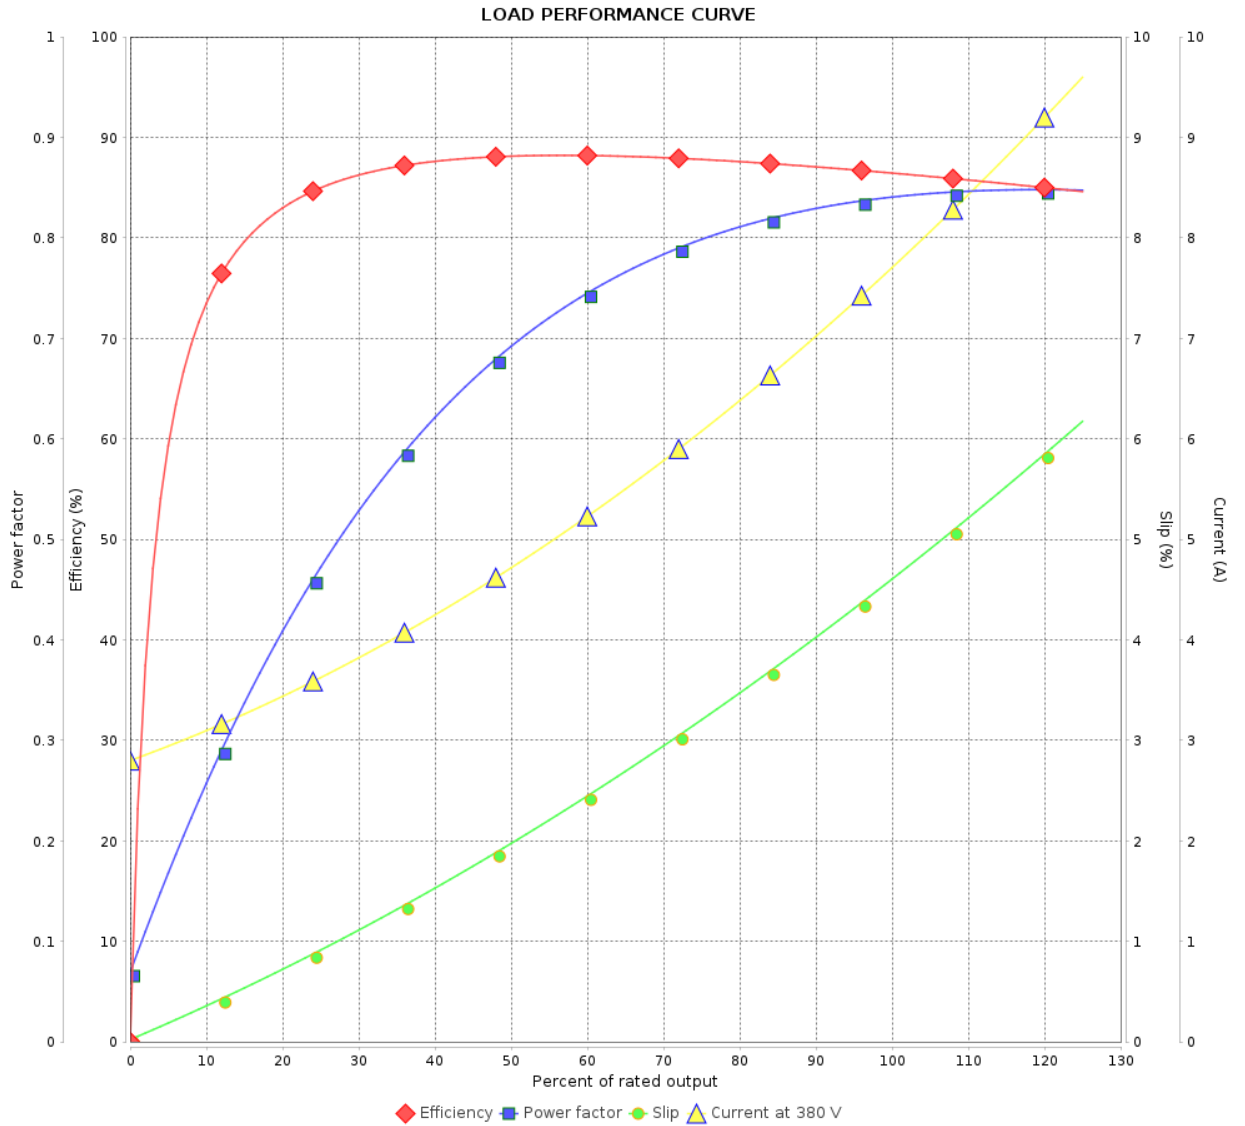

Performance : 380 V 50 Hz 4P IE2

Rated current : 7.74 A  
 LRC : 5.8  
 Rated torque : 2.54 kgfm  
 Locked rotor torque : 185 %  
 Breakdown torque : 225 %  
 Rated speed : 1430 rpm

Moment of inertia (J) : 0.0169 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium Efficiency Three-Phase

Product code : 13016492

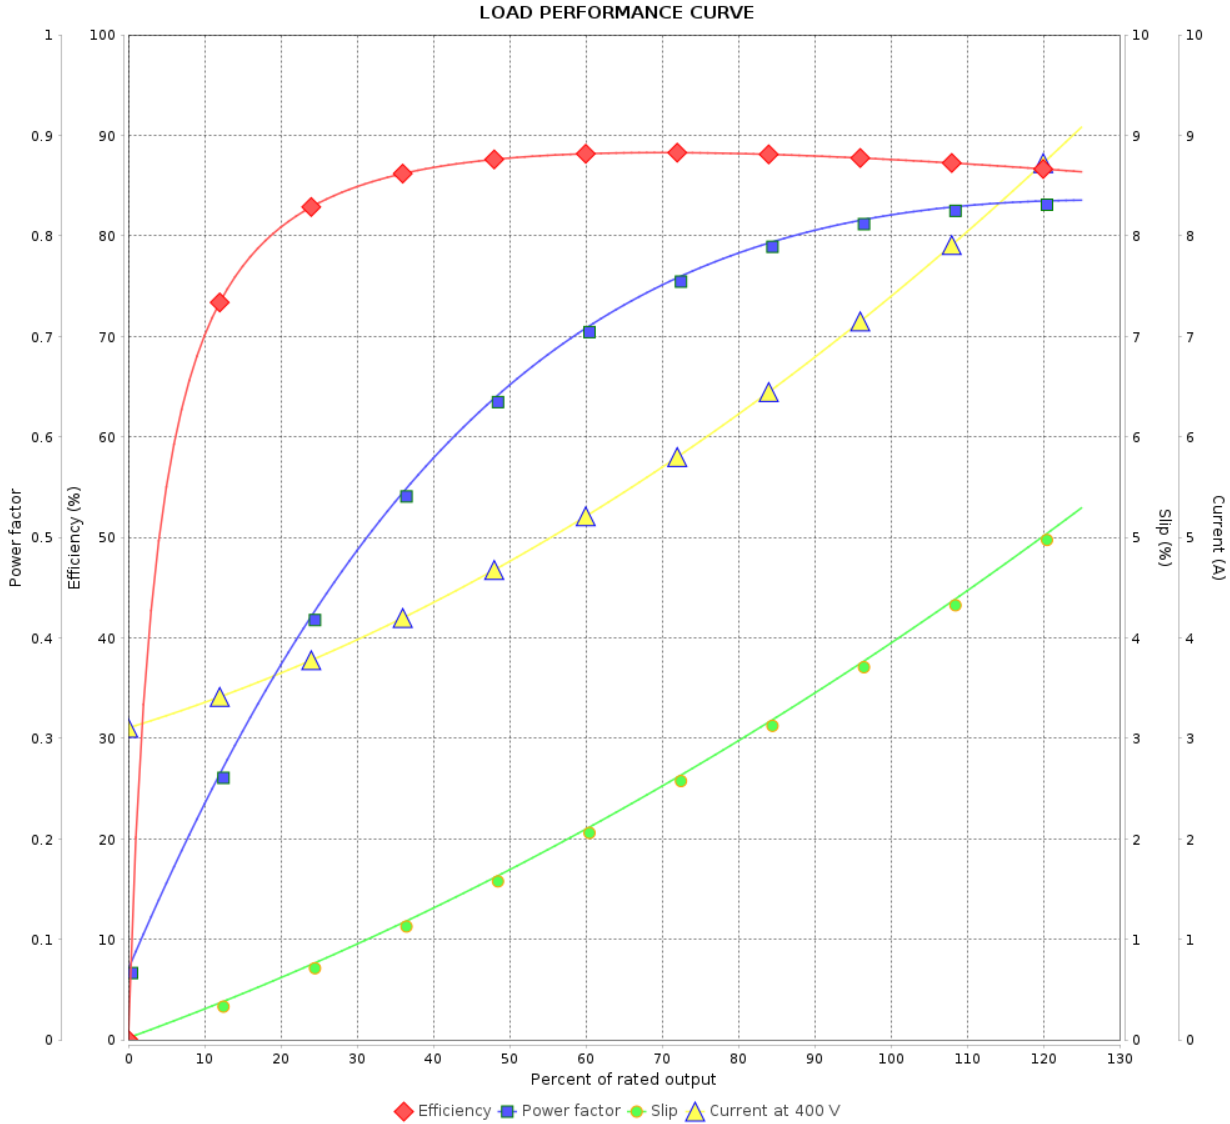

Performance : 400 V 50 Hz 4P IE2

Rated current	: 7.44 A	Moment of inertia (J)	: 0.0169 kgm <sup>2</sup>
LRC	: 6.4	Duty cycle	: Cont.(S1)
Rated torque	: 2.52 kgfm	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.15
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 1440 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				



# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 P Base NEMA Premium Efficiency  
Three-Phase

Product code : 13016492

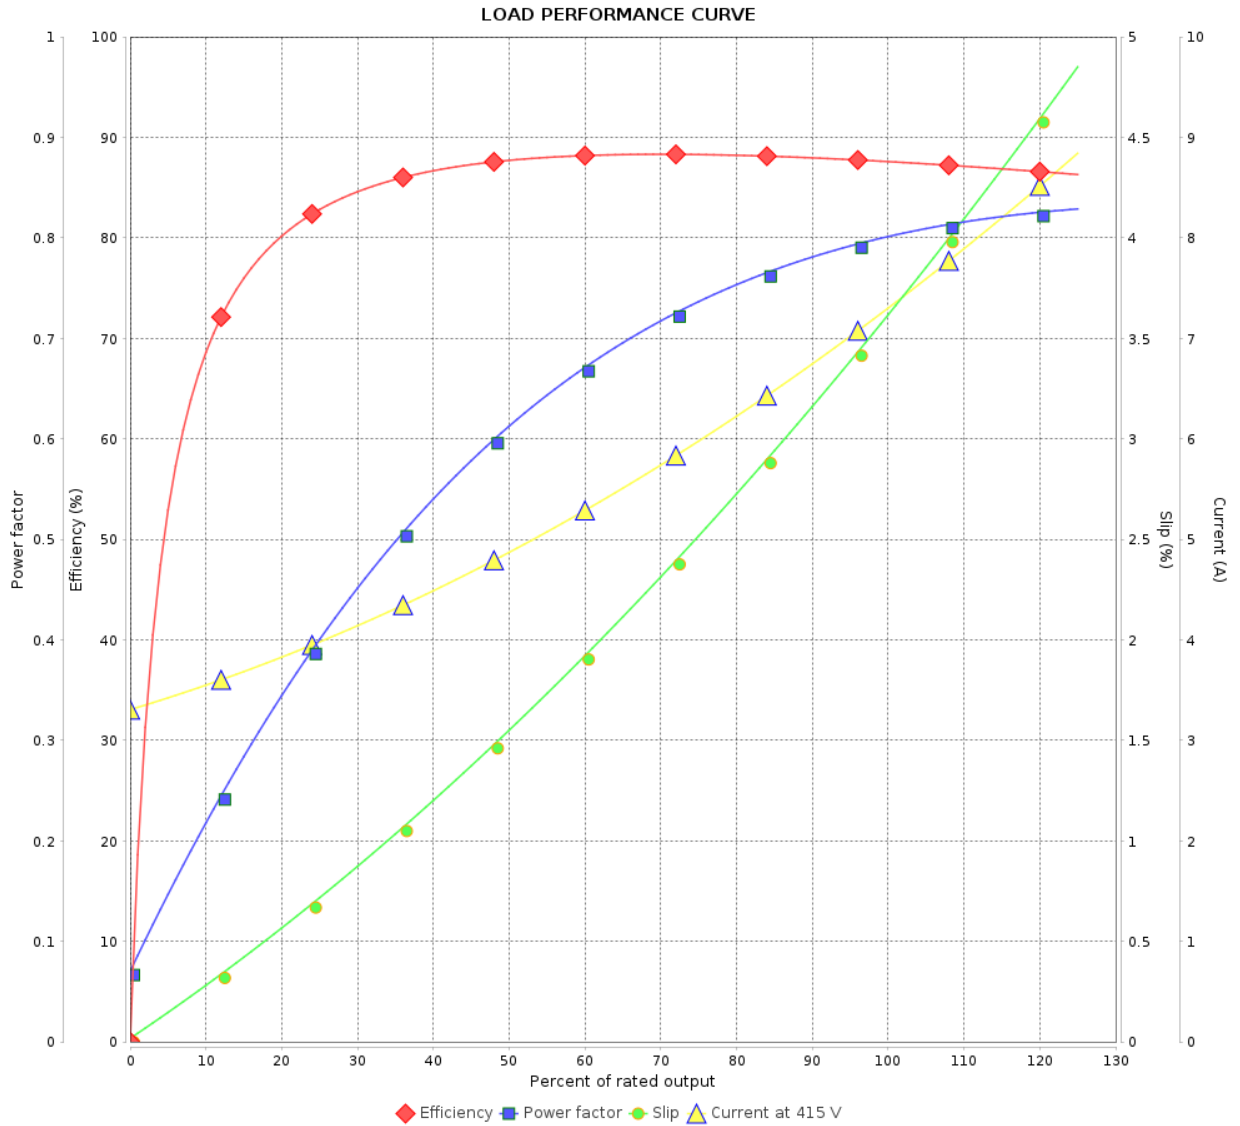

Performance : 415 V 50 Hz 4P IE2

Rated current : 7.35 A  
 LRC : 6.9  
 Rated torque : 2.51 kgfm  
 Locked rotor torque : 229 %  
 Breakdown torque : 270 %  
 Rated speed : 1445 rpm

Moment of inertia (J) : 0.0169 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		9 / 9		
Date		14/01/2024		