

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :					
Product line	: W22 P Base NEMA Premium Efficiency Three-Phase	Product code :	13128965		
Frame	: 182HP	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: W-6		
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 42.9 kg		
Protection degree	: IP55	Moment of inertia (J)	: 0.0143 kgm ²		
Design	: B				
Output [HP]	3	3	3	3	
Poles	4	4	4	4	
Frequency [Hz]	60	50	50	50	
Rated voltage [V]	230/460	380	400	415	
Rated current [A]	7.82/3.91	4.78	4.54	4.43	
L. R. Amperes [A]	63.3/31.7	30.1	32.2	33.7	
LRC [A]	8.1x(Code K)	6.3x(Code H)	7.1x(Code J)	7.6x(Code K)	
No load current [A]	4.00/2.00	2.00	2.10	2.25	
Rated speed [RPM]	1760	1445	1450	1455	
Slip [%]	2.22	3.67	3.33	3.00	
Rated torque [kgfm]	1.24	1.51	1.50	1.50	
Locked rotor torque [%]	220	220	220	240	
Breakdown torque [%]	330	250	290	320	
Service factor	1.25	1.25	1.25	1.25	
Temperature rise	80 K	80 K	80 K	80 K	
Locked rotor time	41s (cold) 23s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	
Noise level ²	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	
Efficiency (%)	25%	86.4	87.2	87.3	87.3
	50%	87.5	87.5	87.5	87.5
	75%	88.5	87.5	87.5	87.5
	100%	89.5	87.5	87.5	87.5
Power Factor	25%	0.36	0.43	0.39	0.36
	50%	0.61	0.68	0.64	0.61
	75%	0.71	0.77	0.75	0.73
	100%	0.79	0.80	0.80	0.79
Losses at normative operating points (speed;torque), in percentage of rated output power					
Losses (%)	P1 (0,9;1,0)	11.0	13.4	13.4	13.4
	P2 (0,5;1,0)	8.9	10.8	10.8	10.8
	P3 (0,25;1,0)	8.8	10.7	10.7	10.7
	P4 (0,9;0,5)	6.1	7.4	7.4	7.4
	P5 (0,5;0,5)	4.0	4.9	4.9	4.9
	P6 (0,5;0,25)	3.0	3.6	3.6	3.6
	P7 (0,25;0,25)	2.1	2.6	2.6	2.6
Bearing type	: Drive end 6308 ZZ	Non drive end 6206 ZZ	Foundation loads		
Sealing	: V'Ring	V'Ring	Max. traction		
Lubrication interval	: -	-	Max. compression		
Lubricant amount	: -	-			
Lubricant type	: Mobil Polyrex EM				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	14/01/2024			1 / 6	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes
USABLE @208V 8.65A SF 1.15 SFA 9.95A

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/01/2024		2 / 6	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium Efficiency Three-Phase

Product code : 13128965

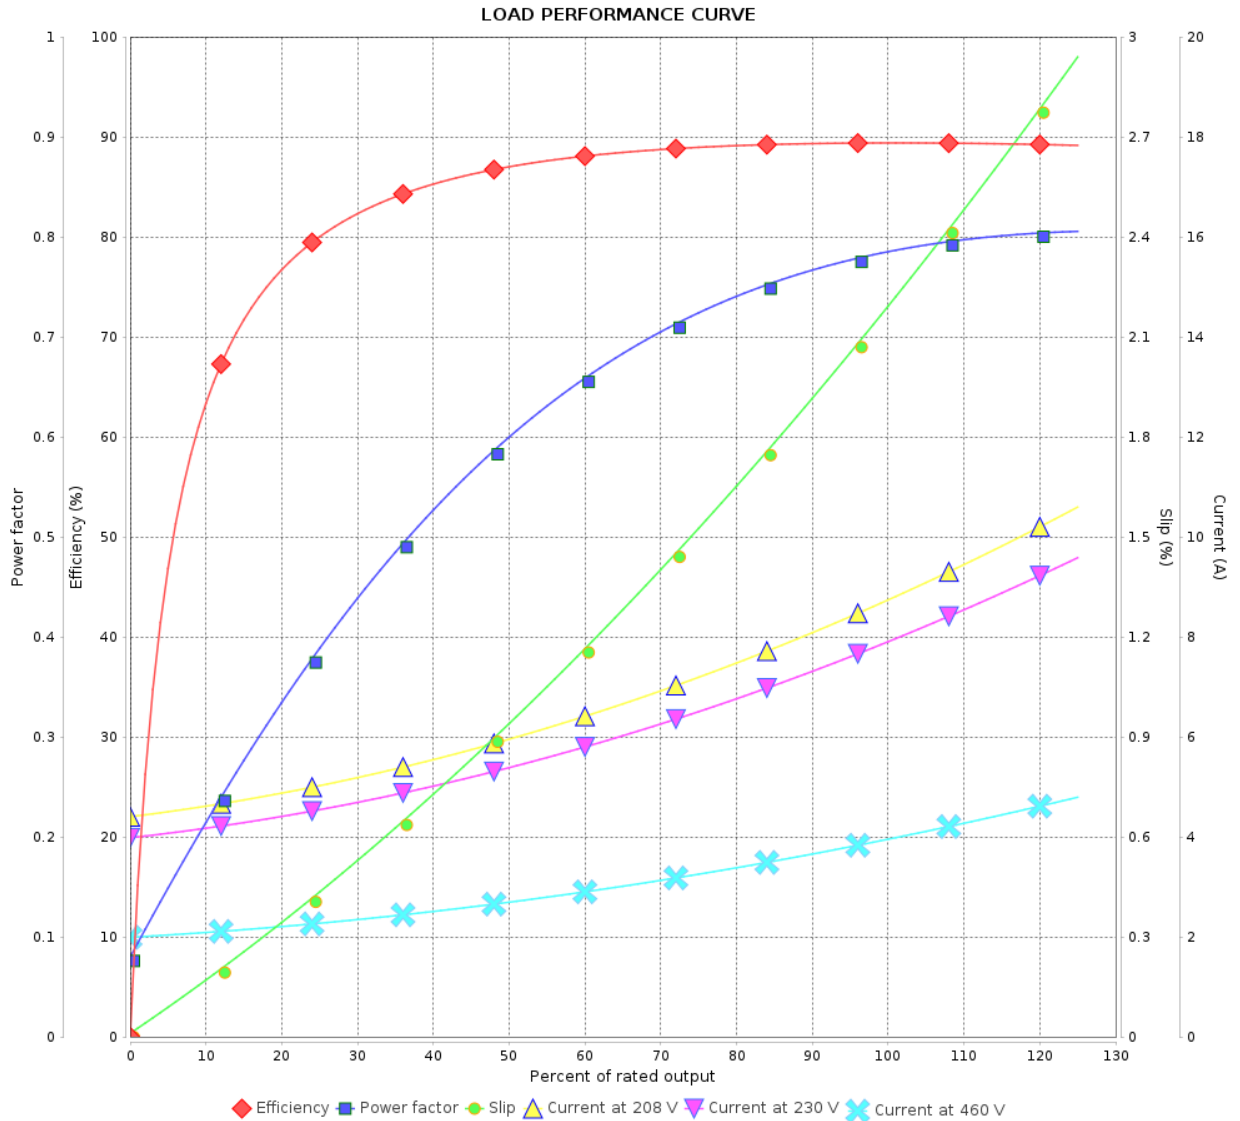

Performance : 230/460 V 60 Hz 4P

Rated current : 7.82/3.91 A
 LRC : 8.1
 Rated torque : 1.24 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 330 %
 Rated speed : 1760 rpm

Moment of inertia (J) : 0.0143 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : W22 P Base NEMA Premium Efficiency
Three-Phase

Product code : 13128965

LOAD PERFORMANCE CURVE

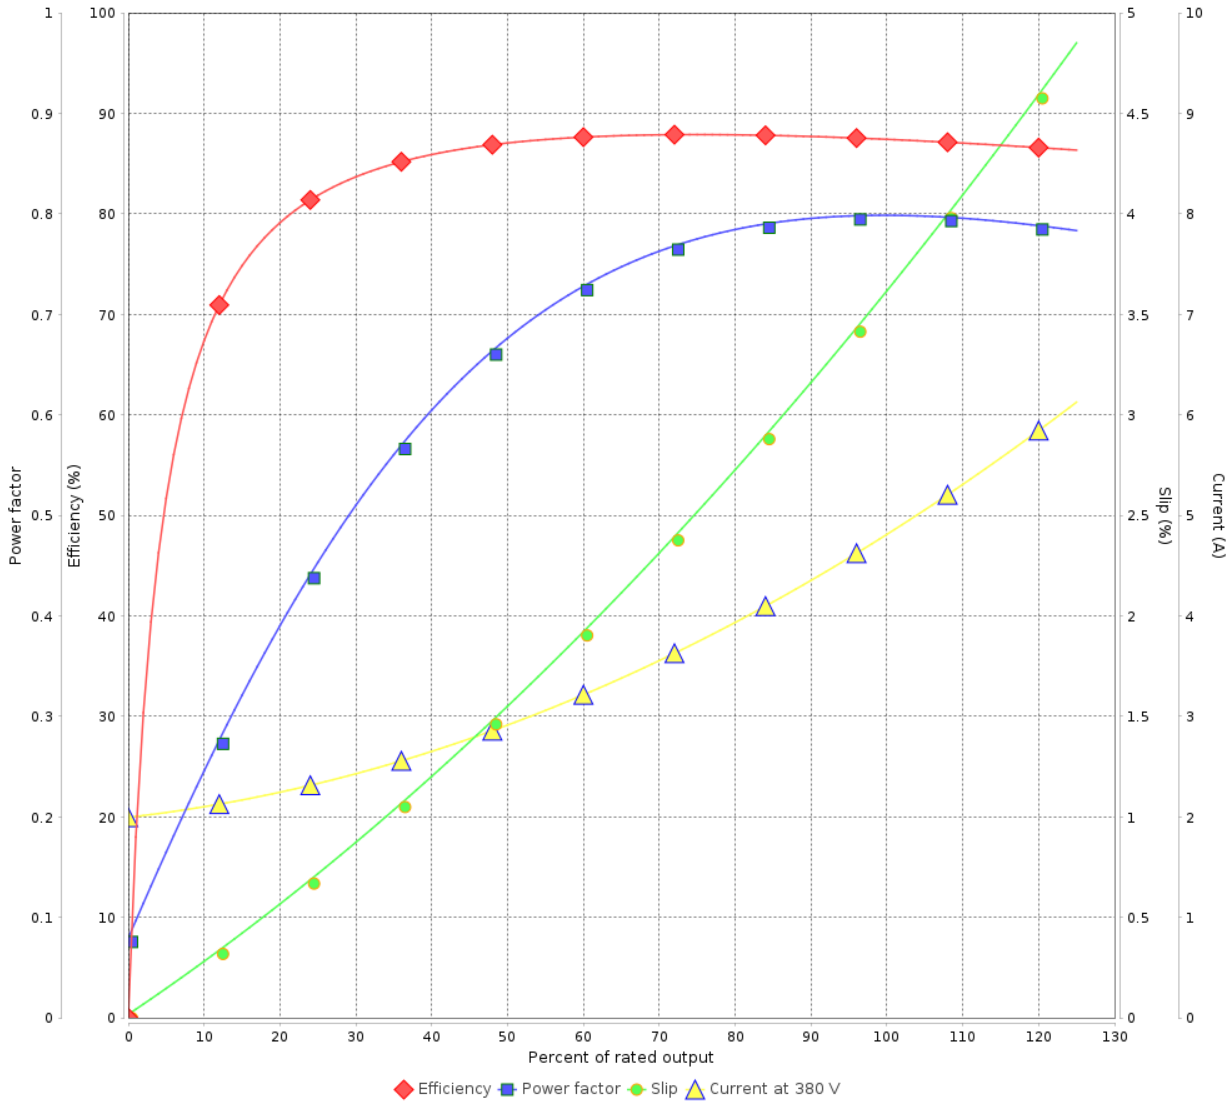

Performance : 380 V 50 Hz 4P IE3

Rated current : 4.78 A
 LRC : 6.3
 Rated torque : 1.51 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 250 %
 Rated speed : 1445 rpm

Moment of inertia (J) : 0.0143 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 P Base NEMA Premium Efficiency
Three-Phase

Product code : 13128965

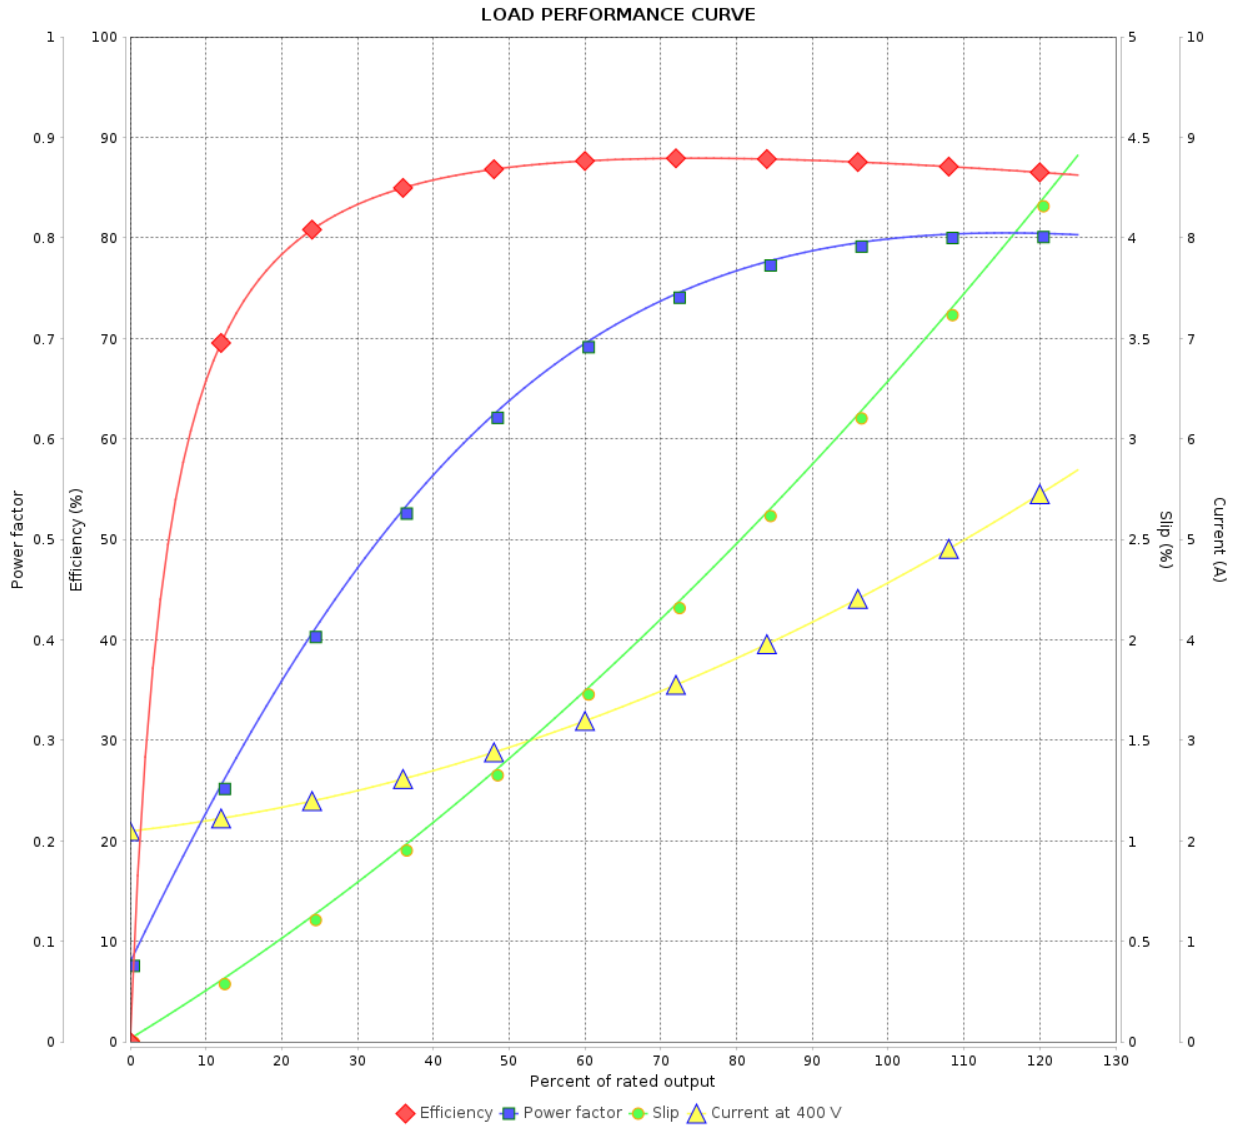

Performance : 400 V 50 Hz 4P IE3

Rated current : 4.54 A
 LRC : 7.1
 Rated torque : 1.50 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 290 %
 Rated speed : 1450 rpm

Moment of inertia (J) : 0.0143 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				
			5 / 6	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : W22 P Base NEMA Premium Efficiency
Three-Phase

Product code : 13128965

LOAD PERFORMANCE CURVE

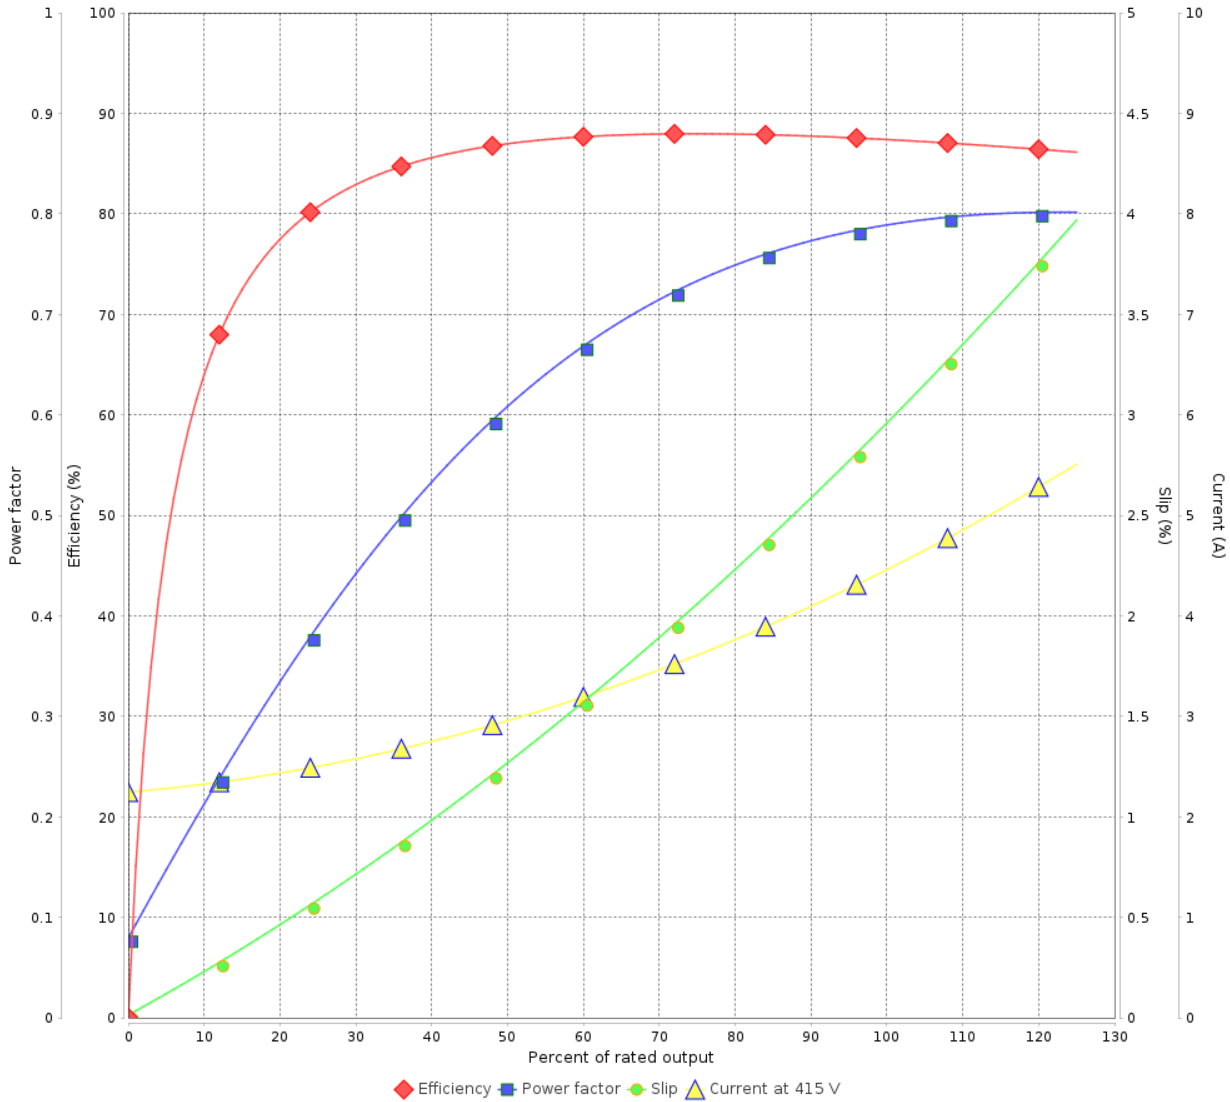

Performance : 415 V 50 Hz 4P IE3

Rated current : 4.43 A
 LRC : 7.6
 Rated torque : 1.50 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 320 %
 Rated speed : 1455 rpm

Moment of inertia (J) : 0.0143 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				