

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :					
Product line	: W22 IEEE 841 NEMA Premium Efficiency Three-Phase	Product code :	13166478		
Frame	: 143/5T	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 24.1 kg		
Protection degree	: IP55	Moment of inertia (J)	: 0.0060 kgm ²		
Design	: B				
Output [HP]	1.5	1.5	1.5	1.5	
Poles	4	4	4	4	
Frequency [Hz]	60	50	50	50	
Rated voltage [V]	460	380	400	415	
Rated current [A]	2.02	2.42	2.33	2.30	
L. R. Amperes [A]	17.0	15.5	16.3	17.0	
LRC [A]	8.4x(Code L)	6.4x(Code J)	7.0x(Code K)	7.4x(Code K)	
No load current [A]	1.10	1.10	1.20	1.30	
Rated speed [RPM]	1755	1440	1445	1450	
Slip [%]	2.50	4.00	3.67	3.33	
Rated torque [kgfm]	0.620	0.756	0.751	0.751	
Locked rotor torque [%]	290	220	250	280	
Breakdown torque [%]	350	250	290	320	
Service factor	1.25	1.25	1.25	1.25	
Temperature rise	80 K	80 K	80 K	80 K	
Locked rotor time	25s (cold) 14s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	
Noise level ²	51.0 dB(A)	49.0 dB(A)	49.0 dB(A)	49.0 dB(A)	
Efficiency (%)	25%				
	50%	82.5	82.5	82.5	81.0
	75%	85.5	84.0	84.0	84.0
	100%	86.5	84.1	84.1	84.1
Power Factor	25%				
	50%	0.60	0.67	0.63	0.60
	75%	0.70	0.76	0.74	0.70
	100%	0.79	0.82	0.81	0.79
Losses at normative operating points (speed;torque), in percentage of rated output power					
Losses (%)	P1 (0,9;1,0)	14.6	14.6	14.6	14.6
	P2 (0,5;1,0)	12.1	12.1	12.1	12.1
	P3 (0,25;1,0)	12.2	12.2	12.2	12.2
	P4 (0,9;0,5)	8.2	8.2	8.2	8.2
	P5 (0,5;0,5)	5.7	5.7	5.7	5.7
	P6 (0,5;0,25)	4.3	4.3	4.3	4.3
	P7 (0,25;0,25)	3.2	3.2	3.2	3.2
Bearing type	: Drive end : 6205 C3	Non drive end : 6204 C3	Foundation loads		
Sealing	: Taconite	Taconite	Max. traction	: 56 kgf	
	Labyrinth	Labyrinth	Max. compression	: 80 kgf	
Lubrication interval	: 20000 h	20000 h			
Lubricant amount	: 4 g	4 g			
Lubricant type	: Mobil Polyrex EM				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A).			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	22/10/2024			1 / 6	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	22/10/2024		2 / 6	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium
Efficiency Three-Phase

Product code : 13166478

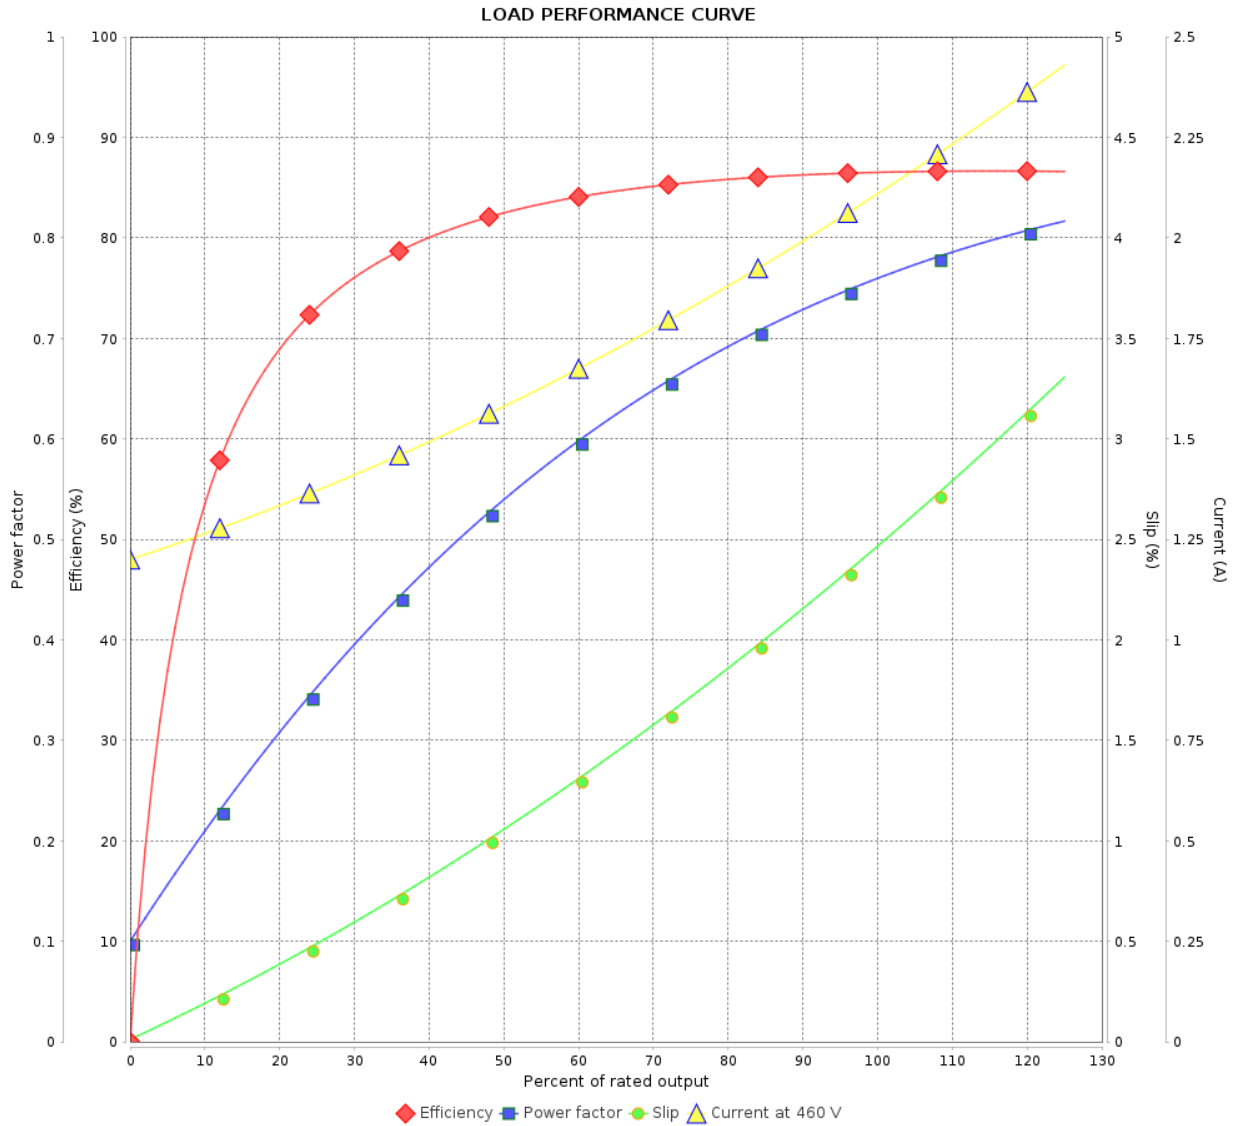

Performance : 460 V 60 Hz 4P

Rated current : 2.02 A
 LRC : 8.4
 Rated torque : 0.620 kgfm
 Locked rotor torque : 290 %
 Breakdown torque : 350 %
 Rated speed : 1755 rpm

Moment of inertia (J) : 0.0060 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 13166478

LOAD PERFORMANCE CURVE

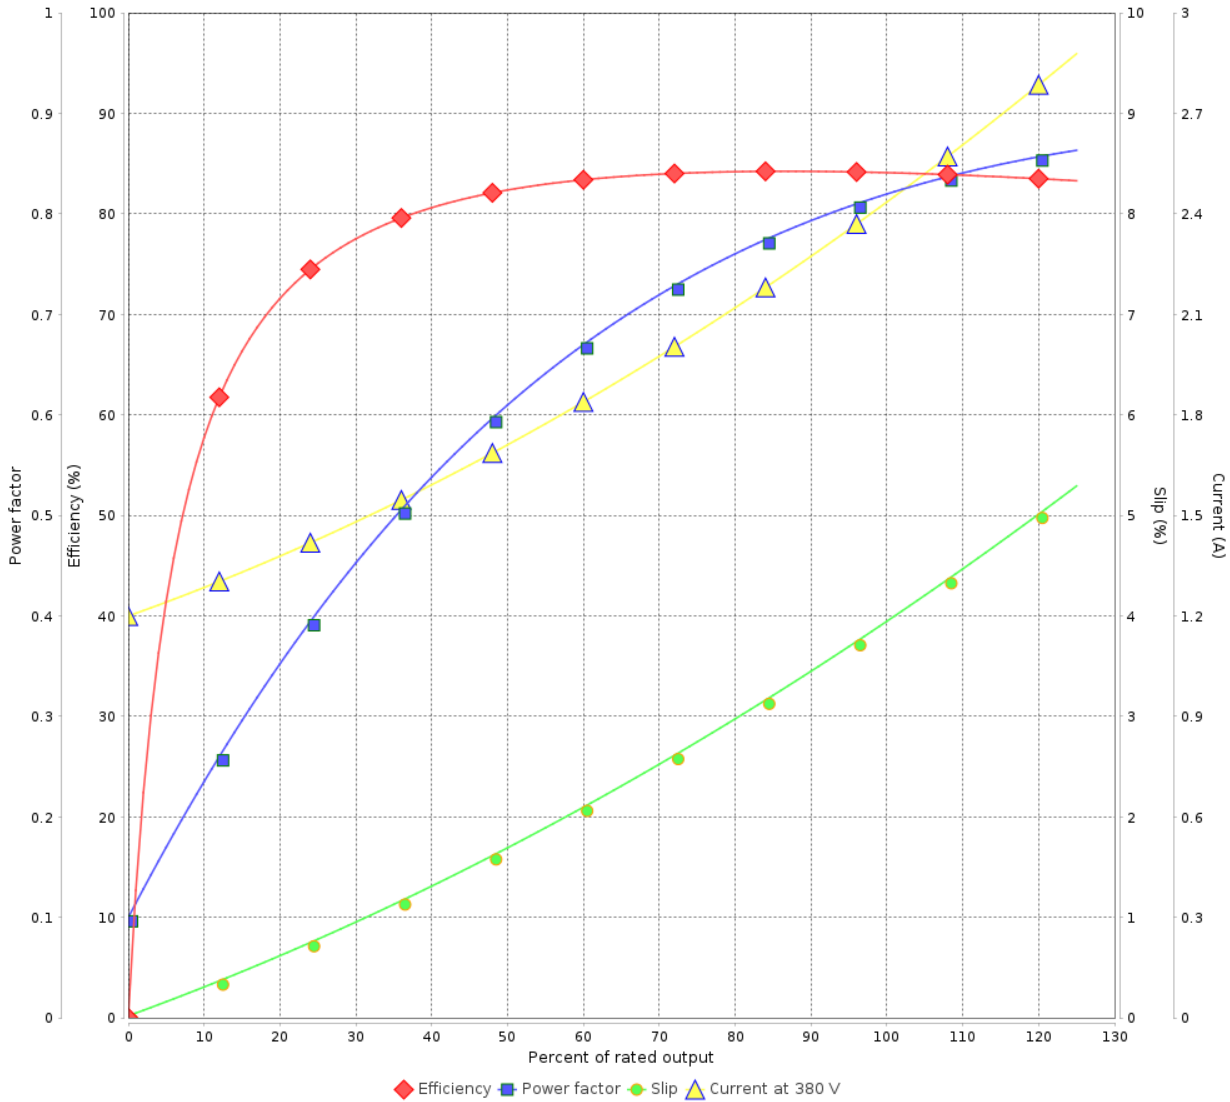

Performance : 380 V 50 Hz 4P IE3

Rated current	: 2.42 A	Moment of inertia (J)	: 0.0060 kgm ²
LRC	: 6.4	Duty cycle	: Cont.(S1)
Rated torque	: 0.756 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.25
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 1440 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 6	Revision
Checked by				
Date	22/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 13166478

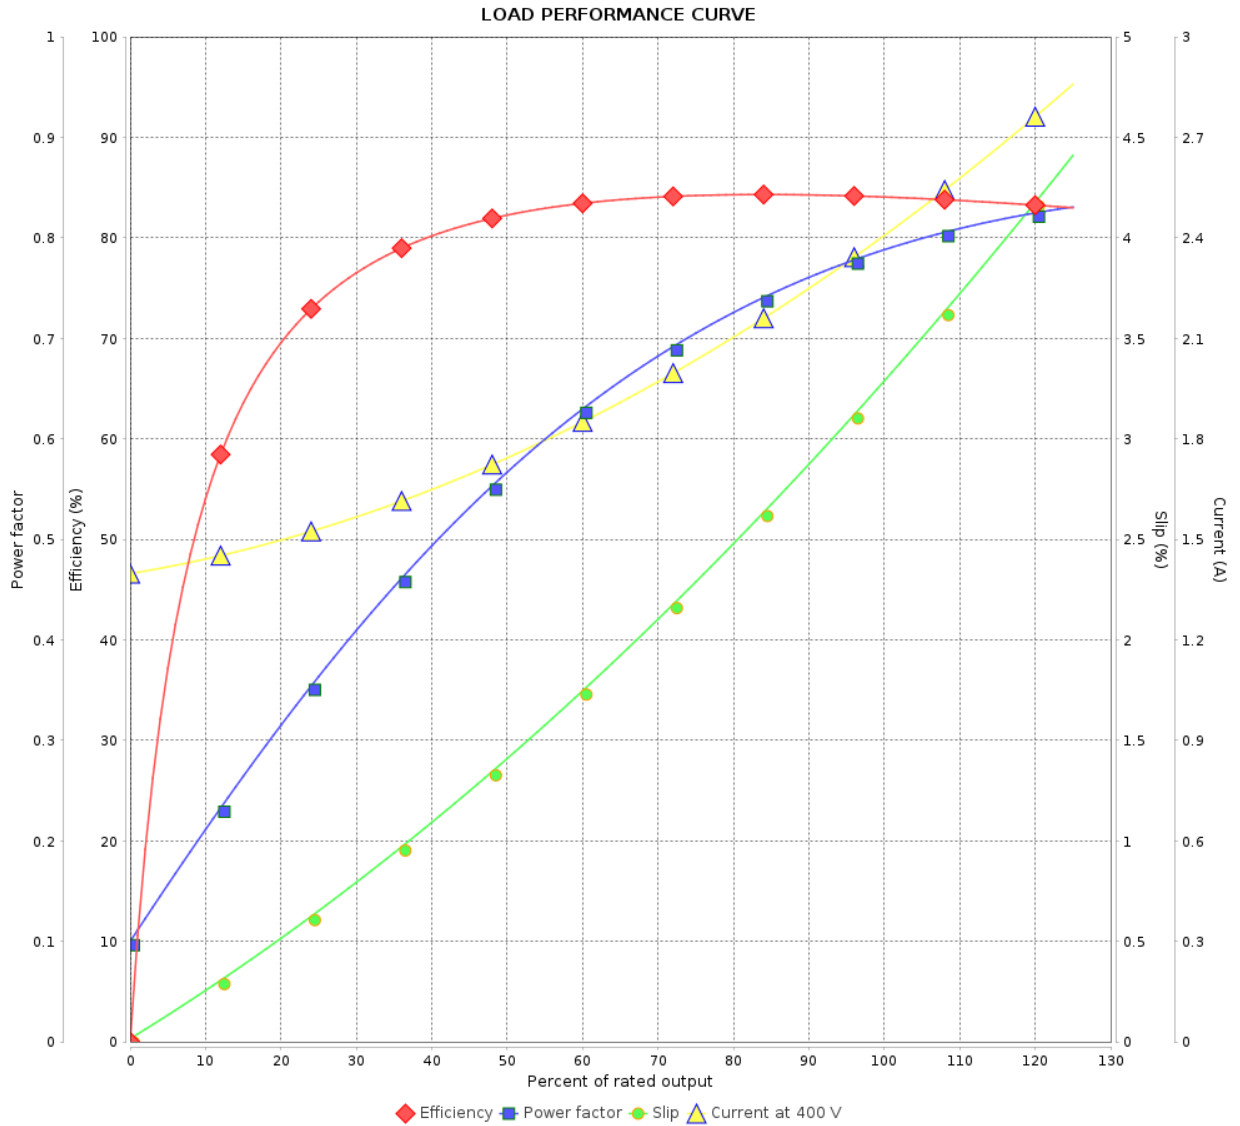

Performance : 400 V 50 Hz 4P IE3

Rated current : 2.33 A
 LRC : 7.0
 Rated torque : 0.751 kgfm
 Locked rotor torque : 250 %
 Breakdown torque : 290 %
 Rated speed : 1445 rpm

Moment of inertia (J) : 0.0060 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 6	Revision
Checked by				
Date	22/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 13166478

LOAD PERFORMANCE CURVE

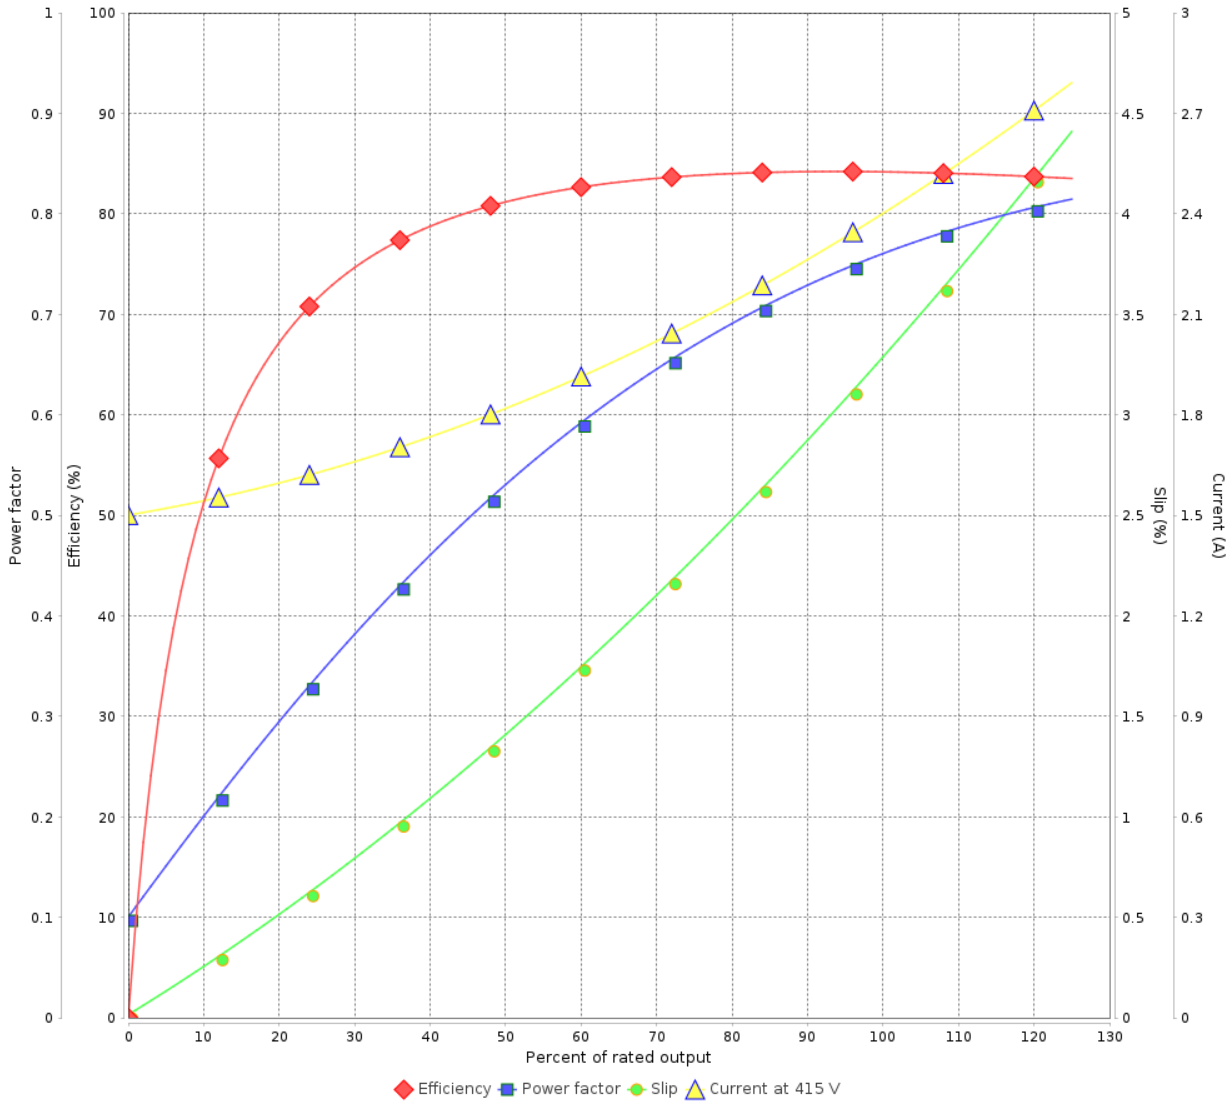

Performance : 415 V 50 Hz 4P IE3

Rated current : 2.30 A	Moment of inertia (J) : 0.0060 kgm ²
LRC : 7.4	Duty cycle : Cont.(S1)
Rated torque : 0.751 kgfm	Insulation class : F
Locked rotor torque : 280 %	Service factor : 1.25
Breakdown torque : 320 %	Temperature rise : 80 K
Rated speed : 1450 rpm	Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 6	Revision
Checked by				
Date	22/10/2024			