

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W21 Explosion Proof NEMA Premium Efficiency Three-Phase      Product code : 13265683

Frame	: 449T	Locked rotor time	: 50s (cold) 28s (hot)
Output	: 200 HP (150 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: 0°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 182 A	Protection degree	: IP55
L. R. Amperes	: 1165 A	Cooling method	: IC411 - TEFC
LRC	: 6.4x(Code G)	Mounting	: F-1
No load current	: 50.9 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 1780 rpm	Starting method	: Direct On Line
Slip	: 1.11 %	Approx. weight <sup>3</sup>	: 1400 kg
Rated torque	: 81.5 kgfm		
Locked rotor torque	: 190 %		
Breakdown torque	: 210 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 4.20 kgm <sup>2</sup>		
Design	: B		

Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	95.8	96.2	96.2	Max. traction	: 798 kgf
Power Factor	0.00	0.78	0.84	0.86	Max. compression	: 2198 kgf

	Drive end	Non drive end
Bearing type	: NU-322 C3	6319 C3
Sealing	: Viton Oil Seal	Viton Seal
Lubrication interval	: 3330 h	7038 h
Lubricant amount	: 60 g	45 g
Lubricant type	: Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 3		
Date	13/01/2024			

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

### Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/01/2024		2 / 3	

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W21 Explosion Proof NEMA Premium  
Efficiency Three-Phase

Product code : 13265683

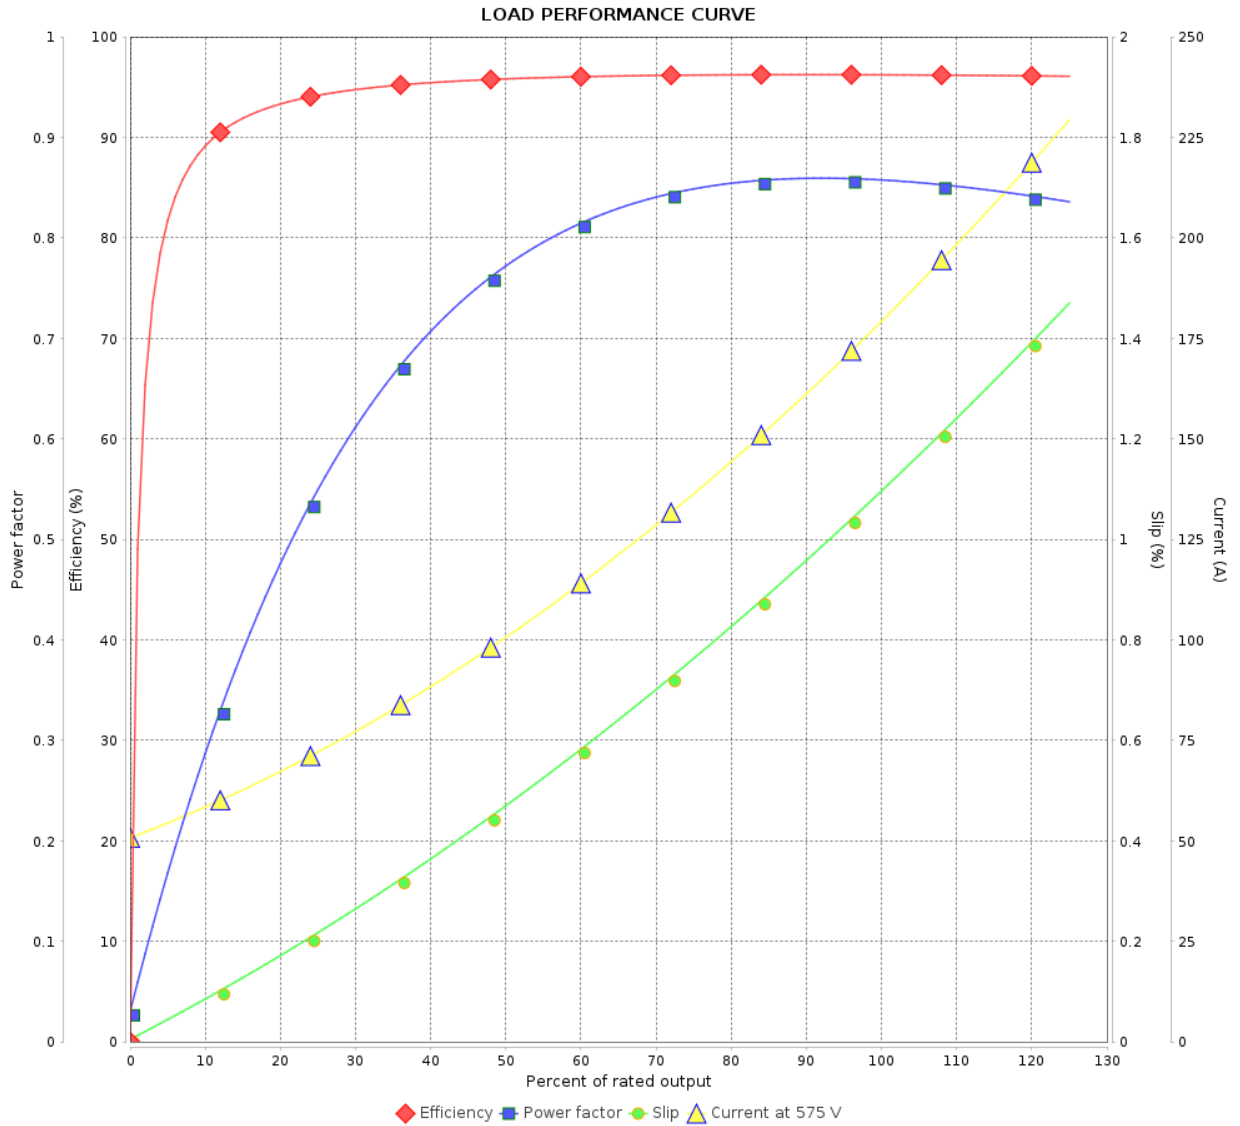

Performance : 575 V 60 Hz 4P

Rated current : 182 A  
 LRC : 6.4  
 Rated torque : 81.5 kgfm  
 Locked rotor torque : 190 %  
 Breakdown torque : 210 %  
 Rated speed : 1780 rpm

Moment of inertia (J) : 4.20 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				