

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer	:				
Product line	: JM Pump NEMA Premium Efficiency Three-Phase	Product code :	13287116		
Frame	: 143/5JM	Cooling method	: IC01 - ODP		
Insulation class	: F	Mounting	: W-6		
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 18.5 kg		
Design	: B	Moment of inertia (J)	: 0.0049 kgm <sup>2</sup>		
Output [HP]	2				
Poles	4				
Frequency [Hz]	60				
Rated voltage [V]	575				
Rated current [A]	2.15				
L. R. Amperes [A]	16.6				
LRC [A]	7.7x(Code K)				
No load current [A]	1.10				
Rated speed [RPM]	1740				
Slip [%]	3.33				
Rated torque [kgfm]	0.834				
Locked rotor torque [%]	260				
Breakdown torque [%]	320				
Service factor	1.15				
Temperature rise	80 K				
Locked rotor time	30s (cold) 17s (hot)				
Noise level <sup>2</sup>	52.0 dB(A)				
Efficiency (%)	25%				
	50%	85.5			
	75%	86.5			
	100%	86.5			
Power Factor	25%				
	50%	0.61			
	75%	0.74			
	100%	0.81			
Bearing type	: Drive end	Non drive end	Foundation loads		
Sealing	: Without	Without	Max. traction	: 67 kgf	
Lubrication interval	: -	-	Max. compression	: 85 kgf	
Lubricant amount	: -	-			
Lubricant type	: Mobil Polyrex EM				
Notes					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	16/05/2022			1 / 2	

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JM Pump NEMA Premium  
Efficiency Three-Phase

Product code : 13287116

LOAD PERFORMANCE CURVE

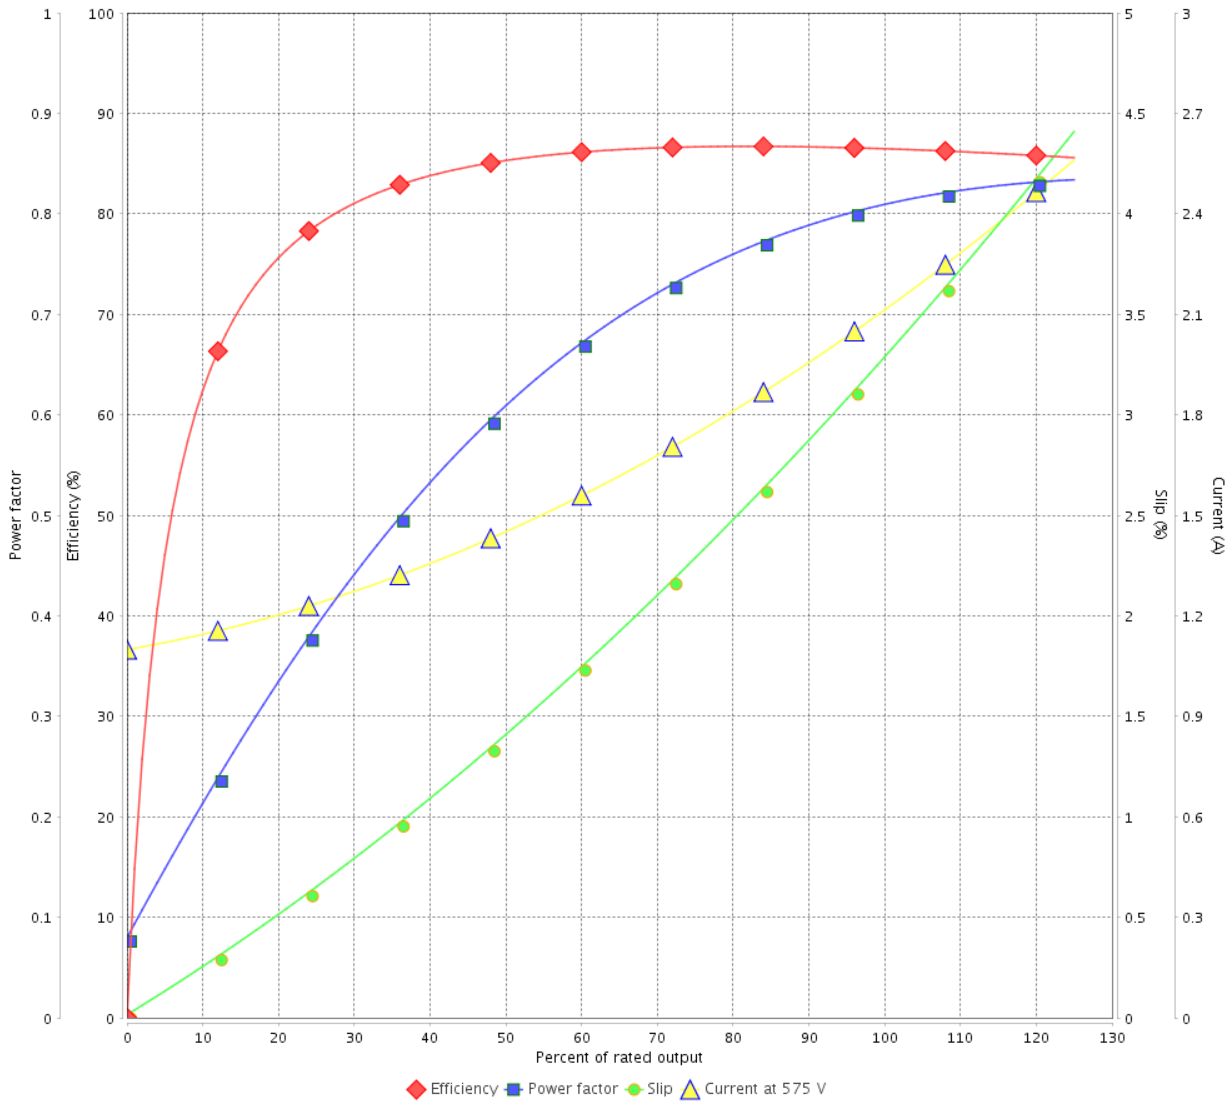

Performance : 575 V 60 Hz 4P

Rated current : 2.15 A  
LRC : 7.7  
Rated torque : 0.834 kgfm  
Locked rotor torque : 260 %  
Breakdown torque : 320 %  
Rated speed : 1740 rpm

Moment of inertia (J) : 0.0049 kgm<sup>2</sup>  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.15  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	16/05/2022			