

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer	:				
Product line	: NEMA Premium Efficiency Three-Phase	Product code :	13290556		
Frame	: 254/6TC	Cooling method	: IC01 - ODP		
Insulation class	: F	Mounting	: W-6		
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 90.5 kg		
Design	: B	Moment of inertia (J)	: 0.0767 kgm <sup>2</sup>		
Output [HP]	15				
Poles	4				
Frequency [Hz]	60				
Rated voltage [V]	575				
Rated current [A]	14.9				
L. R. Amperes [A]	100				
LRC [A]	6.7x(Code H)				
No load current [A]	7.60				
Rated speed [RPM]	1775				
Slip [%]	1.39				
Rated torque [kgfm]	6.13				
Locked rotor torque [%]	240				
Breakdown torque [%]	300				
Service factor	1.15				
Temperature rise	80 K				
Locked rotor time	30s (cold) 17s (hot)				
Noise level <sup>2</sup>	64.0 dB(A)				
Efficiency (%)	25%				
	50%	91.7			
	75%	92.4			
	100%	93.0			
Power Factor	25%				
	50%	0.62			
	75%	0.73			
	100%	0.80			
Bearing type	: Drive end	Non drive end	Foundation loads		
Sealing	: 6309 Z C3	6208 Z C3	Max. traction	: 244 kgf	
Lubrication interval	: Without	Without	Max. compression	: 335 kgf	
Lubricant amount	: Bearing Seal	Bearing Seal			
Lubricant type	: 20000 h	20000 h			
	: 13 g	8 g			
	: Mobil Polyrex EM				
Notes					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by					
Date	13/05/2022			Page	Revision
				1 / 2	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase      Product code : 13290556

LOAD PERFORMANCE CURVE

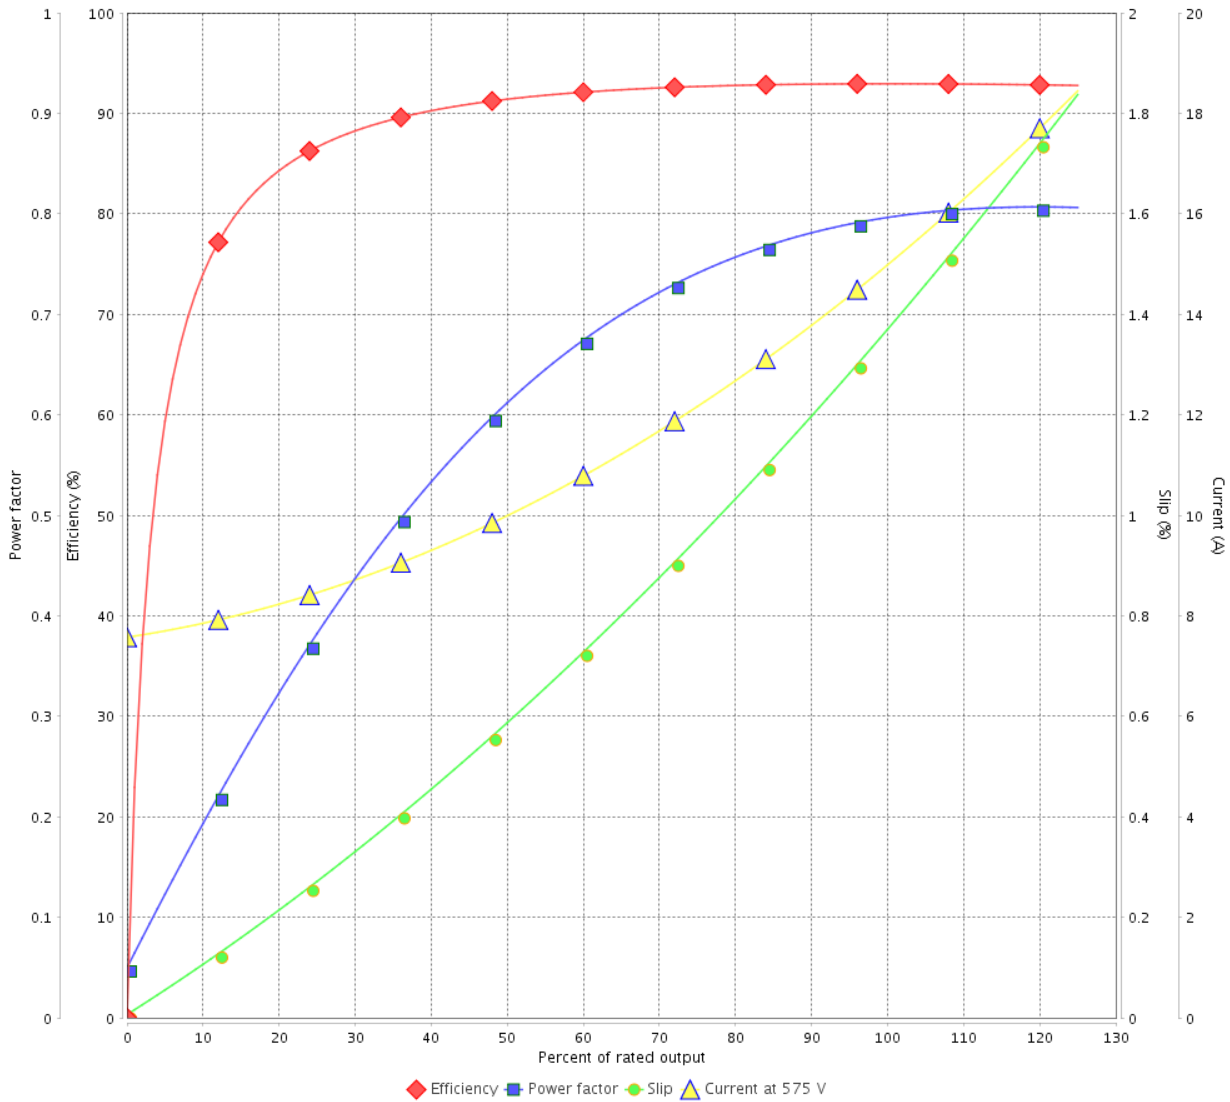

Performance : 575 V 60 Hz 4P

Rated current	: 14.9 A	Moment of inertia (J)	: 0.0767 kgm <sup>2</sup>
LRC	: 6.7	Duty cycle	: Cont.(S1)
Rated torque	: 6.13 kgfm	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.15
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 1775 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	13/05/2022			