

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 IR3 Premium Three-Phase Product code : 13306776

Frame	: 132M	Locked rotor time	: 55s (cold) 31s (hot)
Output	: 5.5 kW (7.5 HP-cv)	Temperature rise	: 80 K
Poles	: 6	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 380 V	Altitude	: 1000 m.a.s.l.
Rated current	: 12.6 A	Protection degree	: IP55
L. R. Amperes	: 94.7 A	Cooling method	: IC411 - TFVE
LRC	: 7.5	Mounting	: B3E
No load current	: 7.53 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1174 rpm	Noise level ²	: 55.0 dB(A)
Slip	: 2.17 %	Starting method	: Direct On Line
Rated torque	: 4.56 kgfm	Approx. weight ³	: 83.1 kg
Locked rotor torque	: 240 %		
Breakdown torque	: 320 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0679 kgm ²		
Design	: N		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	88.0	89.5	91.0	Max. traction	: 228 kgf
Power Factor	0.52	0.65	0.73	Max. compression	: 311 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
9.4	7.6	7.0	5.5	3.8	3.0	2.2

	Drive end	Non drive end
Bearing type	: 6308 ZZ	: 6207 ZZ
Sealing	: V'Ring	: V'Ring
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	: Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in ABNT NBR 17094.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/01/2024		1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IR3 Premium Three-Phase

Product code : 13306776

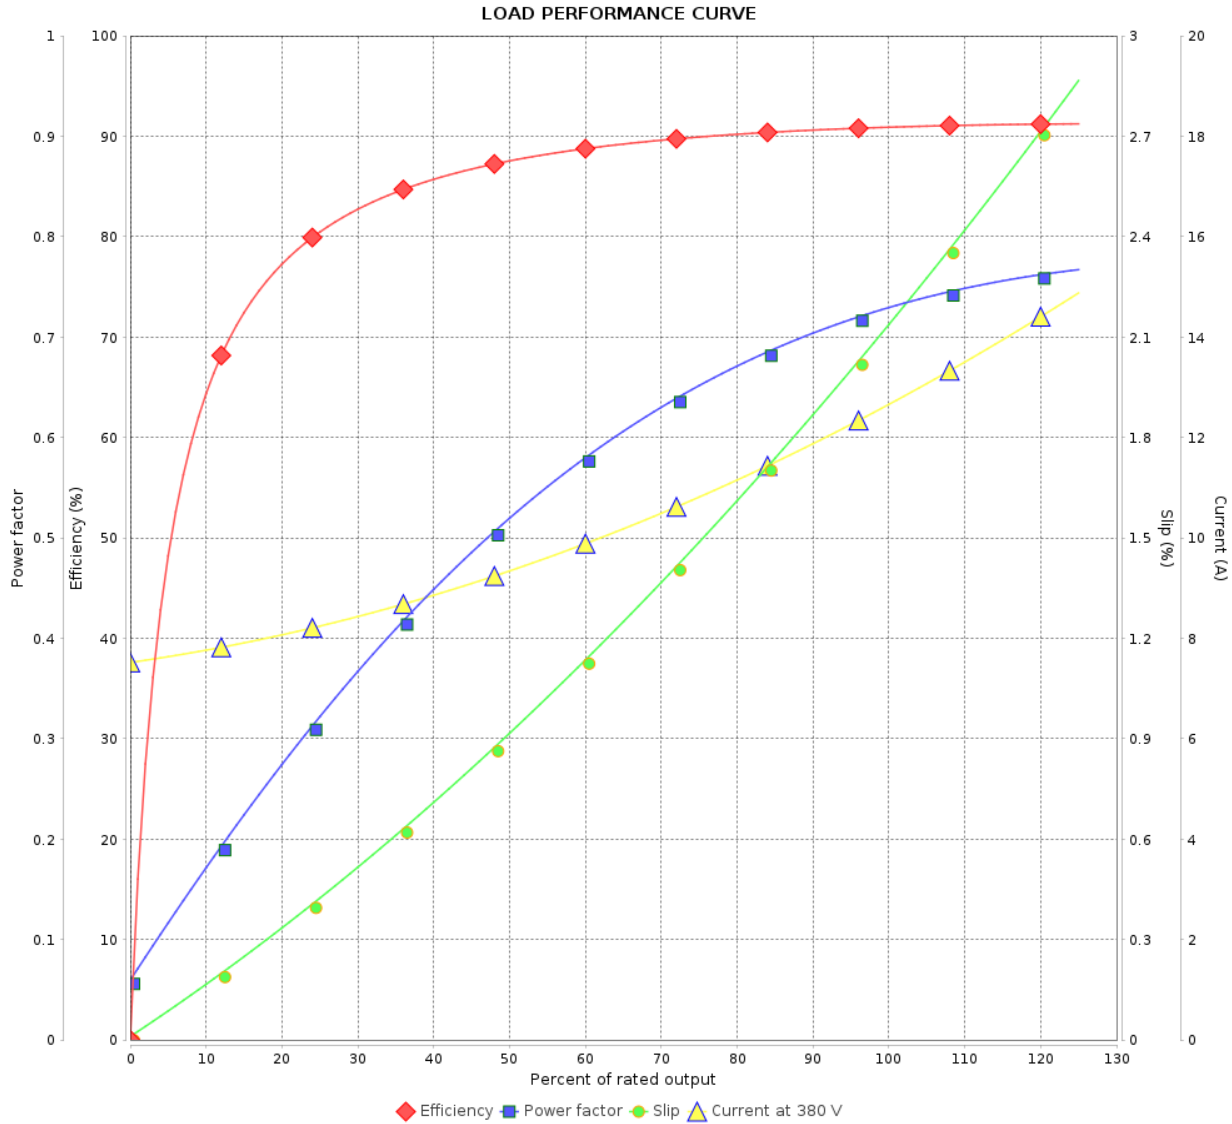

Performance : 380 V 60 Hz 6P

Rated current : 12.6 A
 LRC : 7.5
 Rated torque : 4.56 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 320 %
 Rated speed : 1174 rpm

Moment of inertia (J) : 0.0679 kgm²
 Duty cycle : S1
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	14/01/2024			