

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer : _____

Product line : W22 Close Coupled Pump JP NEMA Premium Efficiency Three-Phase Product code : 13472774

Frame	: 213/5JP	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 81.4 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0268 kgm ²
Design	: A		

Output [HP]	15	10	10	10	15	15	15
Poles	2	2	2	2	2	2	2
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	34.0/17.0	14.5	14.1	14.0	20.6	19.7	19.3
L. R. Amperes [A]	269/134	125	133	140	134	142	149
LRC [A]	7.9x(Code J)	8.6x(Code K)	9.4x(Code L)	10.0x(Code M)	6.5x(Code G)	7.2x(Code H)	7.7x(Code J)
No load current [A]	11.6/5.80	5.60	6.20	6.70	5.60	6.20	6.70
Rated speed [RPM]	3520	2940	2945	2950	2885	2900	2910
Slip [%]	2.22	2.00	1.83	1.67	3.83	3.33	3.00
Rated torque [kgfm]	3.09	2.47	2.46	2.46	3.77	3.75	3.74
Locked rotor torque [%]	240	280	320	340	190	220	240
Breakdown torque [%]	280	340	380	420	220	250	280
Service factor	1.25	1.15	1.15	1.15	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K
Locked rotor time	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	10s (cold) 6s (hot)	12s (cold) 7s (hot)	12s (cold) 7s (hot)
Noise level ²	68.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)
Efficiency (%)	25%	90.0	89.3	88.8	88.2	88.2	89.2
	50%	90.2	89.5	89.0	88.5	88.5	89.5
	75%	91.0	90.1	90.1	90.1	89.0	90.0
	100%	91.0	90.1	90.1	90.1	89.0	90.0
Power Factor	25%	0.51	0.46	0.42	0.38	0.57	0.50
	50%	0.76	0.72	0.68	0.64	0.81	0.75
	75%	0.85	0.82	0.79	0.77	0.88	0.84
	100%	0.89	0.87	0.85	0.83	0.91	0.88

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	9.8	9.8	9.8	9.8	9.8	9.8
	P2 (0,5;1,0)	7.9	7.9	7.9	7.9	7.9	7.9
	P3 (0,25;1,0)	6.9	6.9	6.9	6.9	6.9	6.9
	P4 (0,9;0,5)	4.8	4.8	4.8	4.8	4.8	4.8
	P5 (0,5;0,5)	3.1	3.1	3.1	3.1	3.1	3.1
	P6 (0,5;0,25)	2.0	2.0	2.0	2.0	2.0	2.0
	P7 (0,25;0,25)	1.3	1.3	1.3	1.3	1.3	1.3

Bearing type	: 6309 Z C3	6207 ZZ	Foundation loads Max. traction : 153 kgf Max. compression : 234 kgf
	: V'Ring	V'Ring	
	: 19000 h	40000 h	
	: 13 g	0 g	
	: Mobil Polyrex EM		

This revision replaces and cancel the previous one, which must be eliminated.

(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		1 / 9	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		2 / 9	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JP NEMA
Premium Efficiency Three-Phase

Product code : 13472774

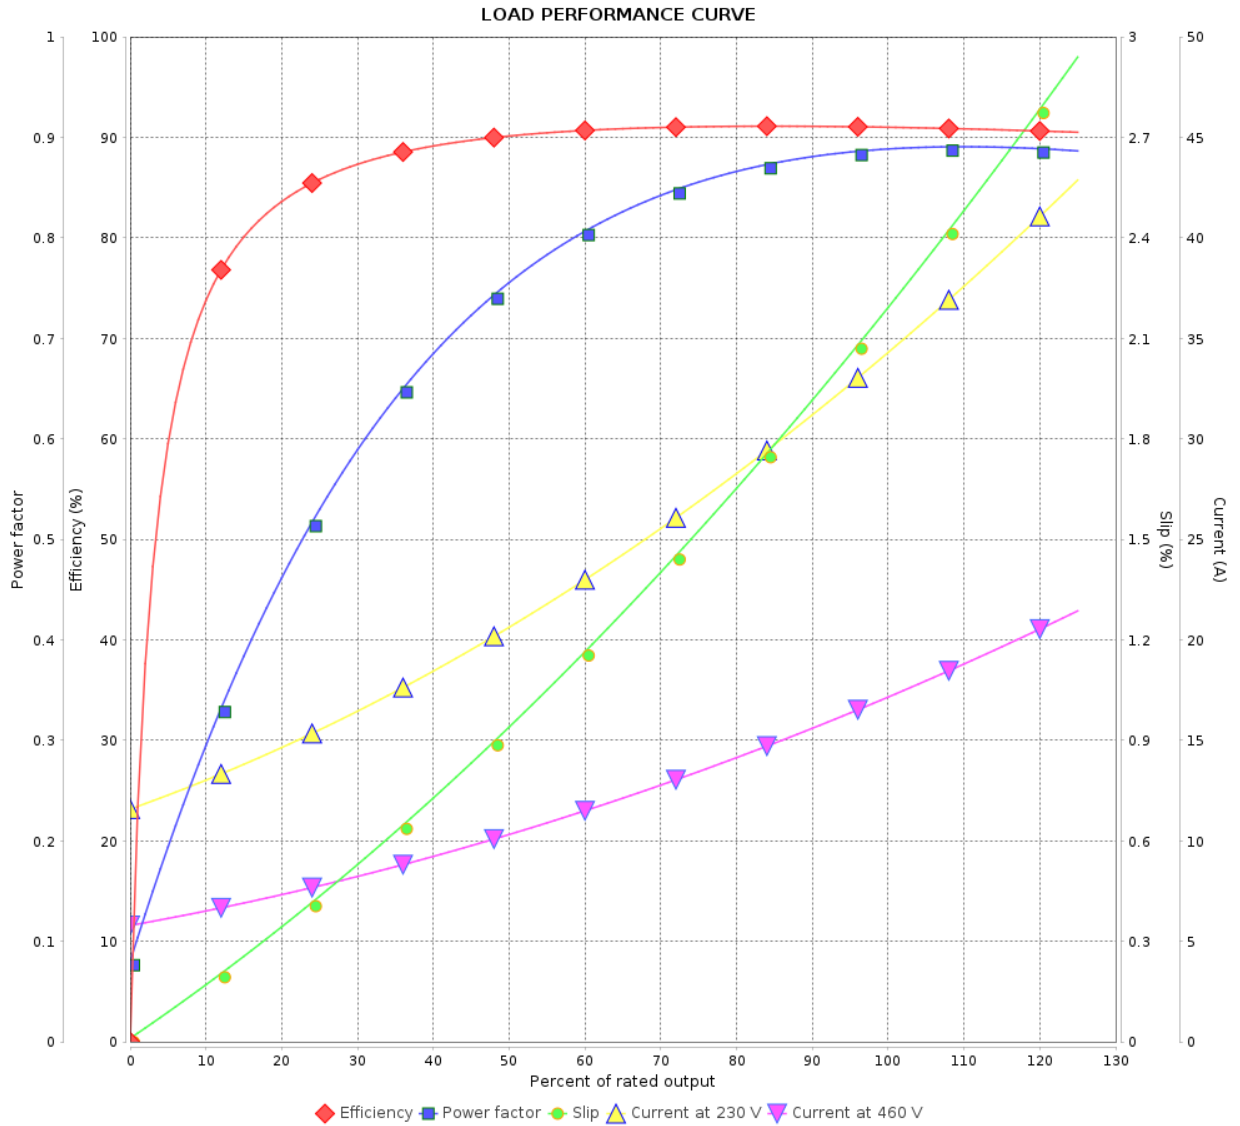

Performance : 230/460 V 60 Hz 2P

Rated current : 34.0/17.0 A
 LRC : 7.9
 Rated torque : 3.09 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 280 %
 Rated speed : 3520 rpm

Moment of inertia (J) : 0.0268 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 9		
Date		15/01/2024		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JP NEMA
Premium Efficiency Three-Phase

Product code : 13472774

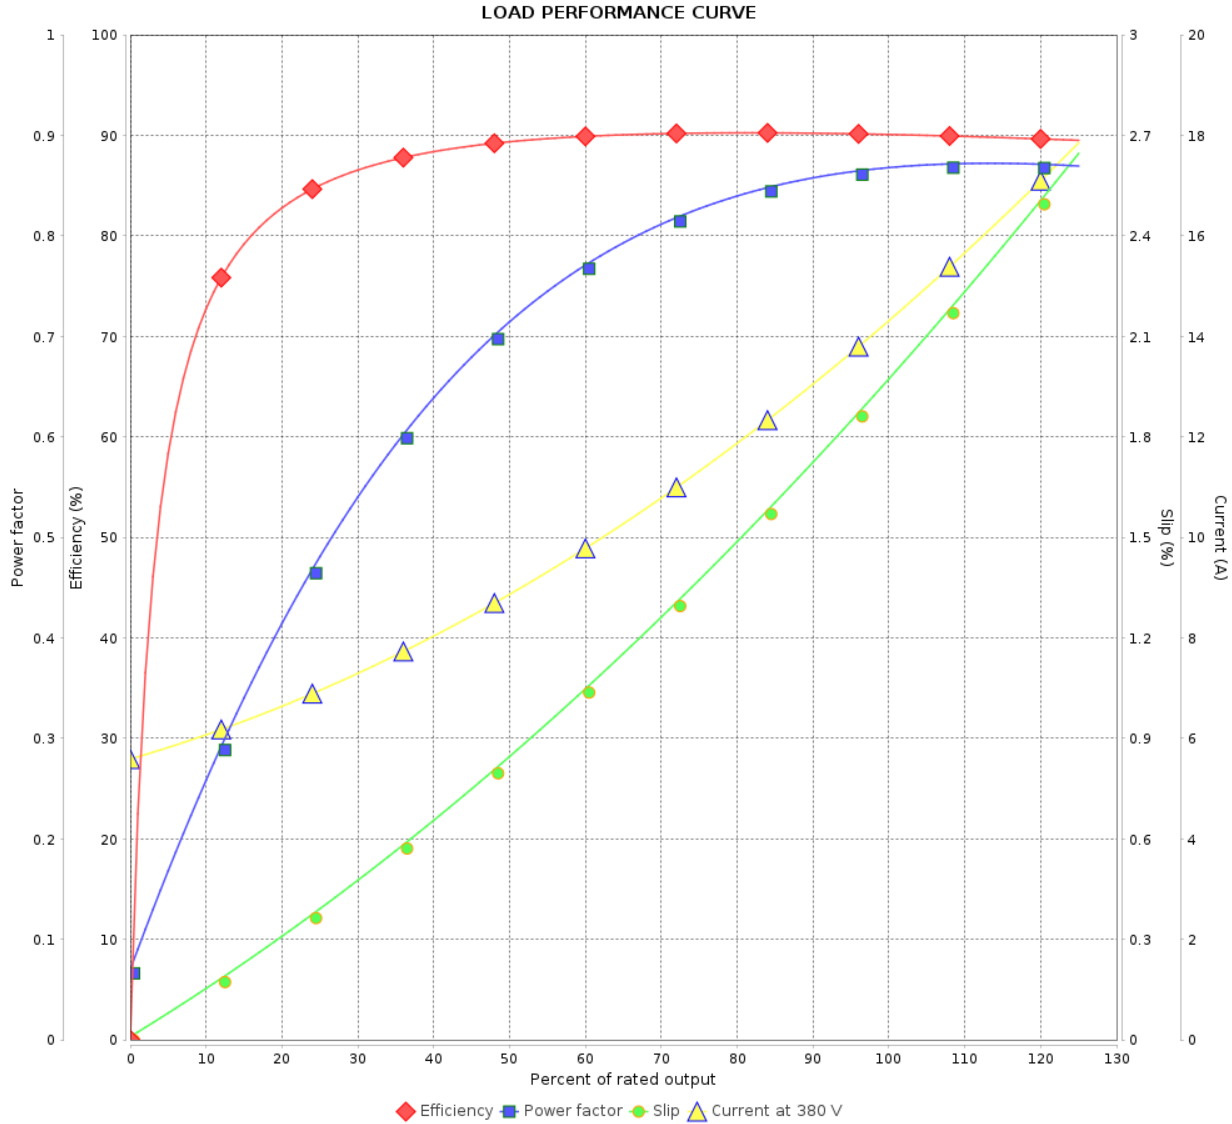

Performance : 380 V 50 Hz 2P IE3

Rated current : 14.5 A
LRC : 8.6
Rated torque : 2.47 kgfm
Locked rotor torque : 280 %
Breakdown torque : 340 %
Rated speed : 2940 rpm

Moment of inertia (J) : 0.0268 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JP NEMA
Premium Efficiency Three-Phase

Product code : 13472774

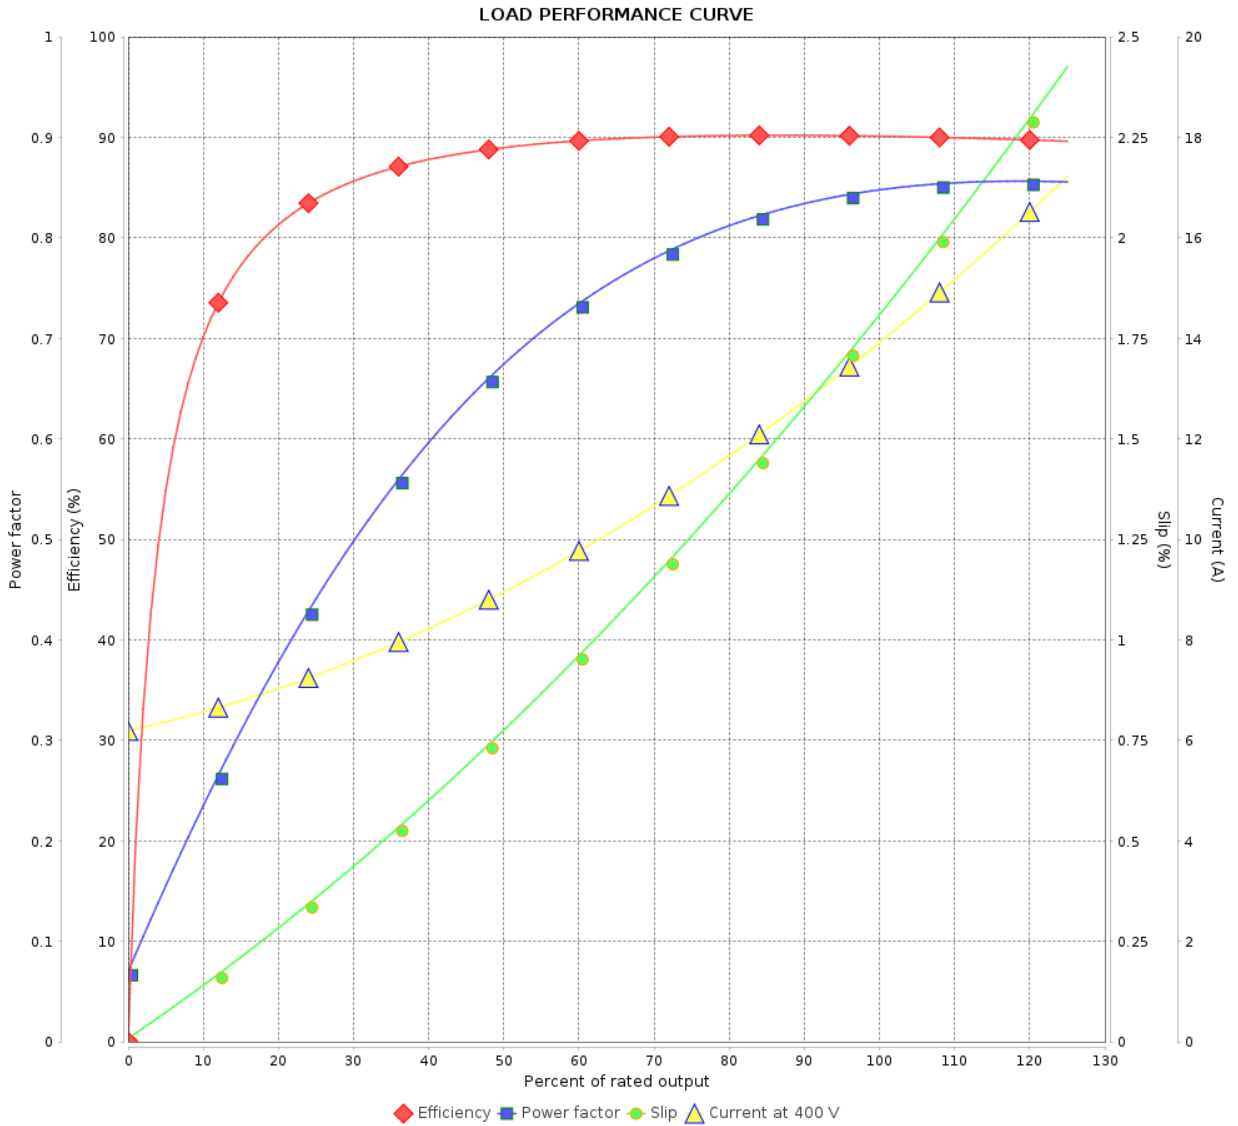

Performance : 400 V 50 Hz 2P IE3

Rated current : 14.1 A
LRC : 9.4
Rated torque : 2.46 kgfm
Locked rotor torque : 320 %
Breakdown torque : 380 %
Rated speed : 2945 rpm

Moment of inertia (J) : 0.0268 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		5 / 9		
Date	15/01/2024			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 Close Coupled Pump JP NEMA
Premium Efficiency Three-Phase

Product code : 13472774

LOAD PERFORMANCE CURVE

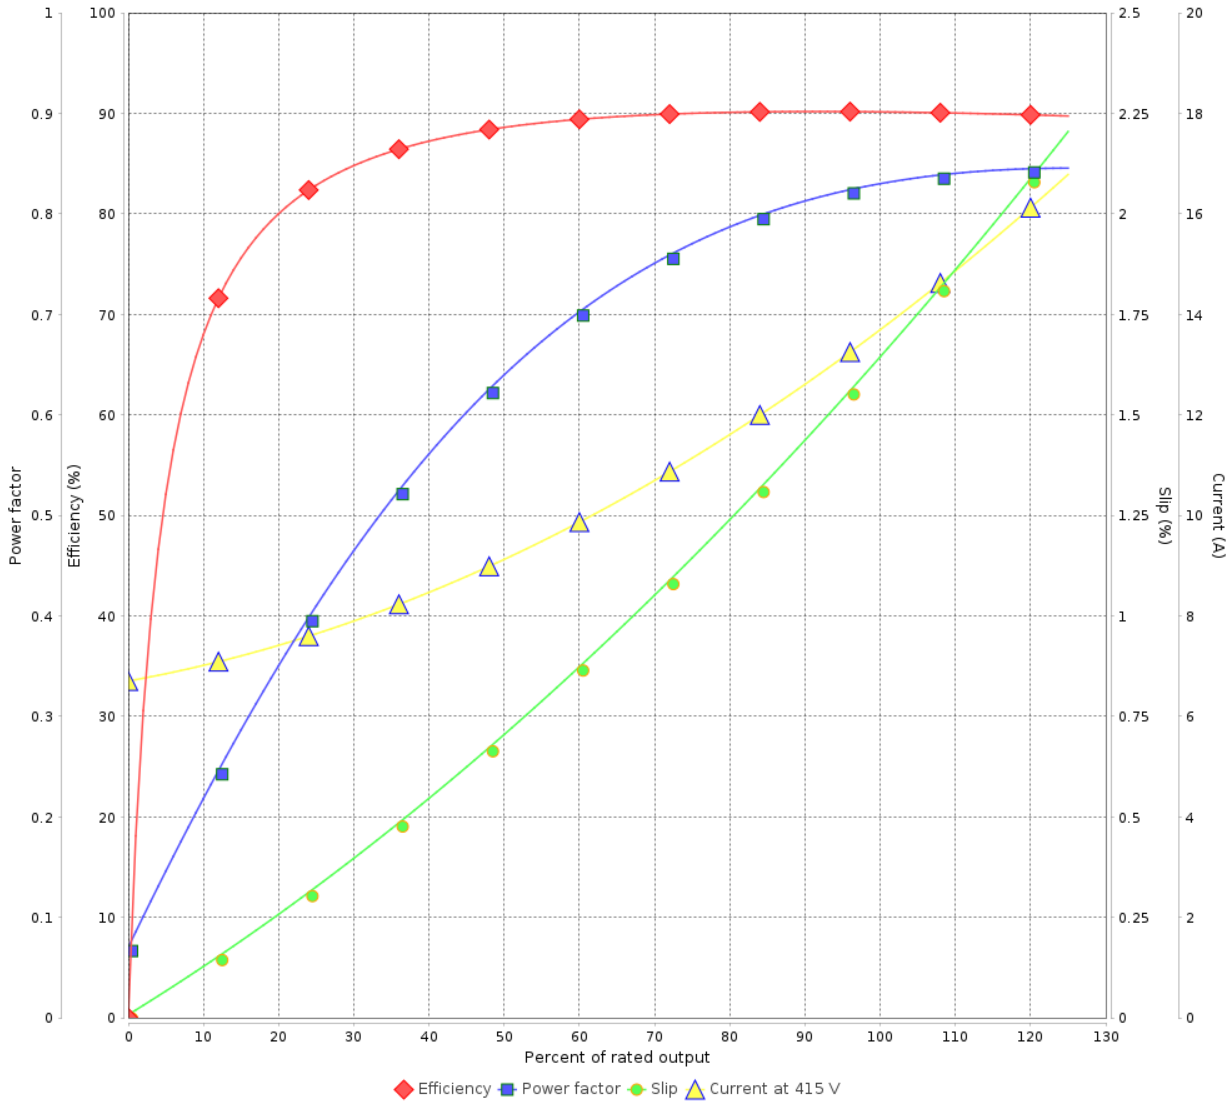

Performance : 415 V 50 Hz 2P IE3

Rated current : 14.0 A
LRC : 10.0
Rated torque : 2.46 kgfm
Locked rotor torque : 340 %
Breakdown torque : 420 %
Rated speed : 2950 rpm

Moment of inertia (J) : 0.0268 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JP NEMA
Premium Efficiency Three-Phase

Product code : 13472774

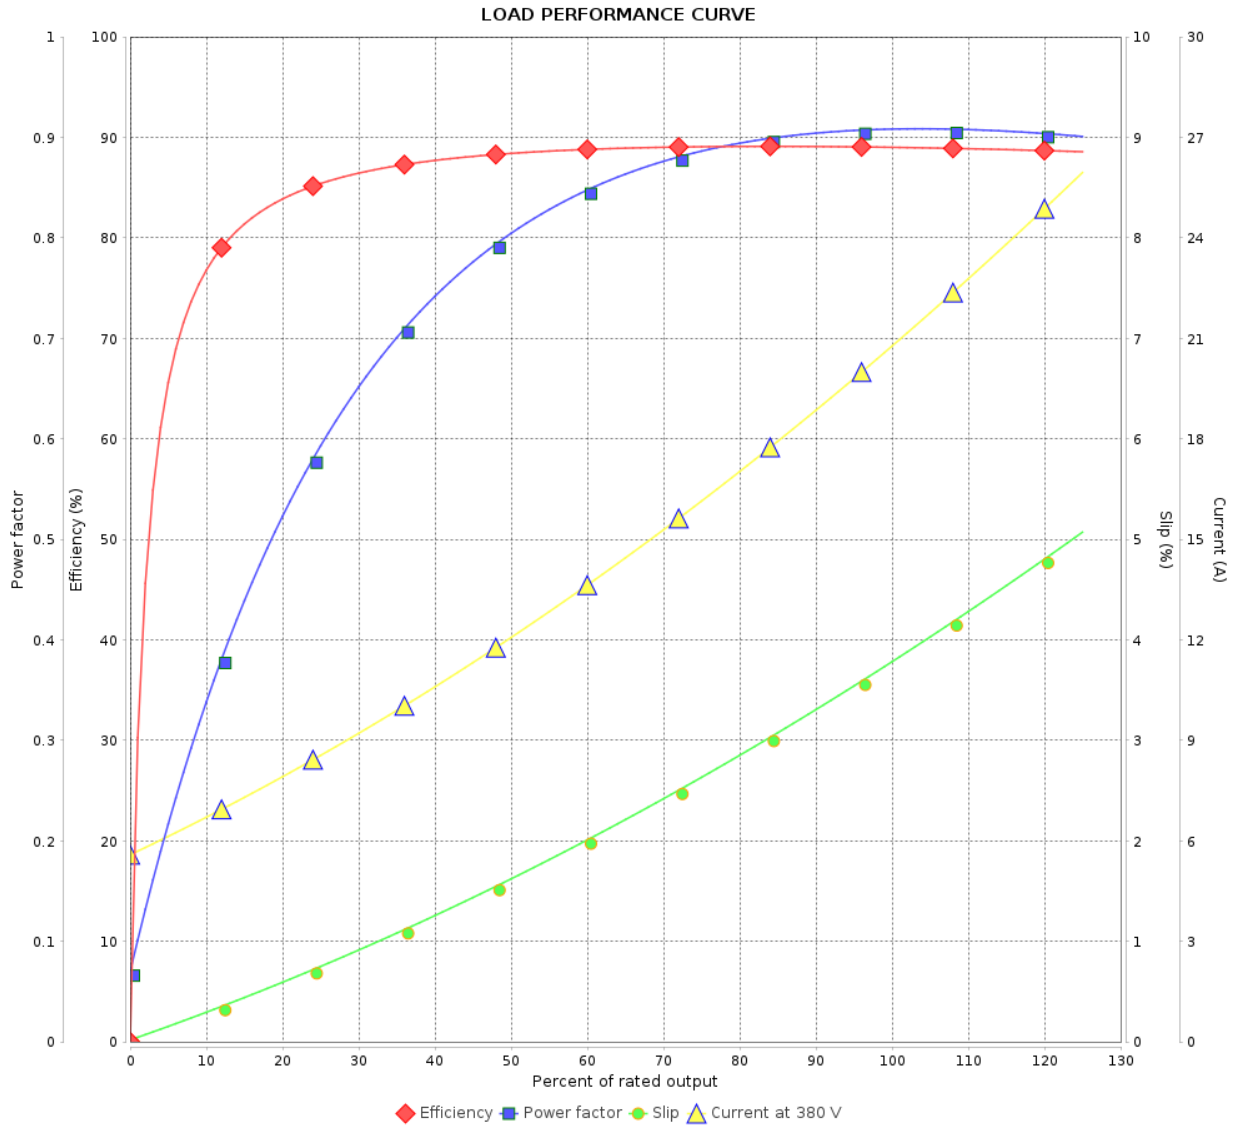

Performance : 380 V 50 Hz 2P IE1

Rated current : 20.6 A
LRC : 6.5
Rated torque : 3.77 kgfm
Locked rotor torque : 190 %
Breakdown torque : 220 %
Rated speed : 2885 rpm

Moment of inertia (J) : 0.0268 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 105 K
Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 Close Coupled Pump JP NEMA
Premium Efficiency Three-Phase

Product code : 13472774

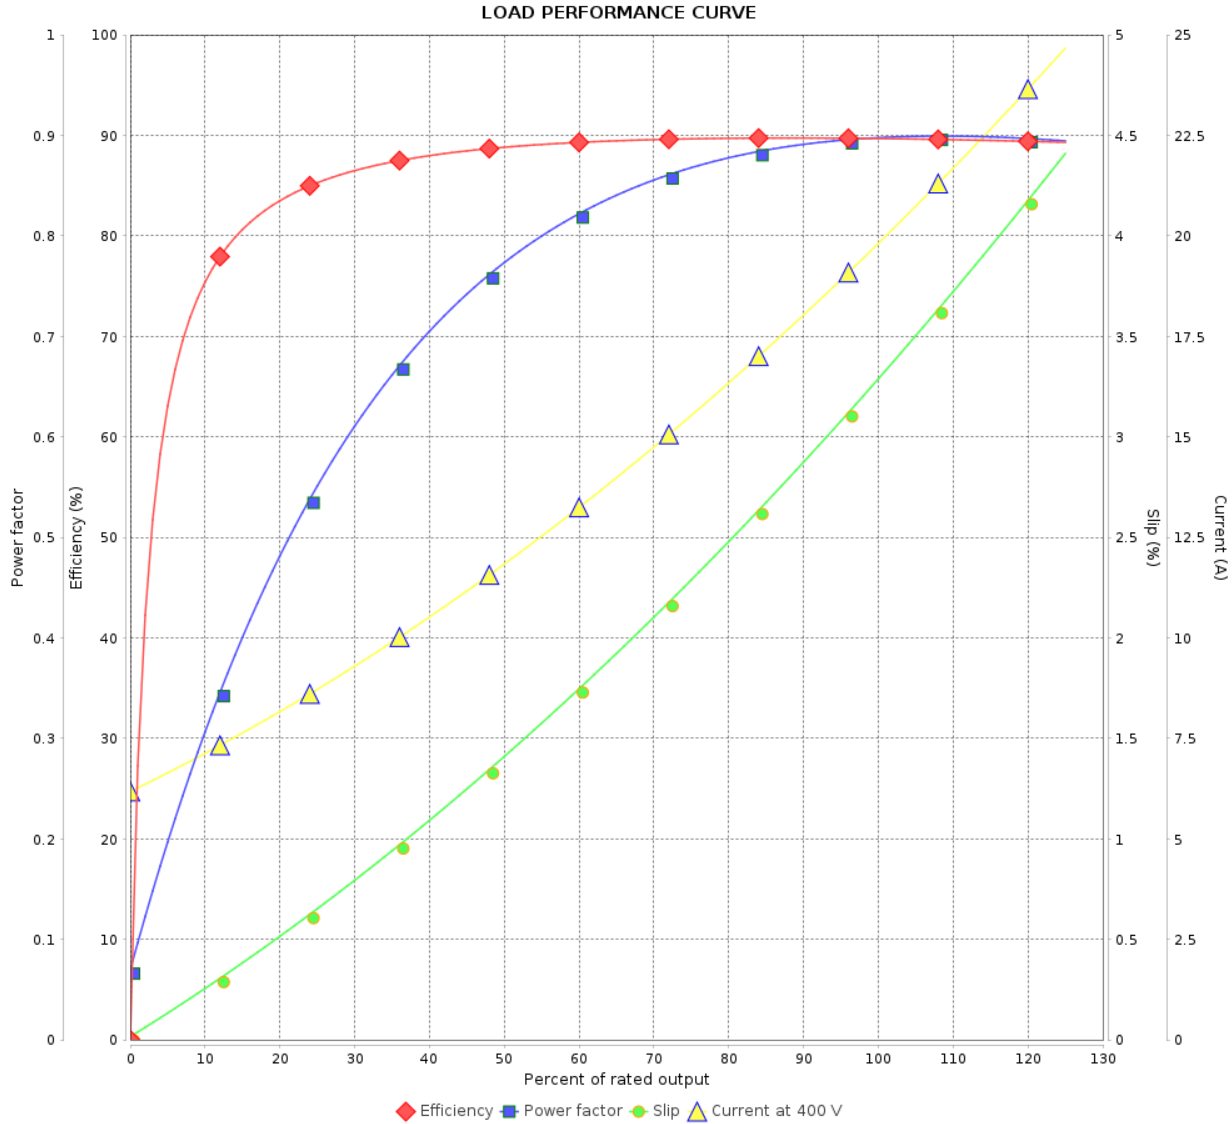

Performance : 400 V 50 Hz 2P IE2

Rated current : 19.7 A
LRC : 7.2
Rated torque : 3.75 kgfm
Locked rotor torque : 220 %
Breakdown torque : 250 %
Rated speed : 2900 rpm

Moment of inertia (J) : 0.0268 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 105 K
Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 Close Coupled Pump JP NEMA
Premium Efficiency Three-Phase

Product code : 13472774

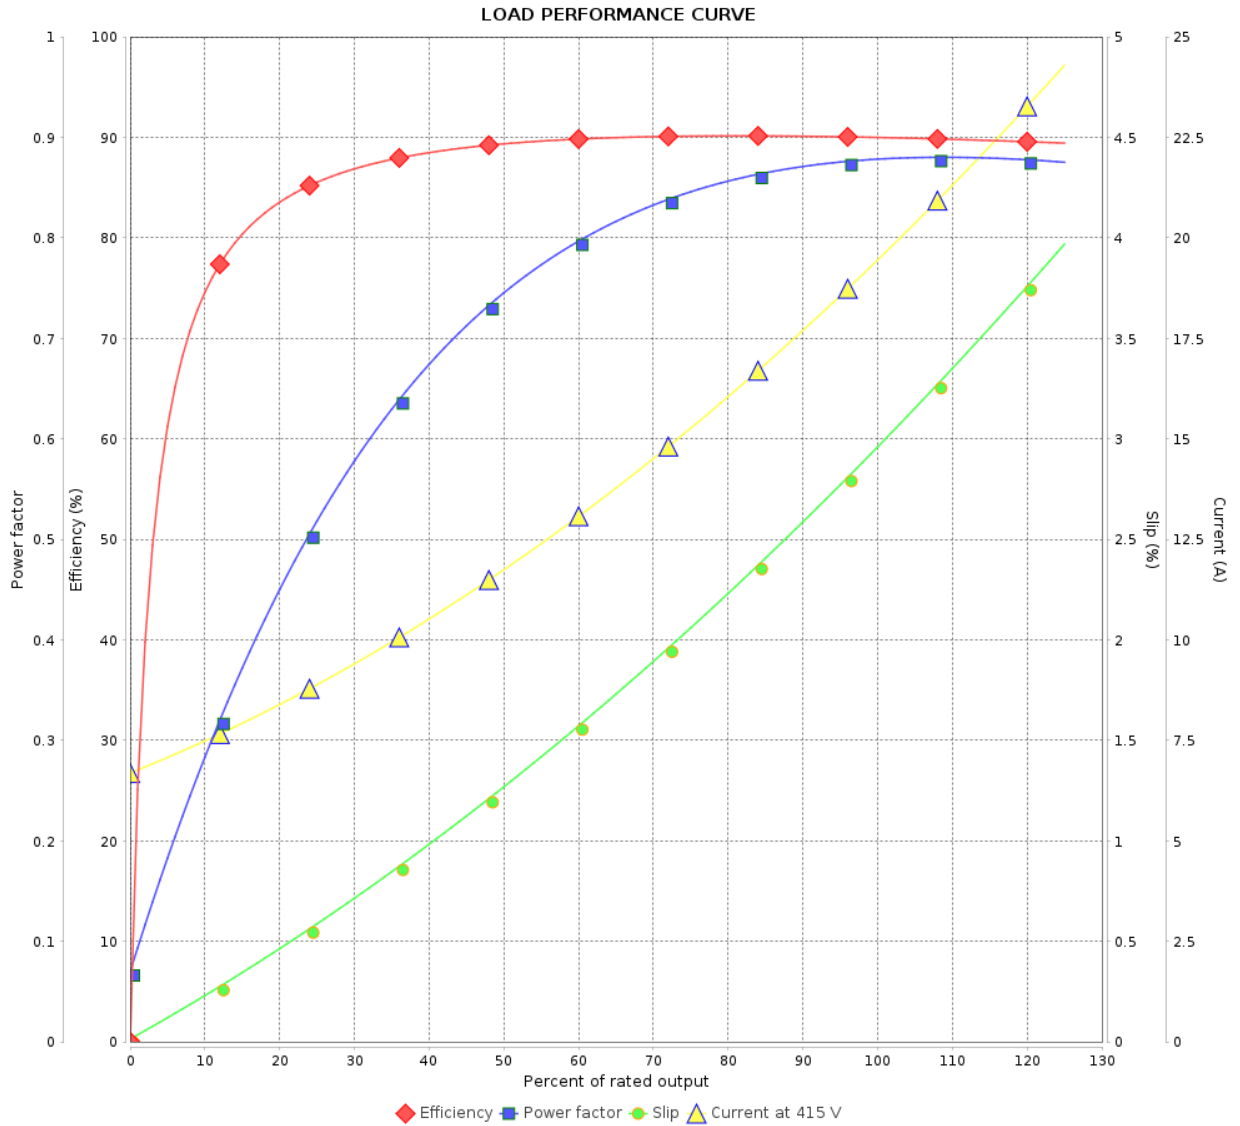

Performance : 415 V 50 Hz 2P IE2

Rated current : 19.3 A
 LRC : 7.7
 Rated torque : 3.74 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 280 %
 Rated speed : 2910 rpm

Moment of inertia (J) : 0.0268 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				