

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :		
Product line	: JM Pump NEMA Premium Efficiency Three-Phase	
Product code :	13482592	
Frame	: 143/5JM	
Insulation class	: F	
Duty cycle	: Cont.(S1)	
Ambient temperature	: -20°C to +40°C	
Altitude	: 1000 m.a.s.l.	
Design	: B	
Cooling method	: IC01 - ODP	
Mounting	: W-6	
Rotation <sup>1</sup>	: Both (CW and CCW)	
Starting method	: Direct On Line	
Approx. weight <sup>3</sup>	: 18.5 kg	
Moment of inertia (J)	: 0.0049 kgm <sup>2</sup>	
Output [HP]	2	
Poles	4	
Frequency [Hz]	60	
Rated voltage [V]	230/460	
Rated current [A]	5.38/2.69	
L. R. Amperes [A]	41.4/20.7	
LRC [A]	7.7x(Code K)	
No load current [A]	2.75/1.38	
Rated speed [RPM]	1740	
Slip [%]	3.33	
Rated torque [kgfm]	0.834	
Locked rotor torque [%]	260	
Breakdown torque [%]	320	
Service factor	1.00	
Temperature rise	80 K	
Locked rotor time	30s (cold) 17s (hot)	
Noise level <sup>2</sup>	52.0 dB(A)	
Efficiency (%)	25%	85.2
	50%	85.5
	75%	86.5
	100%	86.5
Power Factor	25%	0.36
	50%	0.61
	75%	0.74
	100%	0.81
Bearing type	: Drive end 6206 ZZ Non drive end 6203 ZZ	
Sealing	: Without Without Bearing Seal Bearing Seal	
Lubrication interval	: - -	
Lubricant amount	: - -	
Lubricant type	: Mobil Polyrex EM	
Foundation loads	Max. traction : 66 kgf Max. compression : 85 kgf	
Notes USABLE @208V 5.95A SF 1.00 SFA 5.95A		
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		
These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	
Performed by	Performed	
Checked by	Checked	
Date	16/05/2022	
Page	1 / 4	
Revision		

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JM Pump NEMA Premium  
Efficiency Three-Phase

Product code : 13482592

LOAD PERFORMANCE CURVE

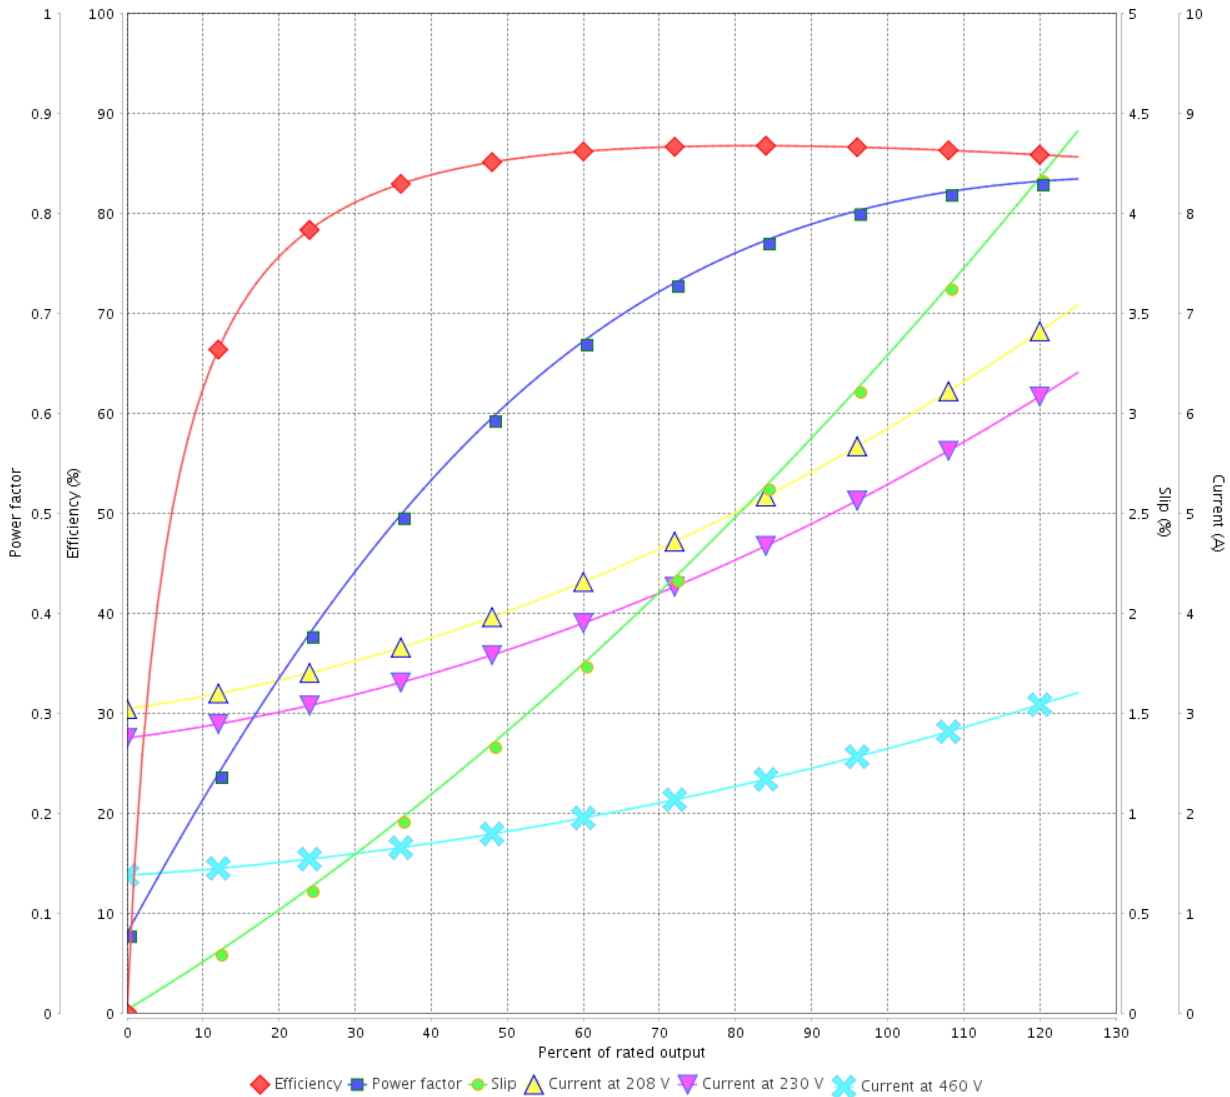

Performance : 230/460 V 60 Hz 4P

Rated current : 5.38/2.69 A  
 LRC : 7.7  
 Rated torque : 0.834 kgfm  
 Locked rotor torque : 260 %  
 Breakdown torque : 320 %  
 Rated speed : 1740 rpm

Moment of inertia (J) : 0.0049 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor :  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : JM Pump NEMA Premium  
Efficiency Three-Phase

Product code : 13482592

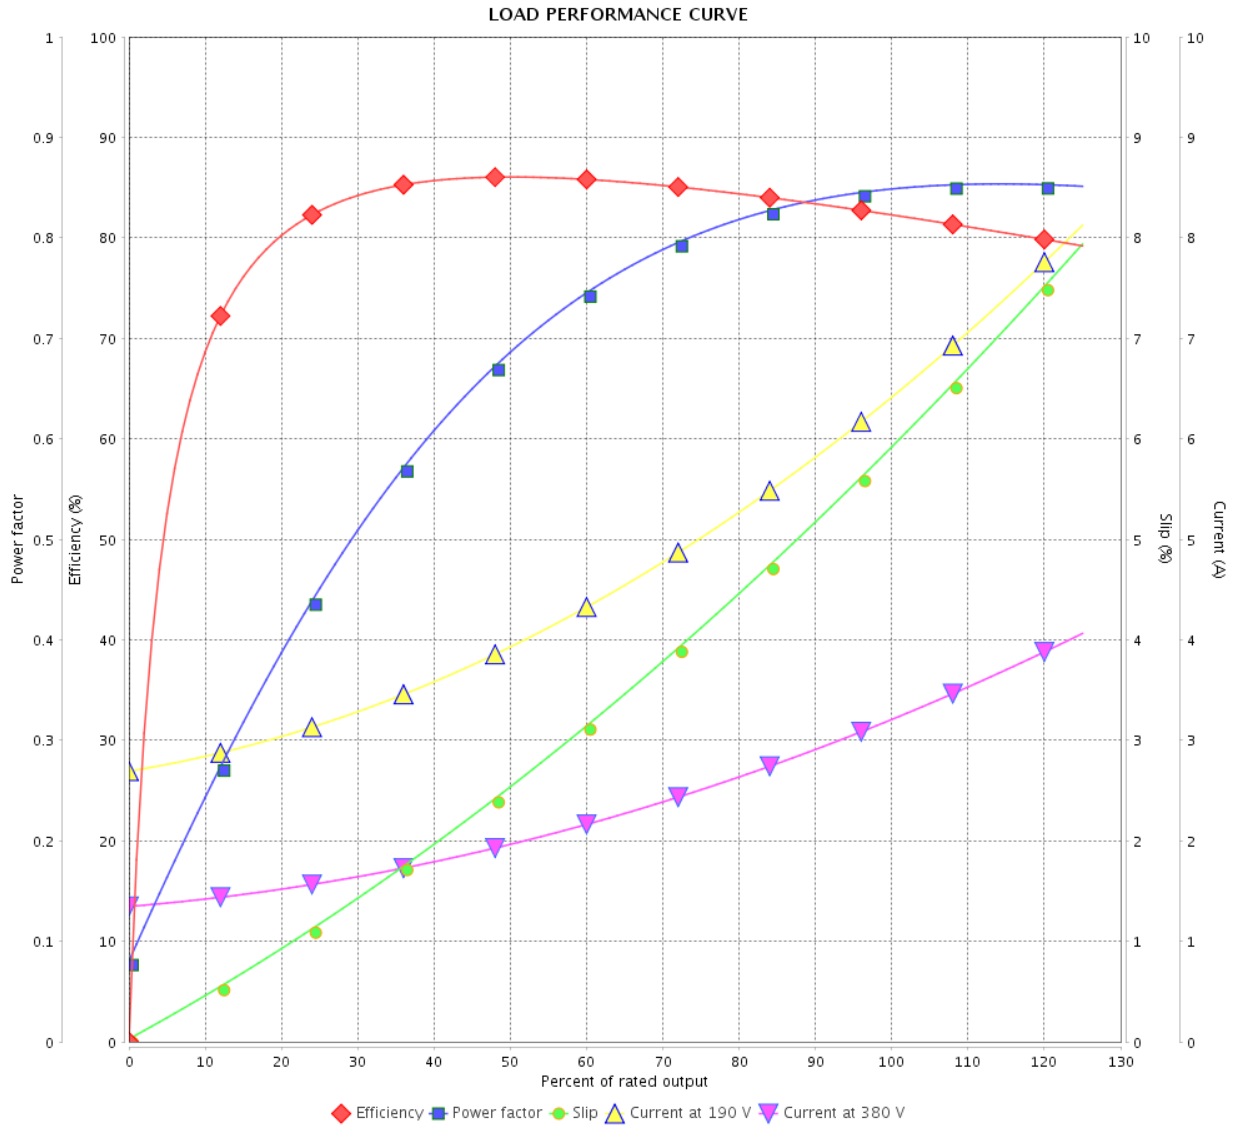

Performance : 190/380 V 50 Hz 4P

Rated current : 6.52/3.26 A  
 LRC : 5.6  
 Rated torque : 1.03 kgfm  
 Locked rotor torque : 200 %  
 Breakdown torque : 229 %  
 Rated speed : 1410 rpm

Moment of inertia (J) : 0.0049 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 105 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 4		
Date		16/05/2022		

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JM Pump NEMA Premium  
Efficiency Three-Phase

Product code : 13482592

LOAD PERFORMANCE CURVE

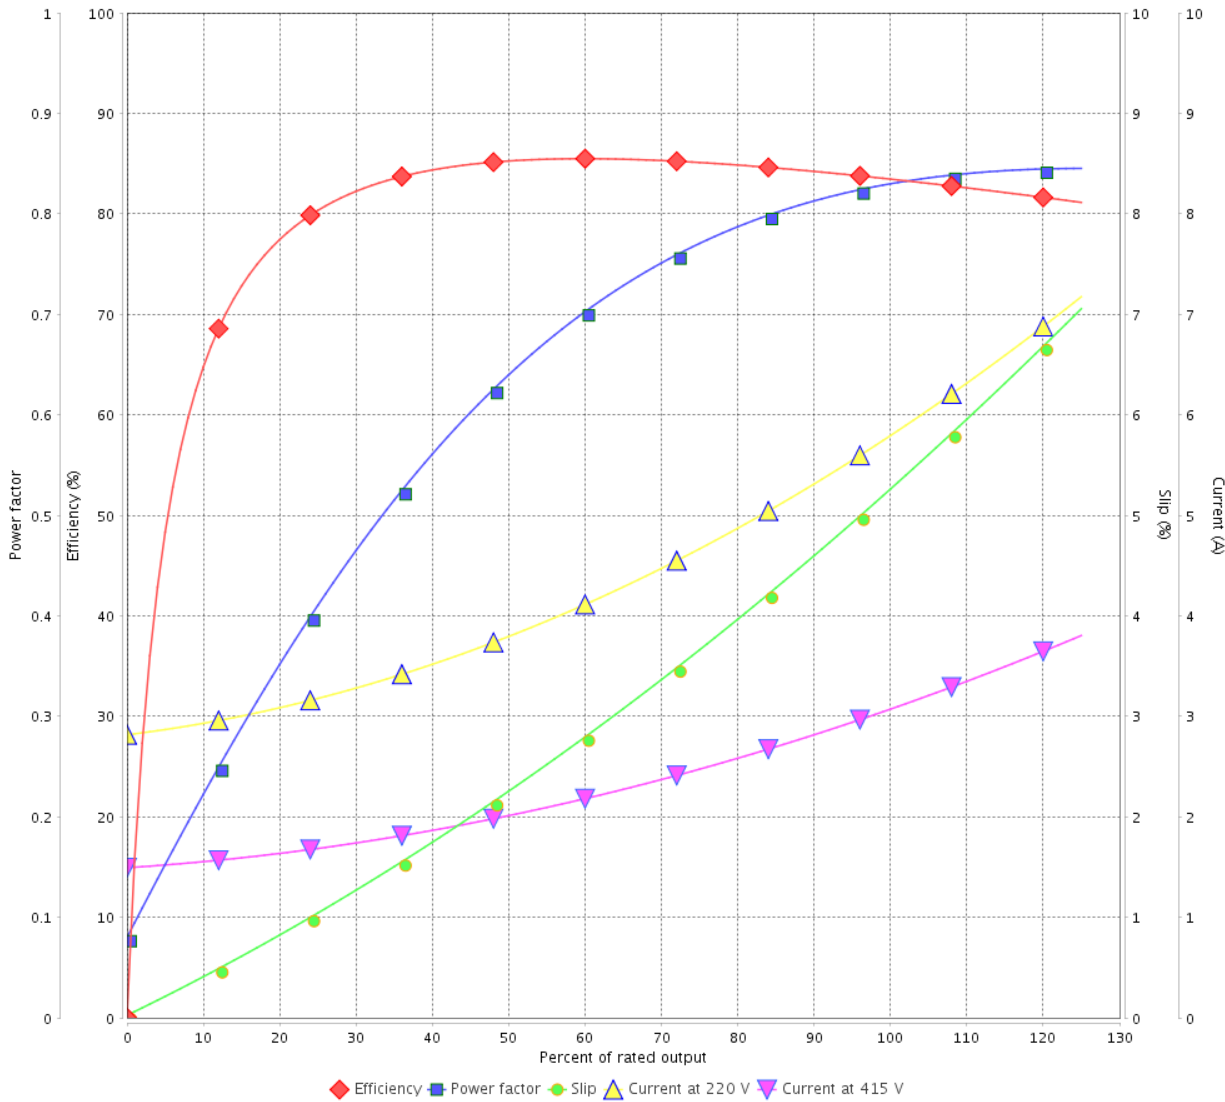

Performance : 220/415 V 50 Hz 4P

Rated current : 5.90/3.13 A  
LRC : 6.2  
Rated torque : 1.02 kgfm  
Locked rotor torque : 220 %  
Breakdown torque : 260 %  
Rated speed : 1420 rpm

Moment of inertia (J) : 0.0049 kgm<sup>2</sup>  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.00  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				