

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel JP Pump NEMA Premium Efficiency Three-Phase Product code : 13482979

Frame	: 213/5JP	Locked rotor time	: 39s (cold) 22s (hot)
Output	: 10 HP (7.5 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 9.92 A	Cooling method	: IC01 - ODP
L. R. Amperes	: 67.5 A	Mounting	: W-6
LRC	: 6.8x(Code H)	Rotation ¹	: Both (CW and CCW)
No load current	: 4.48 A	Noise level ²	: 66.0 dB(A)
Rated speed	: 3535 rpm	Vibration	: A
Slip	: 1.81 %	Starting method	: Direct On Line
Rated torque	: 2 kgfm	Approx. weight ³	: 52.9 kg
Locked rotor torque	: 200 %		: 207N (ISO 12944 - C2)
Breakdown torque	: 280 %		: Munsell N 1 - Matte
Insulation class	: F	Design	: B
Service factor	: 1.15		
Moment of inertia (J)	: 0.0196 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	88.5	89.5	89.5	Max. traction	: 80 kgf
Power Factor	0.68	0.80	0.85	Max. compression	: 132 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6209 ZZ	6206 ZZ
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 2 Revision		
Checked by				
Date	25/09/2026			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel JP Pump NEMA
Premium Efficiency Three-Phase

Product code : 13482979

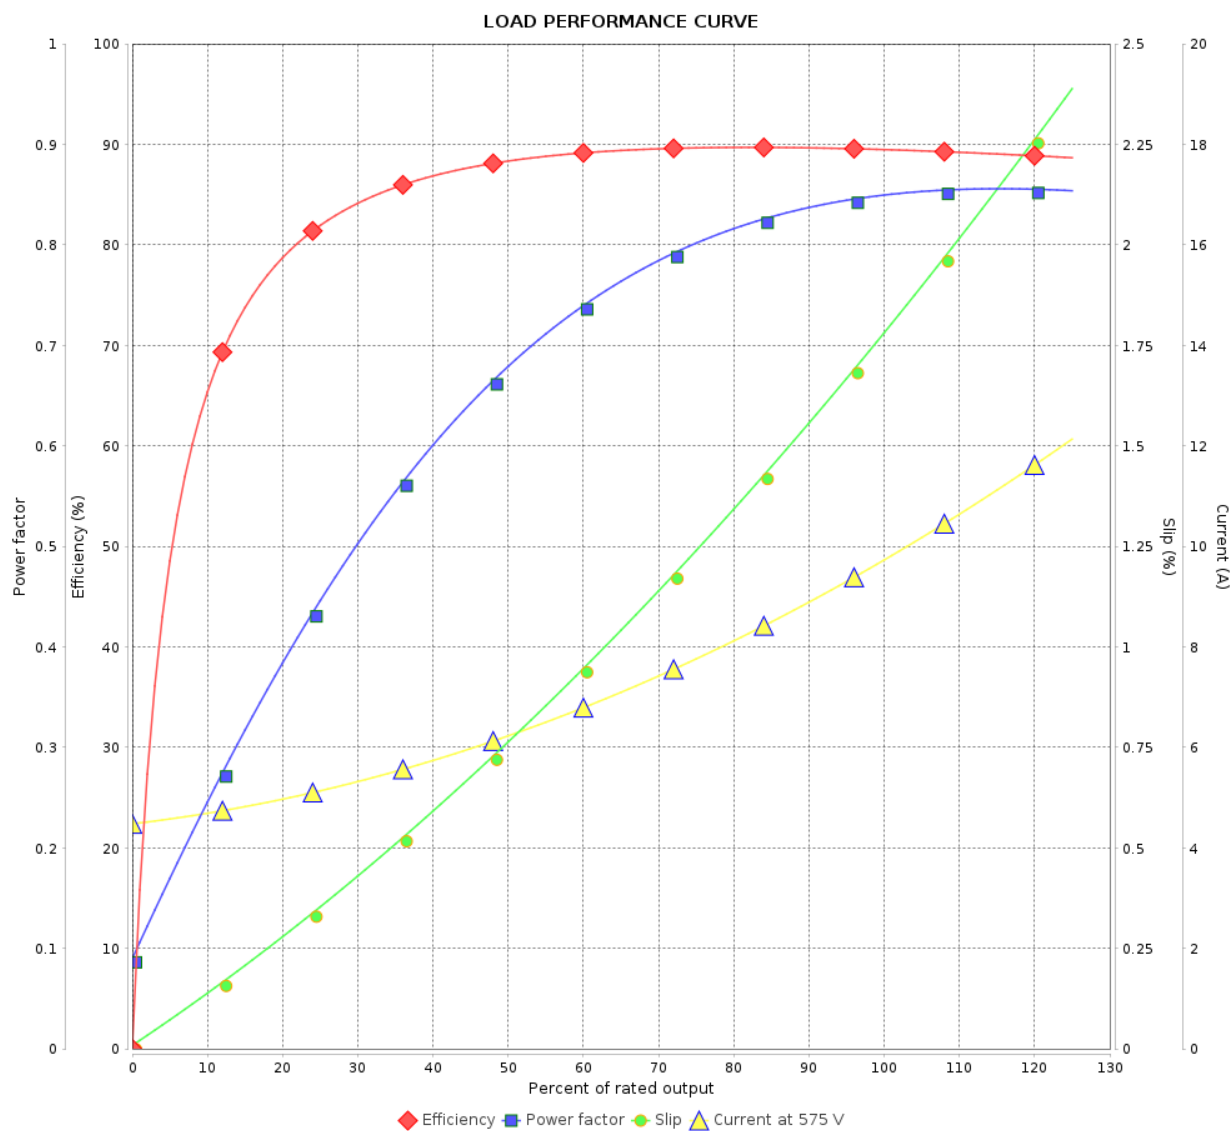

Performance : 575 V 60 Hz 2P

Rated current : 9.92 A
LRC : 6.8
Rated torque : 2 kgfm
Locked rotor torque : 200 %
Breakdown torque : 280 %
Rated speed : 3535 rpm

Moment of inertia (J) : 0.0196 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 2	Revision
Checked by					
Date	25/09/2026				