

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line		: W22 IEEE 841 NEMA Premium Efficiency Three-Phase			Product code : 13516376	
Frame	: 213/5T			Locked rotor time	: 36s (cold) 20s (hot)	
Output	: 7.5 HP (5.5 kW)			Temperature rise	: 80 K	
Poles	: 4			Duty cycle	: Cont.(S1)	
Frequency	: 60 Hz			Ambient temperature	: -20°C to +40°C	
Rated voltage	: 575 V			Altitude	: 1000 m.a.s.l.	
Rated current	: 7.34 A			Protection degree	: IP56	
L. R. Amperes	: 52.1 A			Cooling method	: IC411 - TEFC	
LRC	: 7.1x(Code H)			Mounting	: F-1	
No load current	: 3.36 A			Rotation <sup>1</sup>	: Both (CW and CCW)	
Rated speed	: 1765 rpm			Noise level <sup>2</sup>	: 58.0 dB(A)	
Slip	: 1.94 %			Starting method	: Direct On Line	
Rated torque	: 3.08 kgfm			Approx. weight <sup>3</sup>	: 80.7 kg	
Locked rotor torque	: 220 %					
Breakdown torque	: 310 %					
Insulation class	: F					
Service factor	: 1.25					
Moment of inertia (J)	: 0.0566 kgm <sup>2</sup>					
Design	: B					
Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	88.6	89.5	91.0	91.7	Max. traction : 136 kgf	
Power Factor	0.40	0.66	0.76	0.82	Max. compression : 217 kgf	
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
8.8	7.0	6.5	4.9	3.3	2.4	1.6
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6308 C3		6207 C3		
Sealing	:	Inpro/Seal		Inpro/Seal		
Lubrication interval	:	20000 h		20000 h		
Lubricant amount	:	11 g		7 g		
Lubricant type	:	Mobil Polyrex EM				
Notes:						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	13/01/2024				1 / 2	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 13516376

LOAD PERFORMANCE CURVE

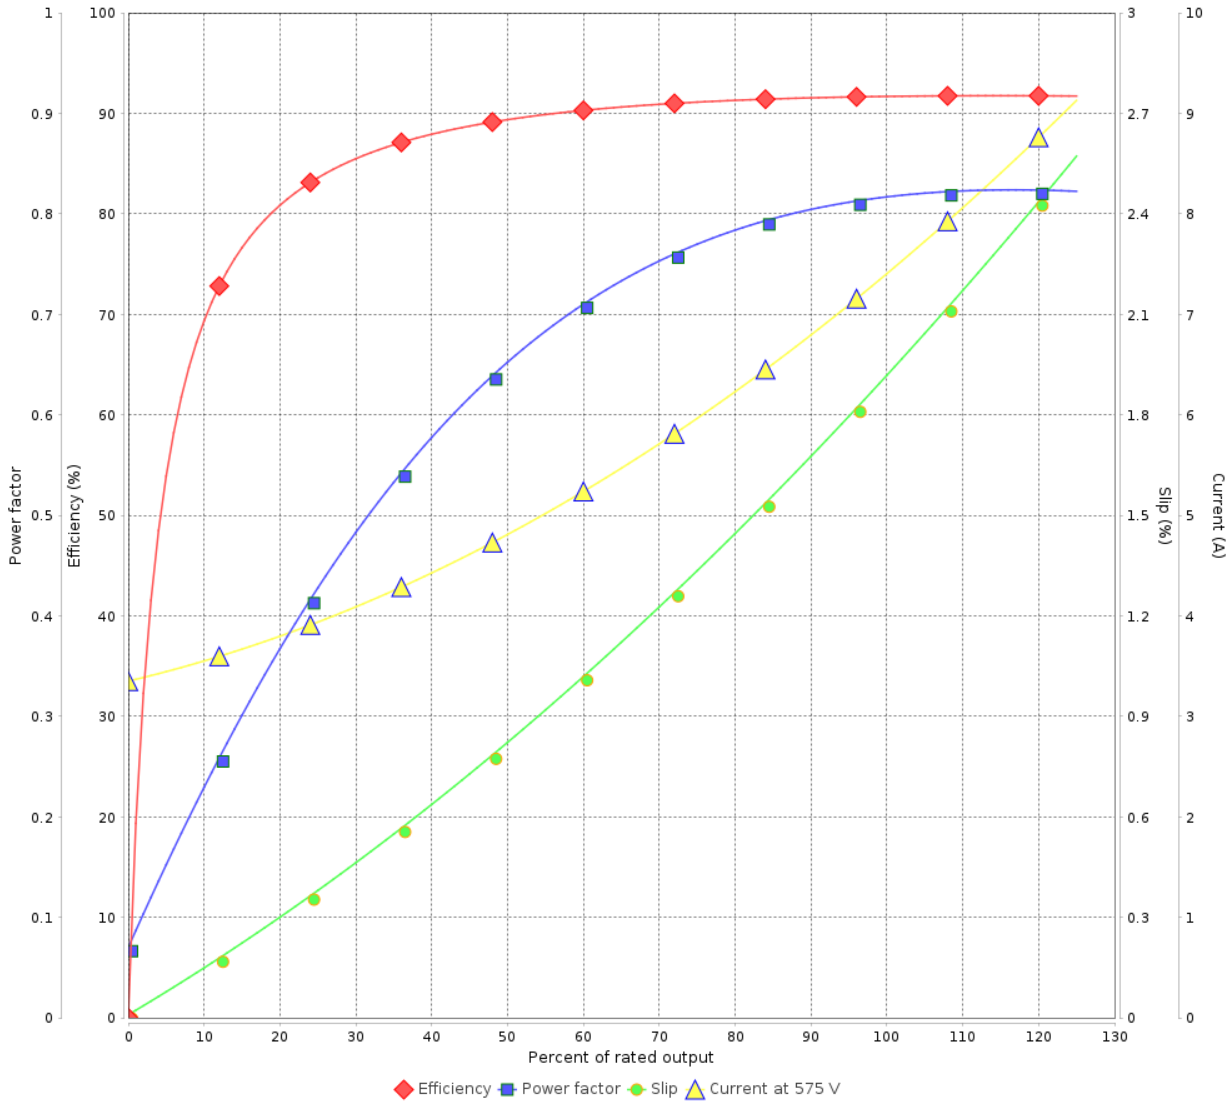

Performance : 575 V 60 Hz 4P

Rated current	: 7.34 A	Moment of inertia (J)	: 0.0566 kgm <sup>2</sup>
LRC	: 7.1	Duty cycle	: Cont.(S1)
Rated torque	: 3.08 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.25
Breakdown torque	: 310 %	Temperature rise	: 80 K
Rated speed	: 1765 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	13/01/2024			