DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: W22 IEEE 841 - Nema Premium Efficiency

Frame	: 213/5T	Locked rotor time	: 58 s (hot) 104 s (cold)
Output	: 3 HP (2.2 kW)	Temperature rise[4]	: 80 K
Poles	: 6	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l
Rated current	: 3.53 A	Protection degree	: IP56
L. R. Amperes	: 24.7 A	Cooling method	: IC411 - TEFC
LRC	: 7.0 Code K	Mounting	: B3R(D)
No load current	: 2.20 A	Rotation[1]	: Both
Rated speed	: 1175 rpm	Noise level[2]	: 55 dB(A)
Slip	: 2.08 %	Starting method	: Direct On Line
Rated torque	: 1.85 kgfm	Approx. weight[3]	: 55.0 kg
Locked rotor torque	: 200 %	Design	: B
Pull up torque	: 170 %		
Breakdown torque	: 280 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0504 kgm²		

Output	Start	50%	75%	100%
Efficiency (%)	-	86.5	88.5	89.5
Power Factor	0.34	0.50	0.63	0.7

	Load type	: -
	Load torque	: -
	Load inertia (J=GD²/4)	: -

	Drive end	Non drive end
Bearing type	6308-C3	6207-C3
Lubrication interval	20000 h	20000 h
Lubricant amount	11 g	7 g
Lubricant type	MOBIL POLYREX EM	

Foundation loads
Max. traction : 67 kgf
Max. compression : 122 kgf

Notes:

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
11.02	8.48	7.70	6.74	4.38	3.44	2.45

Standards

Specification	: MG1 - Part 10	Vibration	: IEEE841 - 6.9
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Performed	Checked	Date
				2026/11/12


Performed by				
Checked by			Page	Revision
Date	2026/11/12		1/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: W22 IEEE 841 - Nema Premium Efficiency

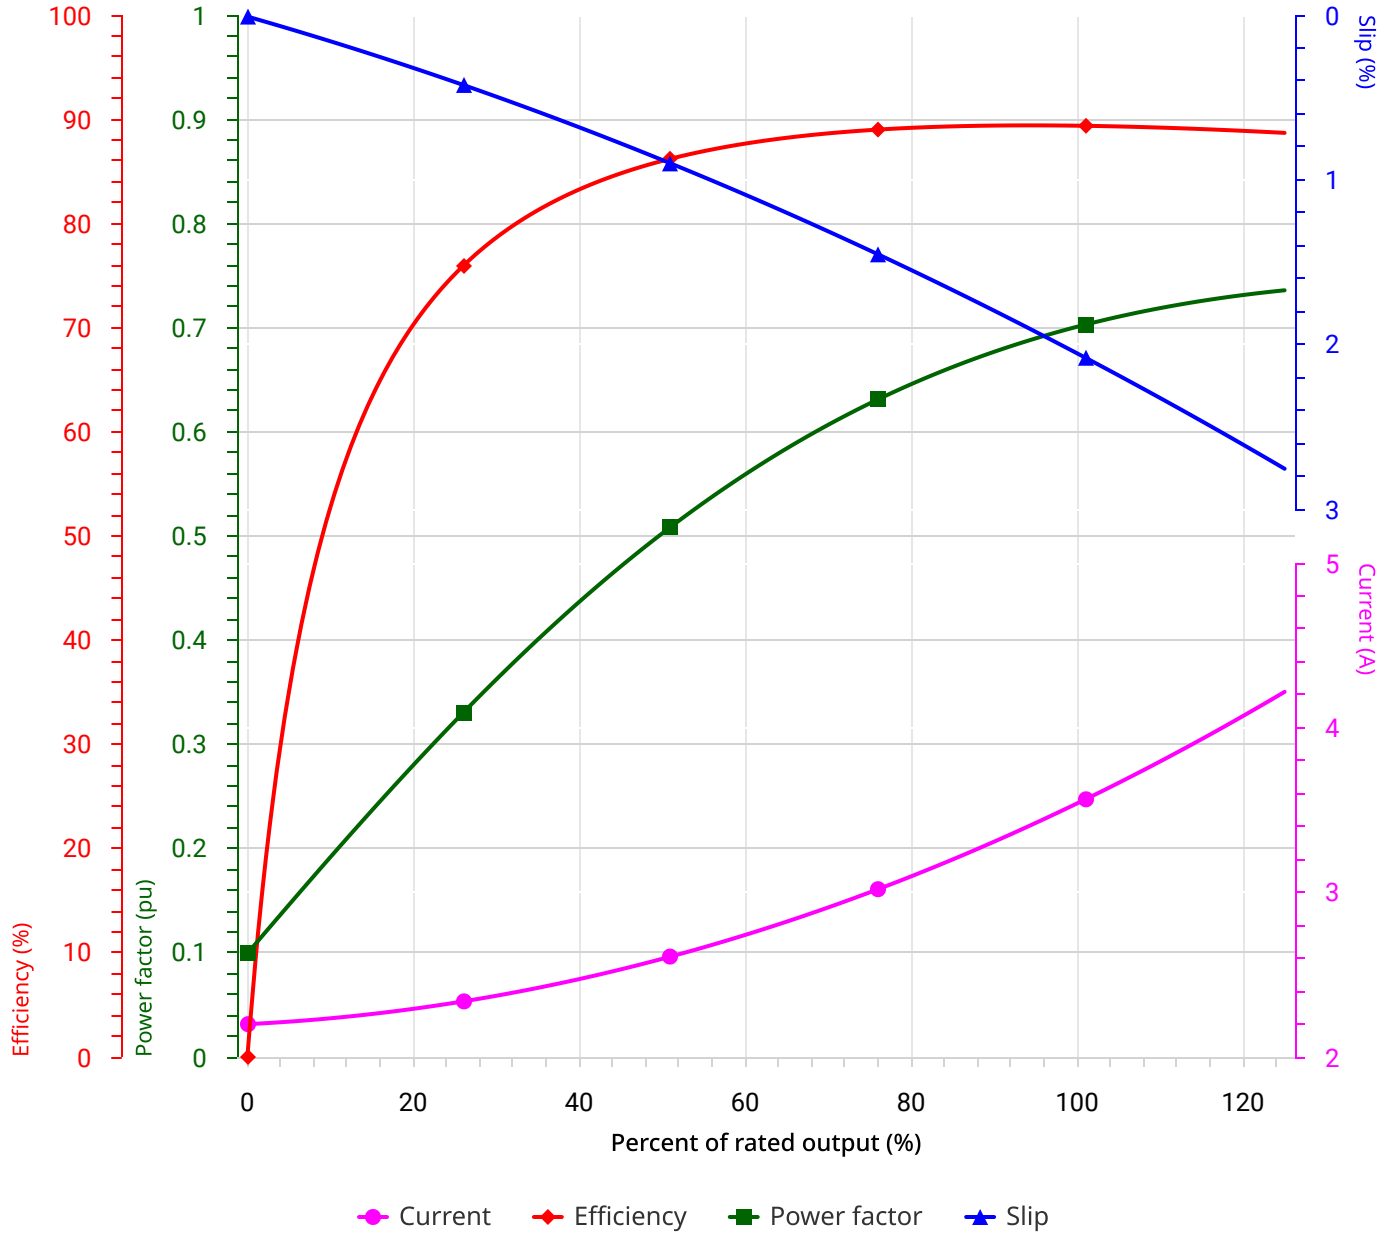

Performance	: 3 HP (2.2 kW) 575V 60Hz 6P 213/5T

Rated current	: 3.53 A	Moment of inertia (J)	: 0.0504 kgm²
LRC	: 7.0 Code K	Duty cycle	: Cont.(S1)
Rated torque	: 1.85 kgfm	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.25
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 1175 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
				2026/11/12

Performed by				
Checked by			Page	Revision
Date	2026/11/12		2/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.