

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer	:				
Product line	: Standard Efficiency Three-Phase	Product code :	13659522		
Frame	: 56	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 11.9 kg		
Protection degree	: IP55	Moment of inertia (J)	: 0.0045 kgm <sup>2</sup>		
Output [HP]	0.5				
Poles	6				
Frequency [Hz]	60				
Rated voltage [V]	575				
Rated current [A]	0.794				
L. R. Amperes [A]	4.29				
LRC [A]	5.4x(Code K)				
No load current [A]	0.618				
Rated speed [RPM]	1160				
Slip [%]	3.33				
Rated torque [kgfm]	0.313				
Locked rotor torque [%]	210				
Breakdown torque [%]	300				
Service factor	1.15				
Temperature rise	80 K				
Locked rotor time	39s (cold) 22s (hot)				
Noise level <sup>2</sup>	50.0 dB(A)				
Efficiency (%)	25%				
	50%	64.0			
	75%	70.0			
	100%	72.0			
Power Factor	25%				
	50%	0.44			
	75%	0.56			
	100%	0.65			
Bearing type	: Drive end	6203 ZZ	Non drive end	6202 ZZ	
Sealing	: V'Ring		V'Ring		
Lubrication interval	: -		-		
Lubricant amount	: -		-		
Lubricant type	: Mobil Polyrex EM				
Foundation loads	Max. traction : 24 kgf				
	Max. compression : 36 kgf				
Notes					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	17/05/2022			1 / 2	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase Product code : 13659522

LOAD PERFORMANCE CURVE

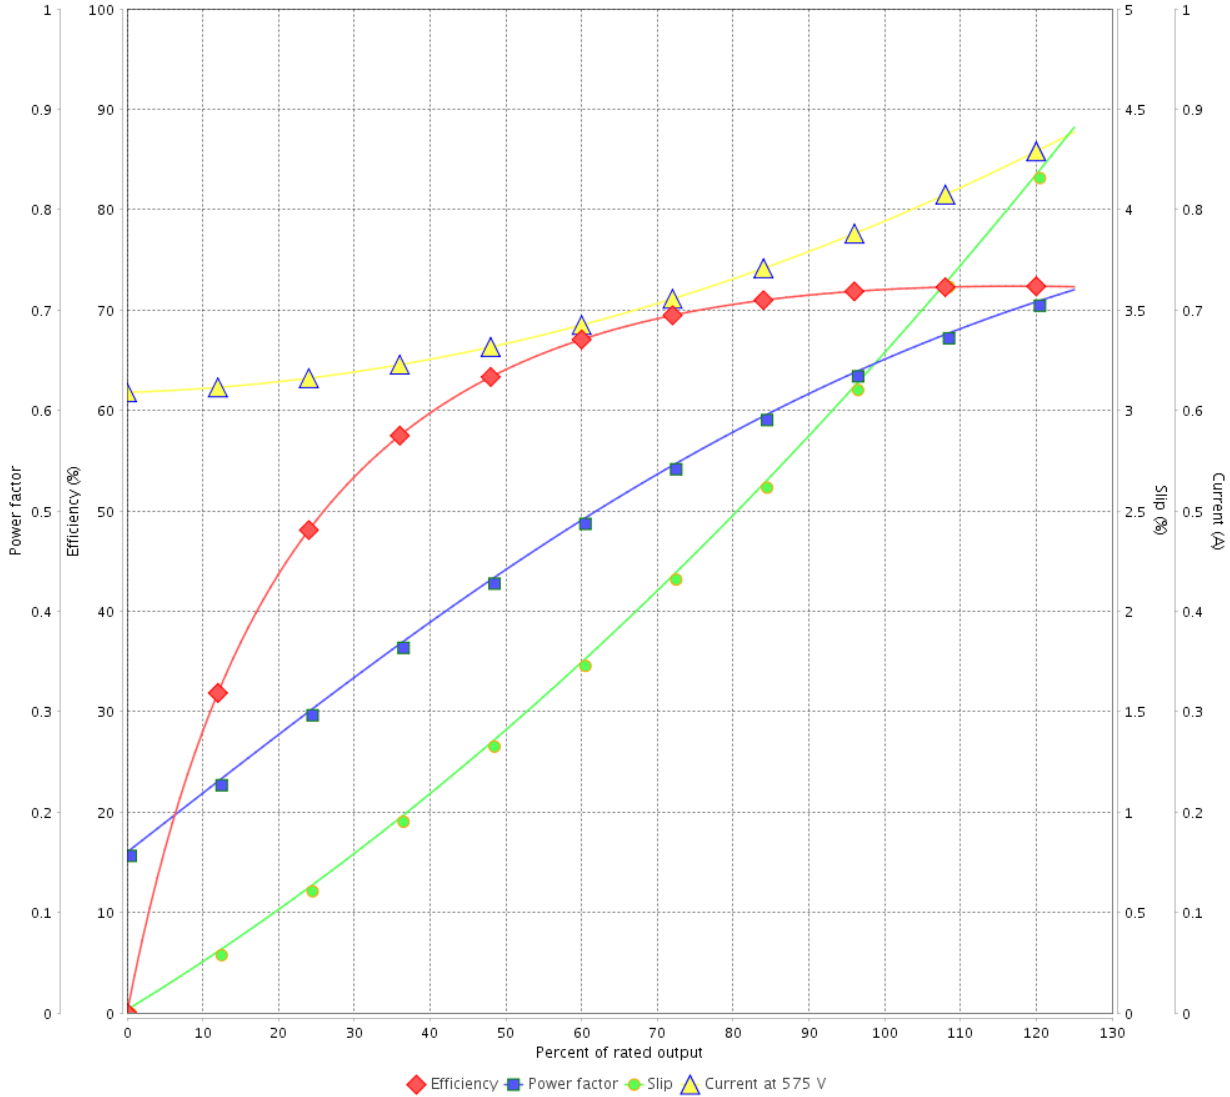

Performance : 575 V 60 Hz 6P

Rated current : 0.794 A  
 LRC : 5.4  
 Rated torque : 0.313 kgfm  
 Locked rotor torque : 210 %  
 Breakdown torque : 300 %  
 Rated speed : 1160 rpm

Moment of inertia (J) : 0.0045 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	17/05/2022			