

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line : Three-Phase		Product code : 13702729		
Frame : 56C	Insulation class : F	Cooling method : IC411 - TEFC	Mounting : F-1	
Duty cycle : Cont.(S1)	Ambient temperature : -20°C to +40°C	Rotation ¹ : Both (CW and CCW)	Starting method : Direct On Line	
Altitude : 1000 m.a.s.l.	Protection degree : IP55	Approx. weight ² : 12.8 kg	Moment of inertia (J) : 0.0036 kgm ²	
Output [HP]	0.75	0.75	0.75	
Poles	4	4	4	
Frequency [Hz]	60	50	50	
Rated voltage [V]	208-230/460	190/380	220/415	
Rated current [A]	2.63-2.38/1.19	2.64/1.32	2.47/1.31	
L. R. Amperes [A]	20.3-18.3/9.16	16.1/8.05	16.8/8.91	
LRC [A]	7.7x(Code L)	6.1x(Code H)	6.8x(Code K)	
No load current [A]	1.42-1.64/0.822	1.62/0.809	1.79/0.950	
Rated speed [RPM]	1760	1450	1460	
Slip [%]	2.22	3.33	2.67	
Rated torque [kgfm]	0.309	0.375	0.373	
Locked rotor torque [%]	240	180	220	
Breakdown torque [%]	360	250	310	
Service factor		1.15	1.15	
Temperature rise	80 K	80 K	80 K	
Locked rotor time	28s (cold) 16s (hot)	27s (cold) 15s (hot)	23s (cold) 13s (hot)	
Noise level ²	52.0 dB(A)	49.0 dB(A)	49.0 dB(A)	
Efficiency (%)	25%			
	50%	75.5	77.9	75.1
	75%	80.0	80.3	79.2
	100%	81.5	80.0	80.2
Power Factor	25%			
	50%	0.49	0.56	0.49
	75%	0.62	0.70	0.63
	100%	0.71	0.79	0.73
Bearing type	: Drive end 6203 ZZ	Non drive end 6202 ZZ	Foundation loads	
Sealing	: V'Ring	V'Ring	Max. traction	: 30 kgf
Lubrication interval	: -	-	Max. compression	: 43 kgf
Lubricant amount	: -	-		
Lubricant type	: Mobil Polyrex EM			
Notes USABLE @208V SF 1.00				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked
Performed by				
Checked by				
Date	13/05/2022		Page	Revision
			1 / 4	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : Three-Phase

Product code : 13702729

LOAD PERFORMANCE CURVE

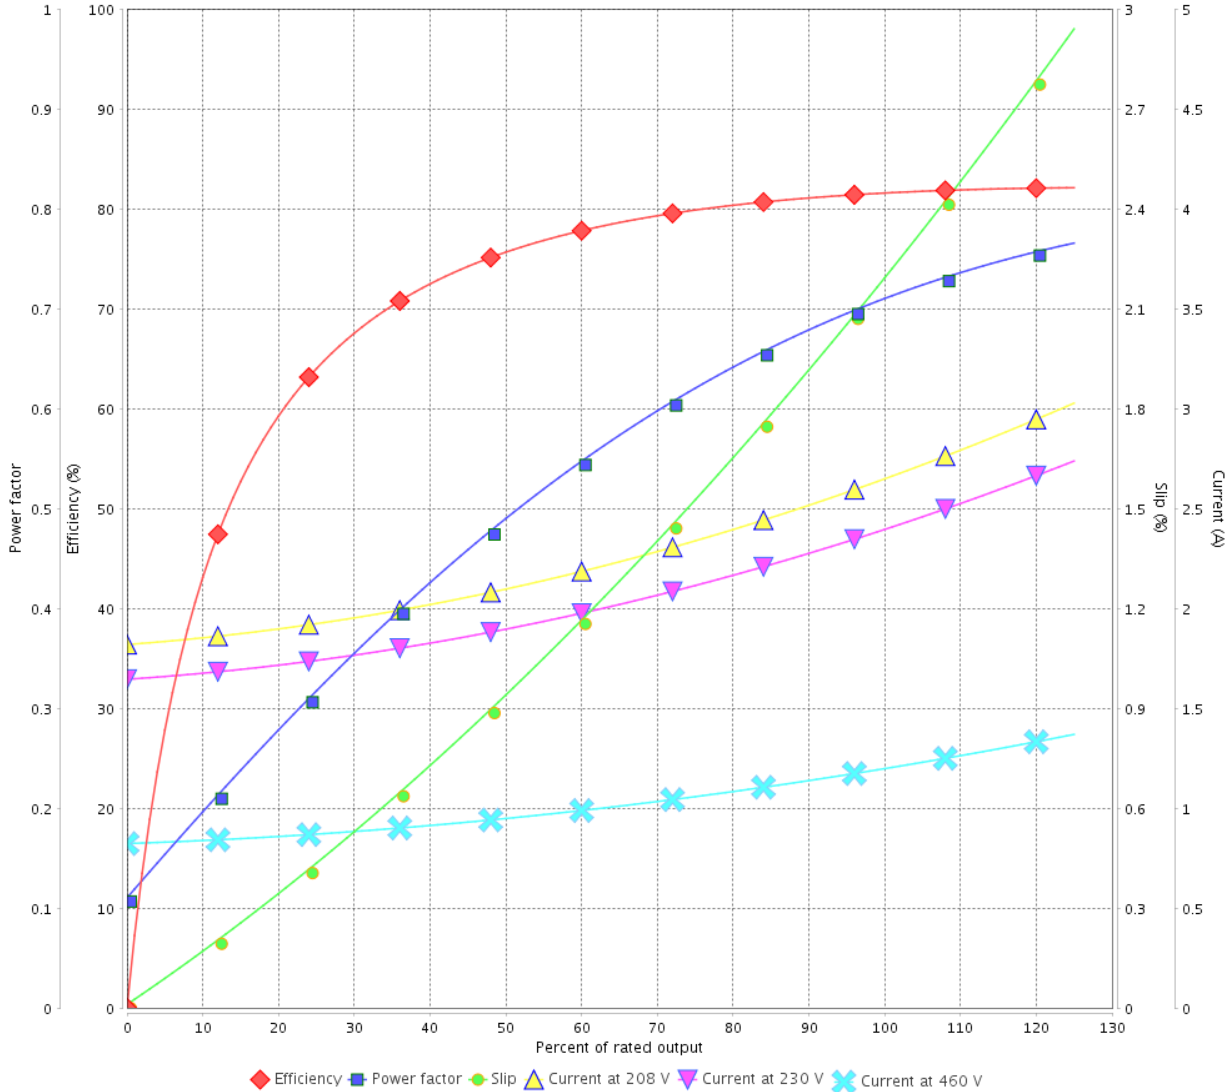

Performance : 208-230/460 V 60 Hz 4P

Rated current : 2.63-2.38/1.19 A
 LRC : 7.7
 Rated torque : 0.309 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 360 %
 Rated speed : 1760 rpm

Moment of inertia (J) : 0.0036 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 4	Revision
Checked by				
Date	13/05/2022			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Three-Phase

Product code : 13702729

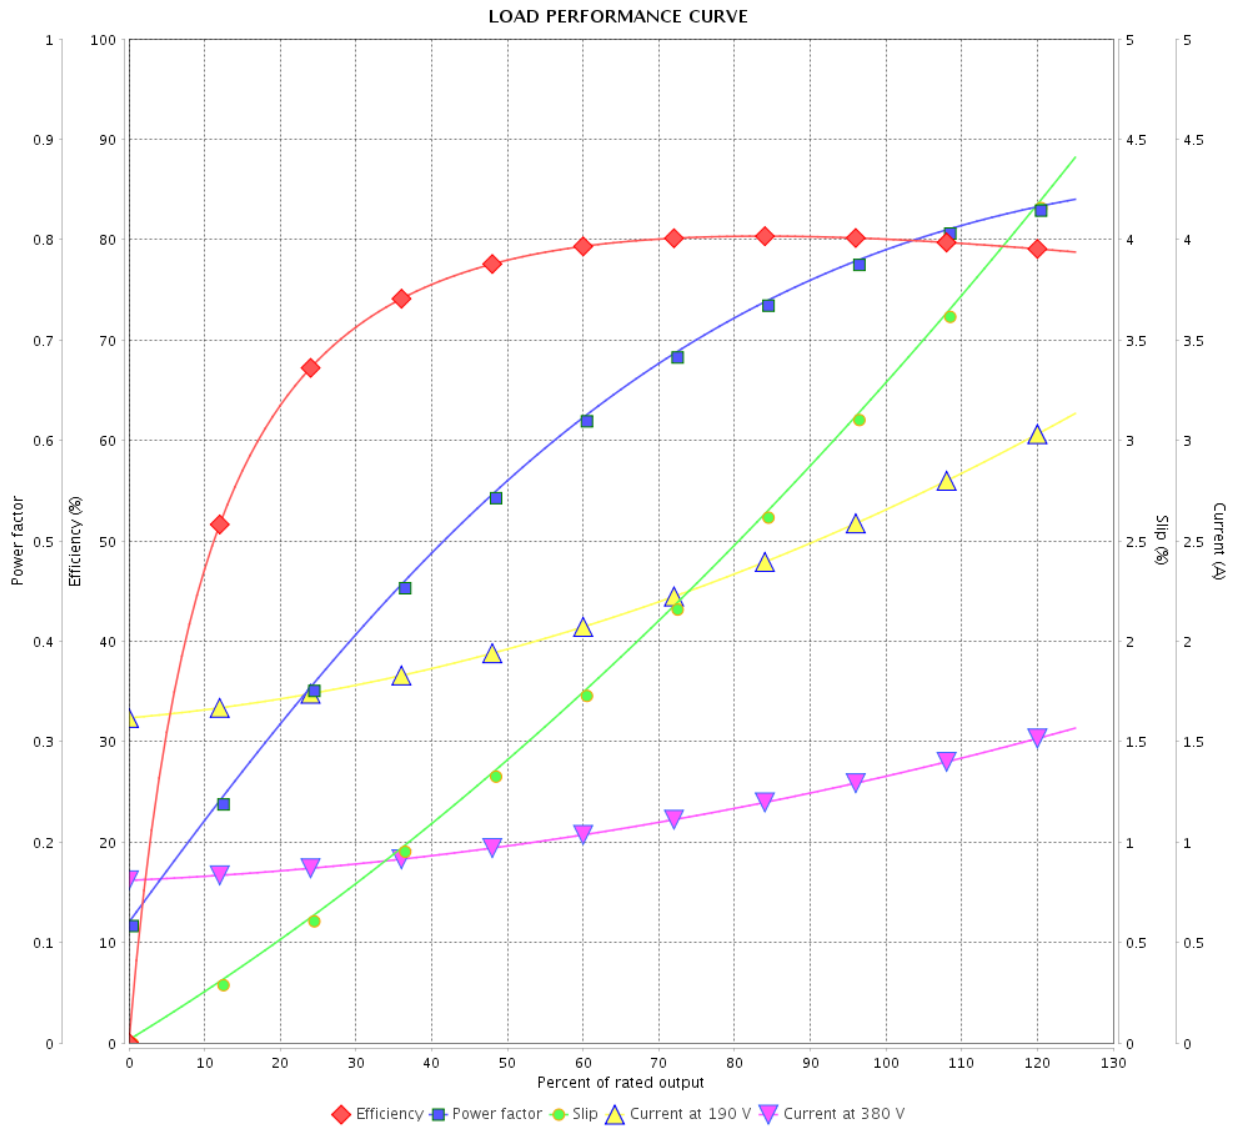

Performance : 190/380 V 50 Hz 4P

Rated current : 2.64/1.32 A
 LRC : 6.1
 Rated torque : 0.375 kgfm
 Locked rotor torque : 180 %
 Breakdown torque : 250 %
 Rated speed : 1450 rpm

Moment of inertia (J) : 0.0036 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Three-Phase

Product code : 13702729

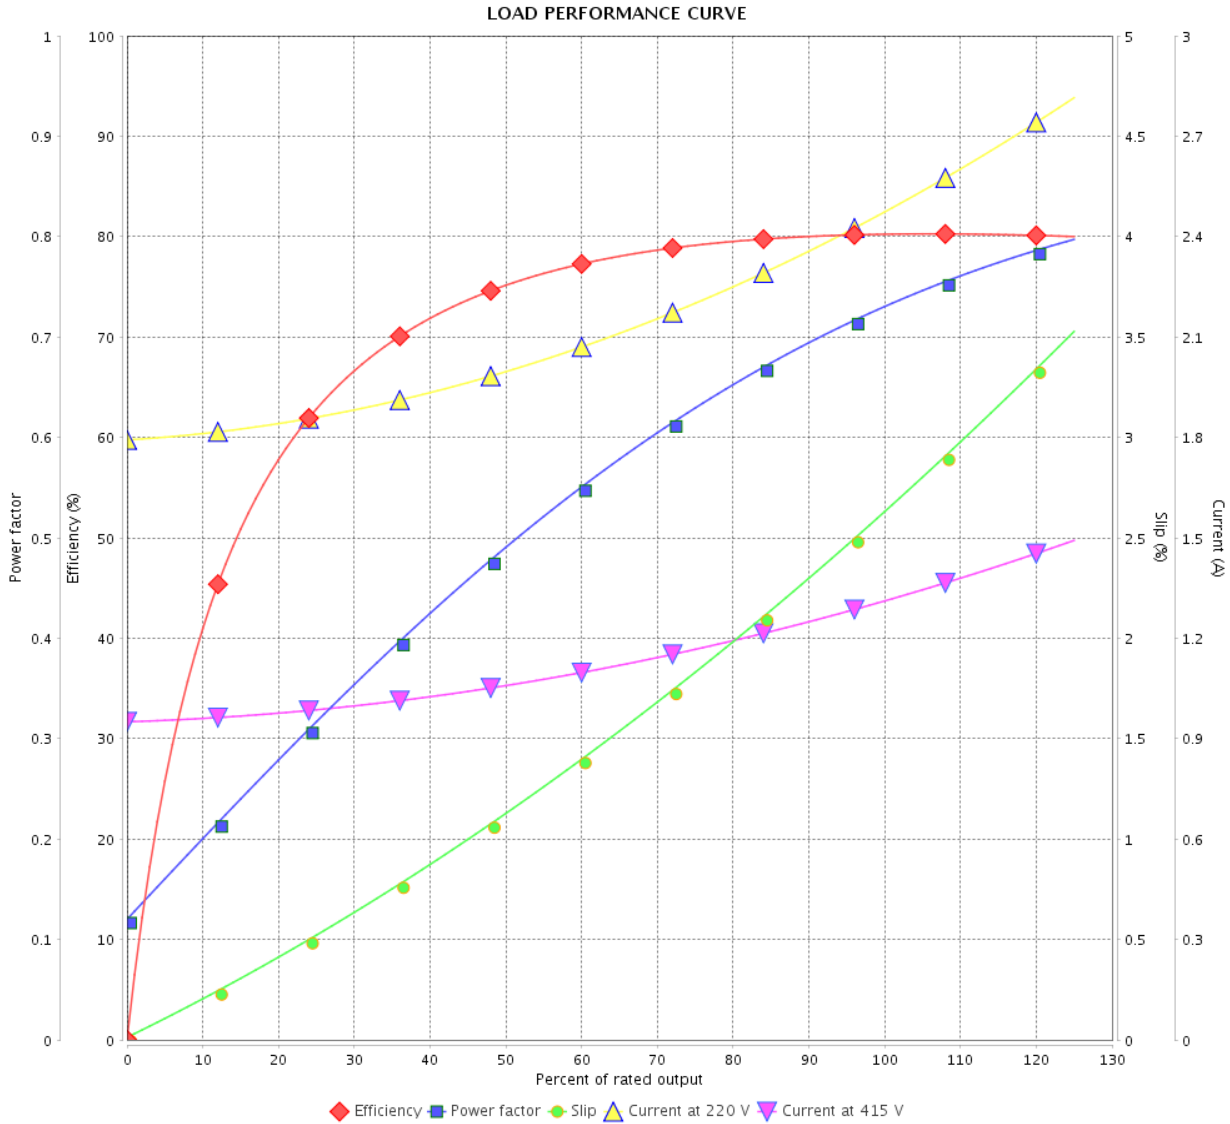

Performance : 220/415 V 50 Hz 4P

Rated current : 2.47/1.31 A
 LRC : 6.8
 Rated torque : 0.373 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 310 %
 Rated speed : 1460 rpm

Moment of inertia (J) : 0.0036 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 4	Revision
Checked by				
Date	13/05/2022			