

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line	: Three-Phase	Product code :	13709217	
Frame	: 56H	Cooling method	: IC411 - TEFC	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 19.0 kg	
Protection degree	: IP55	Moment of inertia (J)	: 0.0055 kgm ²	
Design	: B			
Output [HP]	2			
Poles	4			
Frequency [Hz]	60			
Rated voltage [V]	575			
Rated current [A]	2.18			
L. R. Amperes [A]	17.8			
LRC [A]	8.2x(Code K)			
No load current [A]	1.12			
Rated speed [RPM]	1745			
Slip [%]	3.06			
Rated torque [kgfm]	0.832			
Locked rotor torque [%]	270			
Breakdown torque [%]	300			
Service factor	1.15			
Temperature rise	80 K			
Locked rotor time	27s (cold) 15s (hot)			
Noise level ²	52.0 dB(A)			
Efficiency (%)	25%			
	50%	85.5		
	75%	87.5		
	100%	86.5		
Power Factor	25%			
	50%	0.60		
	75%	0.73		
	100%	0.80		
Bearing type	: Drive end : 6204 ZZ	Non drive end : 6202 ZZ	Foundation loads	
Sealing	: V'Ring	V'Ring	Max. traction : 71 kgf	
Lubrication interval	: -	-	Max. compression : 90 kgf	
Lubricant amount	: -	-		
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	11/05/2022		1 / 2	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : Three-Phase

Product code : 13709217

LOAD PERFORMANCE CURVE

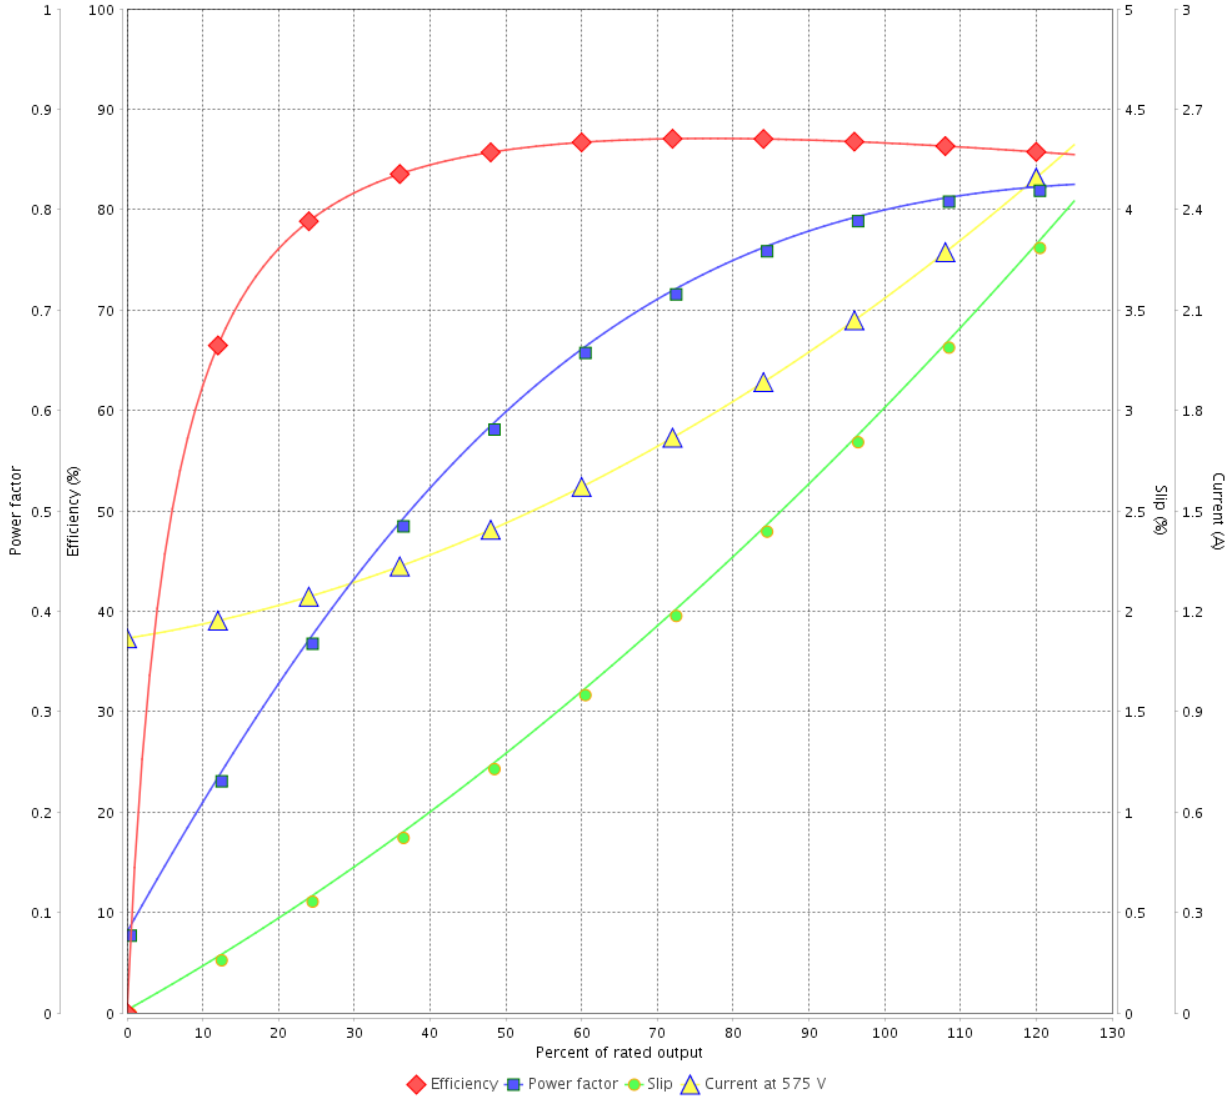

Performance : 575 V 60 Hz 4P

Rated current : 2.18 A	Moment of inertia (J) : 0.0055 kgm ²
LRC : 8.2	Duty cycle : Cont.(S1)
Rated torque : 0.832 kgfm	Insulation class : F
Locked rotor torque : 270 %	Service factor : 1.15
Breakdown torque : 300 %	Temperature rise : 80 K
Rated speed : 1745 rpm	Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	11/05/2022			