

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :	
Product line	: Jet Pump - J type Three-Phase
Product code :	13721904
Frame	: 56J
Insulation class	: F
Duty cycle	: Cont.(S1)
Ambient temperature	: -20°C to +40°C
Altitude	: 1000 m.a.s.l.
Protection degree	: IP55
Design	: B
Cooling method	: IC411 - TEFC
Mounting	: W-6
Rotation ¹	: CCW
Starting method	: Direct On Line
Approx. weight ²	: 15.4 kg
Moment of inertia (J)	: 0.0043 kgm ²
Output [HP]	1.5
Poles	2
Frequency [Hz]	60
Rated voltage [V]	230/460
Rated current [A]	3.74/1.87
L. R. Amperes [A]	34.0/17.0
LRC [A]	9.1x(Code L)
No load current [A]	1.72/0.859
Rated speed [RPM]	3520
Slip [%]	2.22
Rated torque [kgfm]	0.309
Locked rotor torque [%]	229
Breakdown torque [%]	300
Service factor	1.15
Temperature rise	80 K
Locked rotor time	30s (cold) 17s (hot)
Noise level ²	68.0 dB(A)
Efficiency (%)	25%
	50%
	75%
	100%
Power Factor	25%
	50%
	75%
	100%
Bearing type	: Drive end 6203 2RS Non drive end 6202 2RS
Sealing	: V'Ring V'Ring
Lubrication interval	: - -
Lubricant amount	: - -
Lubricant type	: Mobil Polyrex EM
Foundation loads	Max. traction : 32 kgf
	Max. compression : 47 kgf
Notes USABLE @208V 4.13A SF 1.00 SFA 4.13A	
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.	
These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary
Performed by	Performed
Checked by	Checked
Date	16/05/2022
Page	1 / 4
Revision	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - J type Three-Phase Product code : 13721904

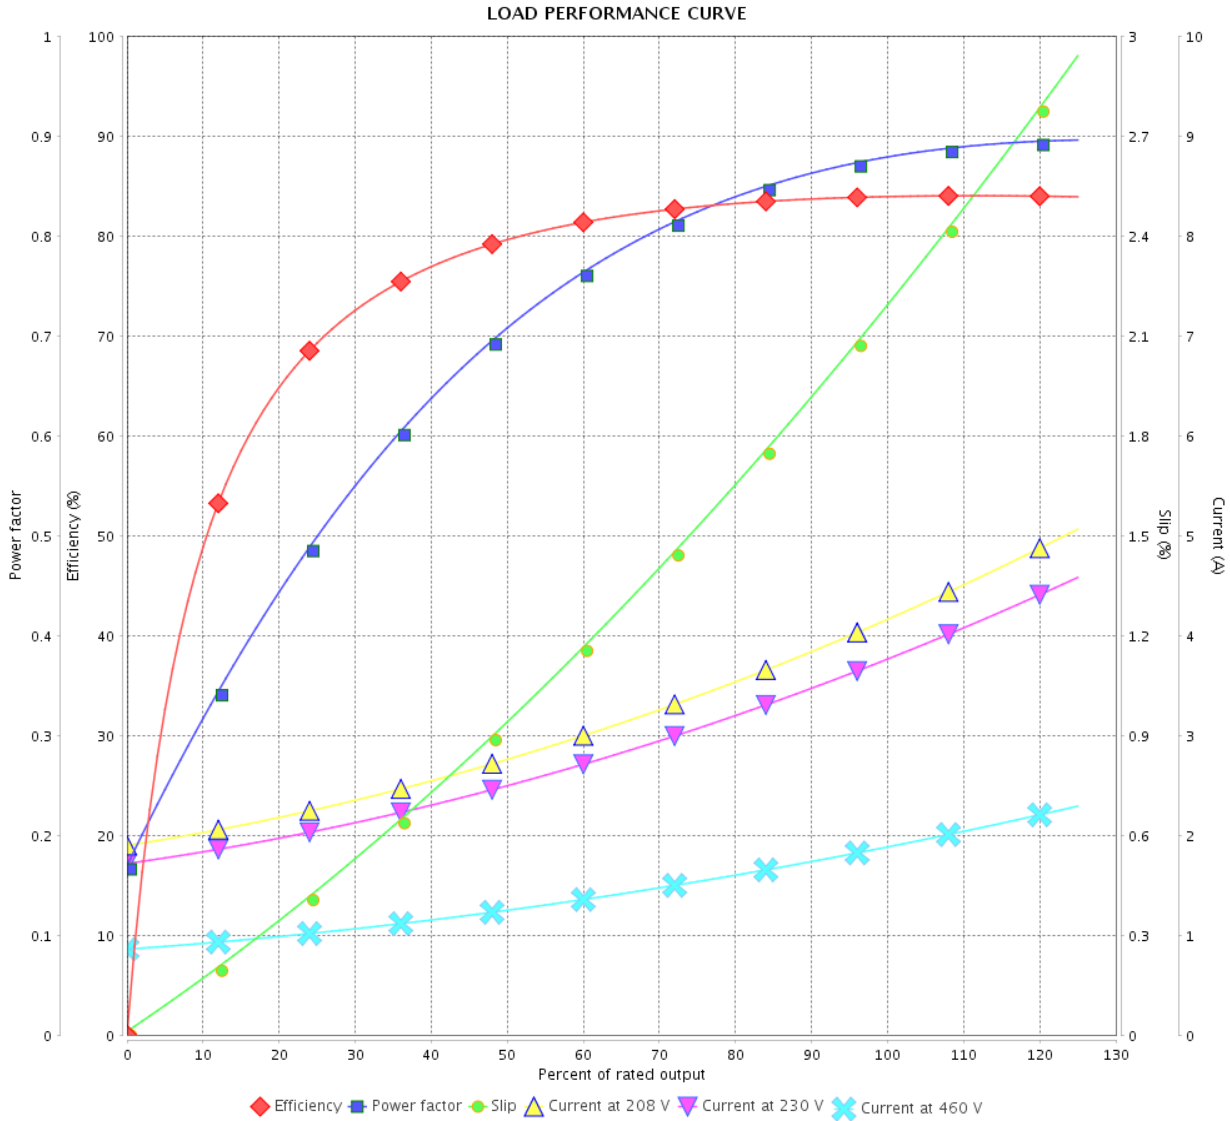

Performance : 230/460 V 60 Hz 2P

Rated current : 3.74/1.87 A
 LRC : 9.1
 Rated torque : 0.309 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 300 %
 Rated speed : 3520 rpm

Moment of inertia (J) : 0.0043 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 4	Revision
Checked by				
Date	16/05/2022			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - J type Three-Phase Product code : 13721904

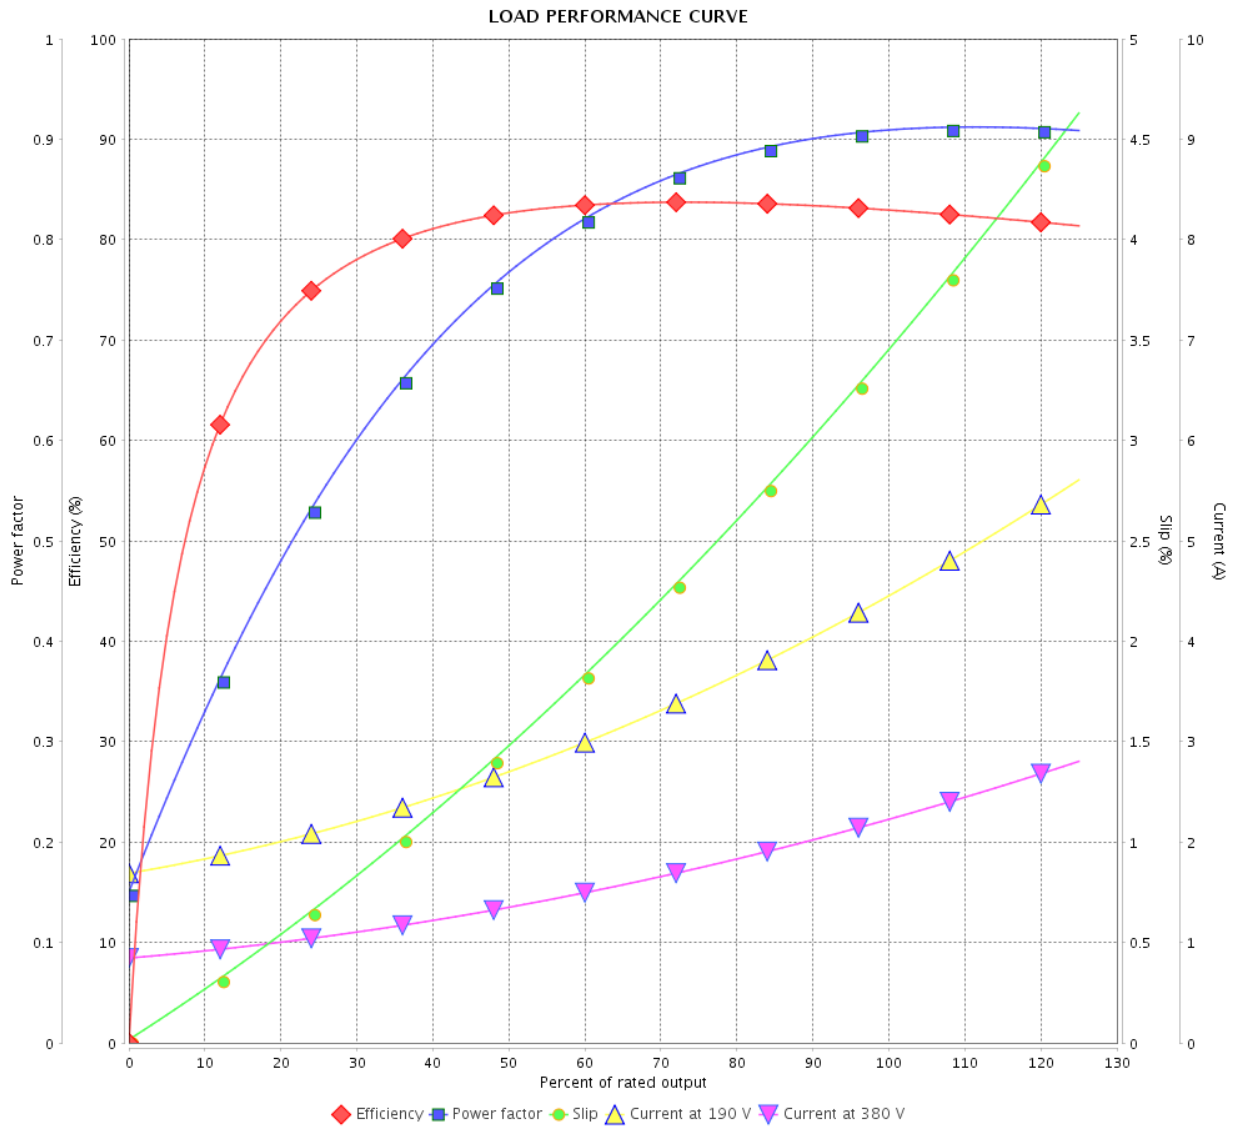

Performance : 190/380 V 50 Hz 2P

Rated current : 4.44/2.22 A
 LRC : 7.2
 Rated torque : 0.376 kgfm
 Locked rotor torque : 190 %
 Breakdown torque : 280 %
 Rated speed : 2895 rpm

Moment of inertia (J) : 0.0043 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - J type Three-Phase Product code : 13721904

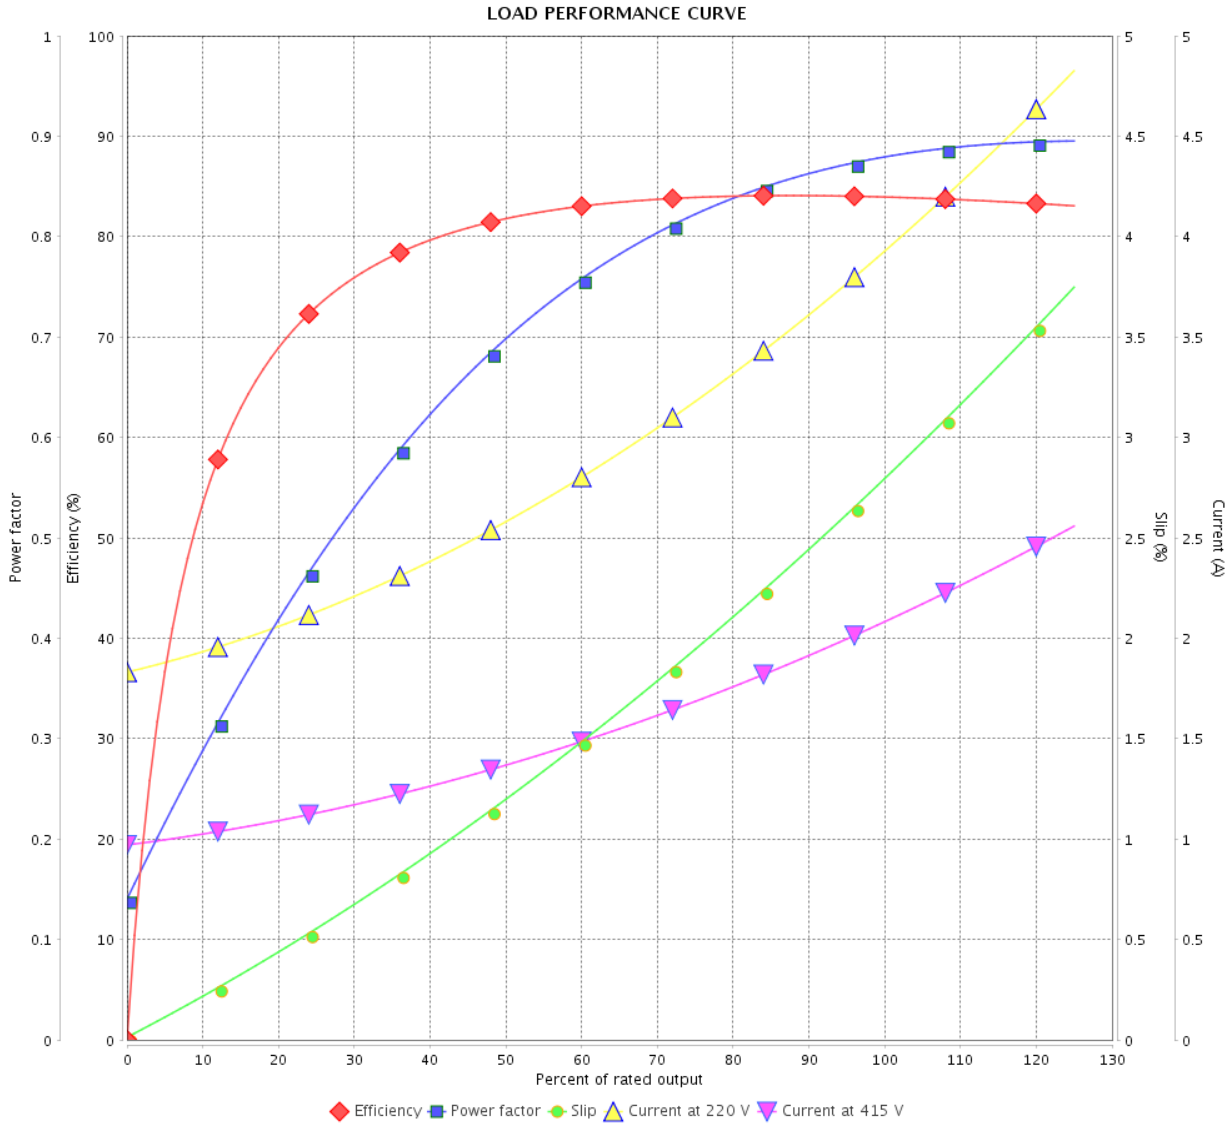

Performance : 220/415 V 50 Hz 2P

Rated current : 3.90/2.07 A
 LRC : 8.5
 Rated torque : 0.373 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 330 %
 Rated speed : 2915 rpm

Moment of inertia (J) : 0.0043 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 4	Revision
Checked by				
Date	16/05/2022			