

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line : Three-Phase	Product code : 13728659			
Frame : W56 Insulation class : F Duty cycle : Cont.(S1) Ambient temperature : -20°C to +40°C Altitude : 1000 m.a.s.l. Protection degree : IP55	Cooling method : IC411 - TEFC Mounting : F-1 Rotation <sup>1</sup> : Both (CW and CCW) Starting method : Direct On Line Approx. weight <sup>2</sup> : 8.8 kg Moment of inertia (J) : 0.0009 kgm <sup>2</sup>			
Output [HP]	0.75	0.75	0.75	
Poles	2	2	2	
Frequency [Hz]	60	50	50	
Rated voltage [V]	208-230/460	190/380	220/415	
Rated current [A]	2.48-2.24/1.12	2.60/1.30	2.34/1.24	
L. R. Amperes [A]	20.1-18.1/9.07	15.6/7.80	16.4/8.68	
LRC [A]	8.1x(Code L)	6.0x(Code H)	7.0x(Code K)	
No load current [A]	1.07-1.24/0.622	1.22/0.609	1.37/0.727	
Rated speed [RPM]	3440	2770	2810	
Slip [%]	4.44	7.67	6.33	
Rated torque [kgfm]	0.158	0.196	0.194	
Locked rotor torque [%]	350	260	310	
Breakdown torque [%]	360	240	290	
Service factor		1.15	1.15	
Temperature rise	80 K	80 K	80 K	
Locked rotor time	28s (cold) 16s (hot)	28s (cold) 16s (hot)	21s (cold) 12s (hot)	
Noise level <sup>2</sup>	65.0 dB(A)	64.0 dB(A)	64.0 dB(A)	
Efficiency (%)	25%			
	50%	70.0	73.1	
	75%	75.5	76.8	
	100%	77.0	77.2	
Power Factor	25%			
	50%	0.62	0.61	
	75%	0.74	0.74	
	100%	0.80	0.80	
Bearing type	: Drive end 6203 ZZ Non drive end 6202 ZZ	Foundation loads		
Sealing	: V'Ring V'Ring	Max. traction	: 13 kgf	
Lubrication interval	: - -	Max. compression	: 22 kgf	
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes USABLE @208V SF 1.00				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	11/05/2022		1 / 4	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Three-Phase

Product code : 13728659

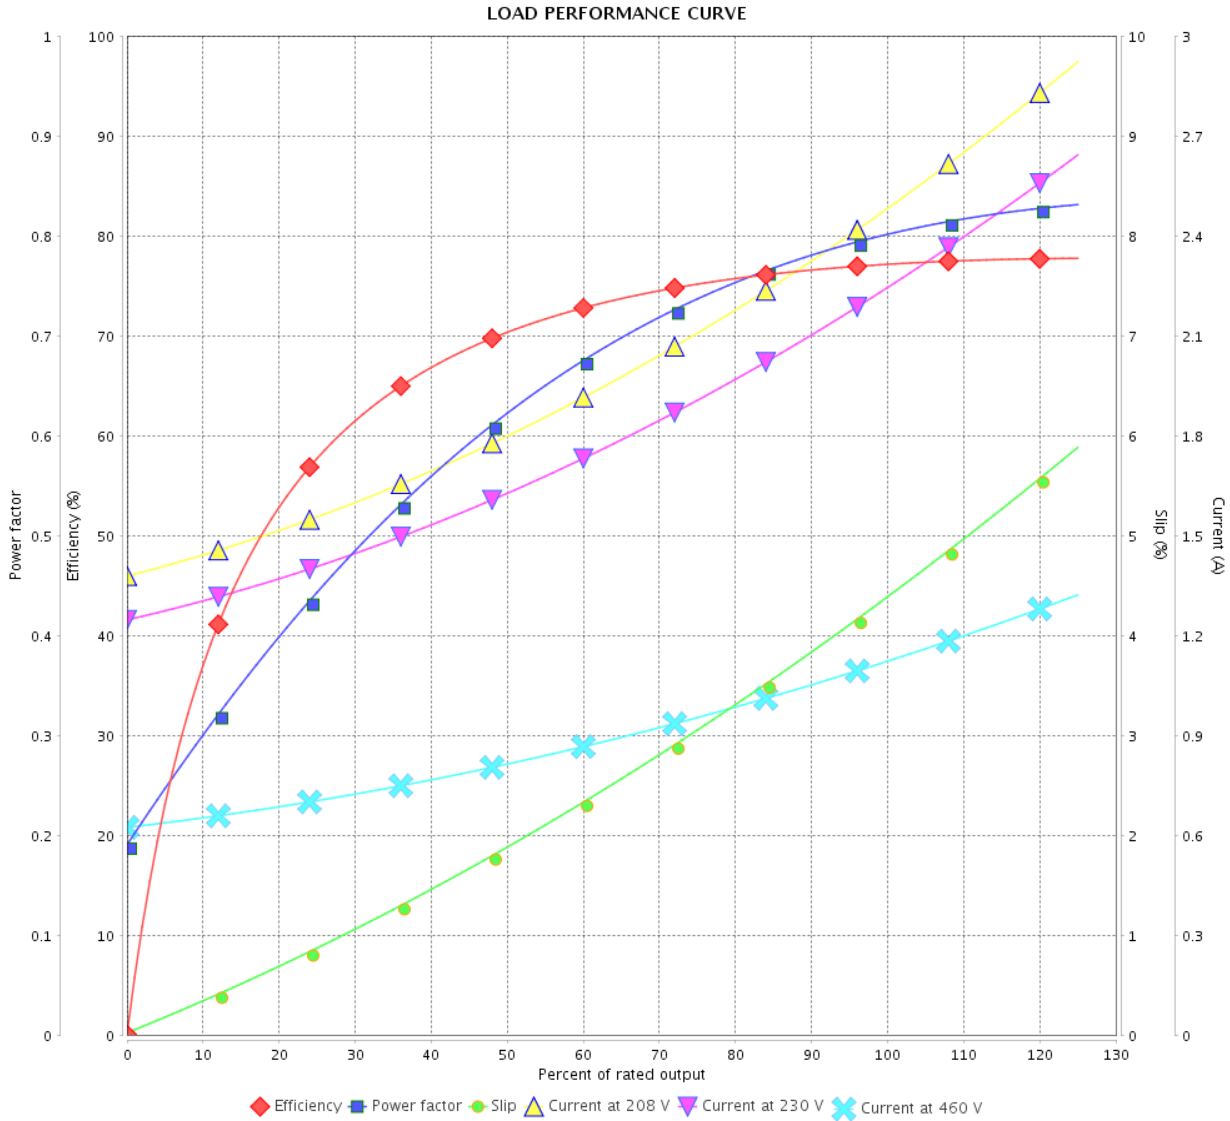

Performance : 208-230/460 V 60 Hz 2P

Rated current : 2.48-2.24/1.12 A  
 LRC : 8.1  
 Rated torque : 0.158 kgfm  
 Locked rotor torque : 350 %  
 Breakdown torque : 360 %  
 Rated speed : 3440 rpm

Moment of inertia (J) : 0.0009 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor :  
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : Three-Phase

Product code : 13728659

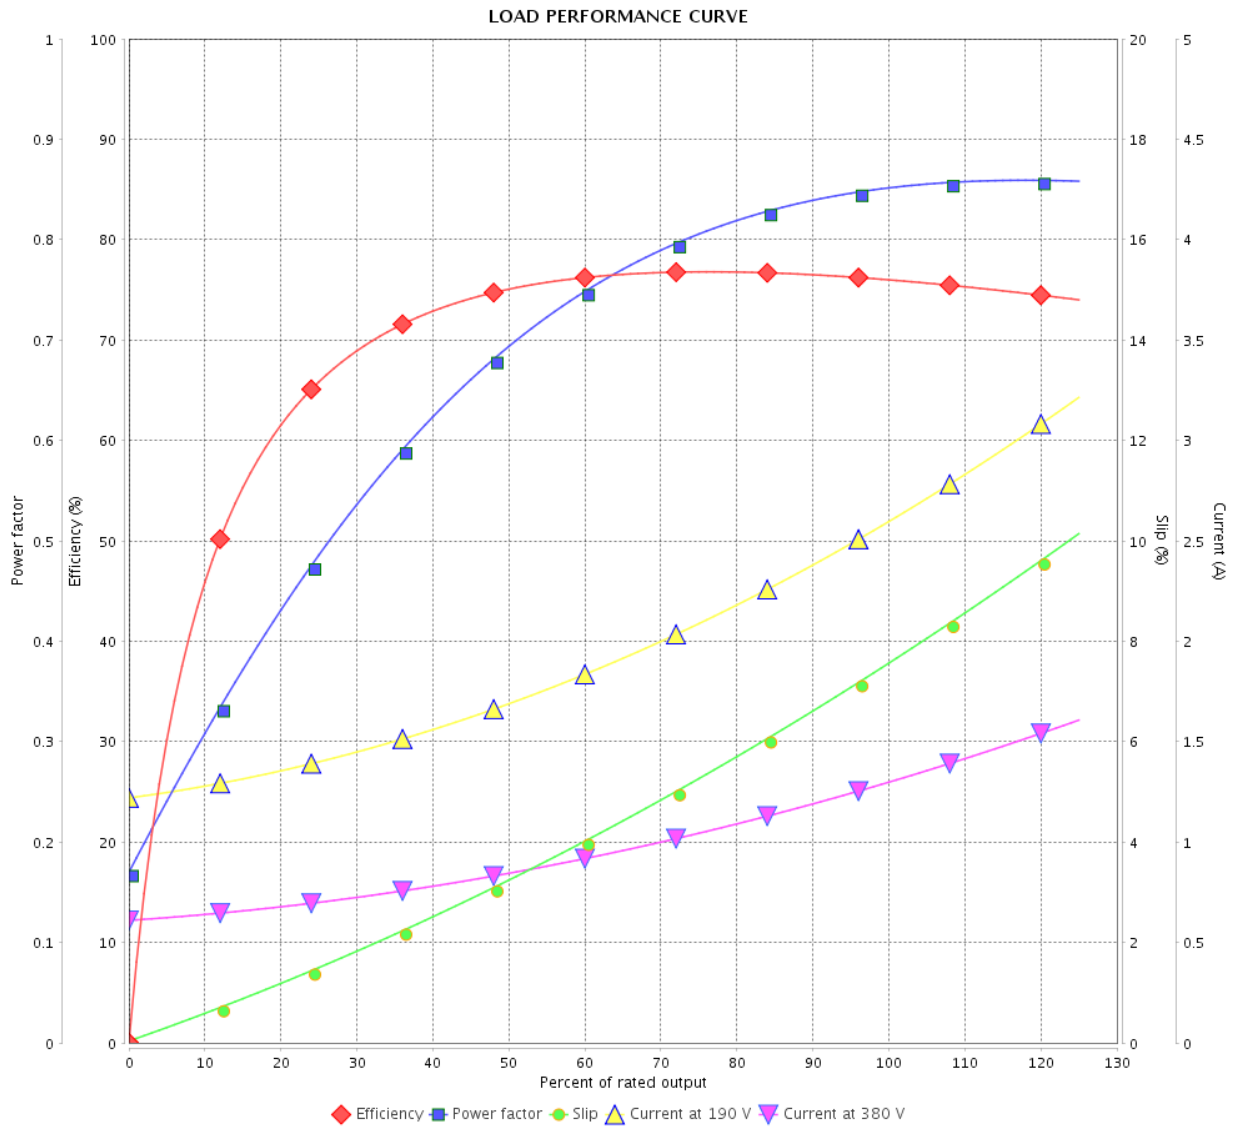

Performance : 190/380 V 50 Hz 2P

Rated current : 2.60/1.30 A  
 LRC : 6.0  
 Rated torque : 0.196 kgfm  
 Locked rotor torque : 260 %  
 Breakdown torque : 240 %  
 Rated speed : 2770 rpm

Moment of inertia (J) : 0.0009 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				
			3 / 4	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Three-Phase

Product code : 13728659

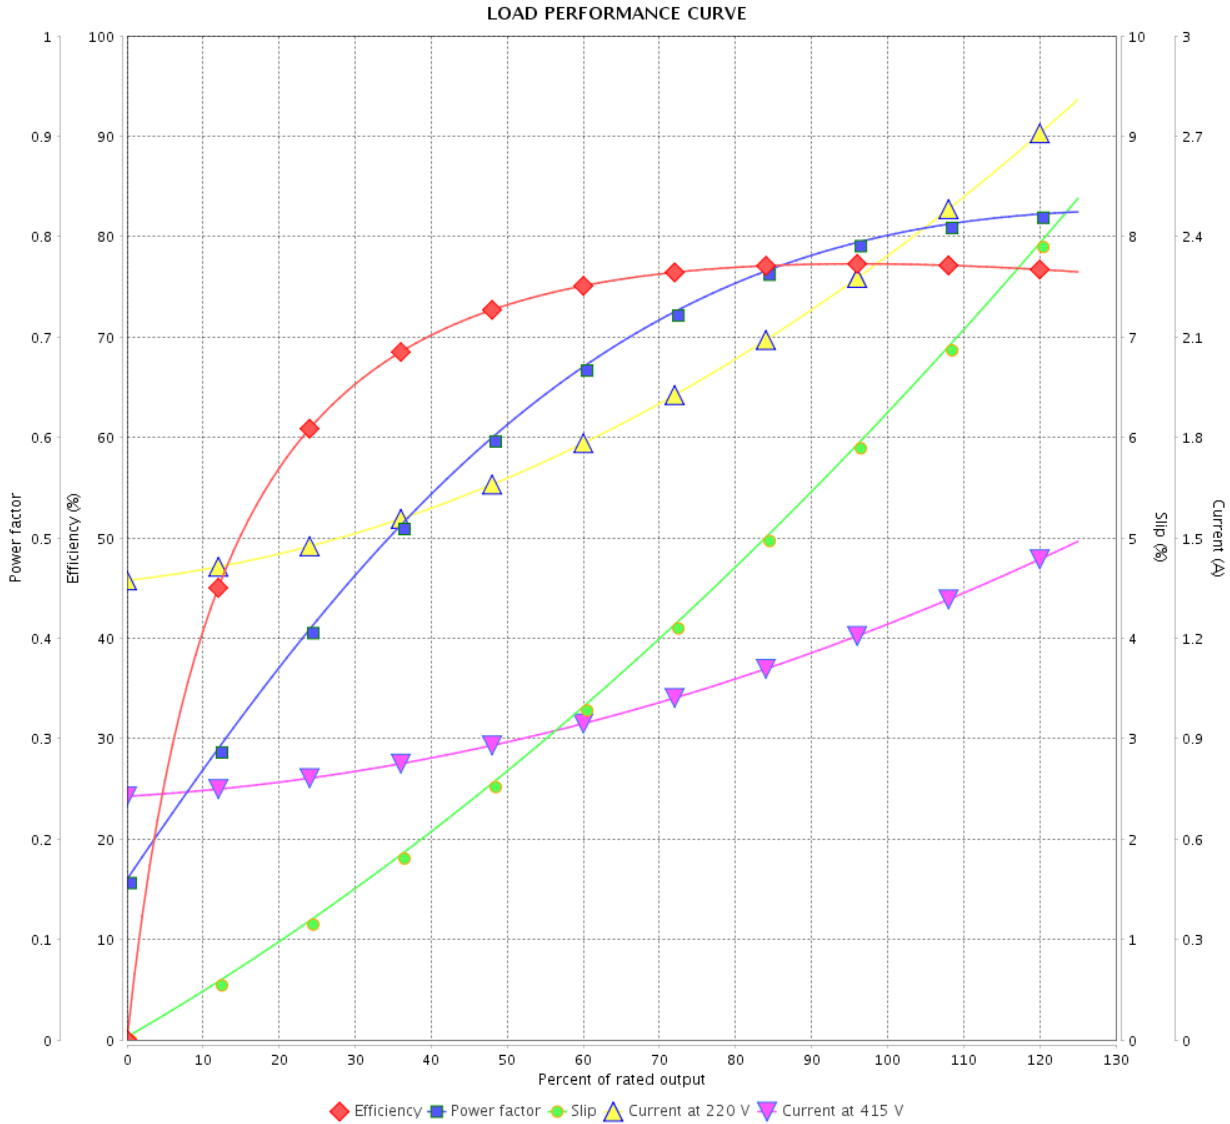

Performance : 220/415 V 50 Hz 2P

Rated current : 2.34/1.24 A  
 LRC : 7.0  
 Rated torque : 0.194 kgfm  
 Locked rotor torque : 310 %  
 Breakdown torque : 290 %  
 Rated speed : 2810 rpm

Moment of inertia (J) : 0.0009 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 4	Revision
Checked by				
Date	11/05/2022			