DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 IEEE 841 - Nema Premium Efficiency
Product code : 13763562

Frame	: 213/5T
Output	: 5 HP (3.7 kW)
Poles	: 6
Frequency	: 60 Hz
Rated voltage	: 200 V
Rated current	: 15.7 A
L. R. Amperes	: 107 A
LRC	: 6.8 Code J
No load current	: 7.94 A
Rated speed	: 1170 rpm
Slip	: 2.50 %
Rated torque	: 3.10 kgfm
Locked rotor torque	: 170 %
Pull up torque	: 145 %
Breakdown torque	: 260 %
Insulation class	: F
Service factor	: 1.25
Moment of inertia (J)	: 0.062 kgm²

Locked rotor time	: 57 s (hot) 0 s (cold)
Temperature rise[4]	: 80 K
Duty cycle	: S1
Ambient temperature	: -20 °C to +40 °C
Altitude	: 1000 m.a.s.l
Protection degree	: IP55
Cooling method	: IC411 - TEFC
Mounting	: B3R(D)
Rotation[1]	: Both
Noise level[2]	: 55 dB(A)
Starting method	: Direct On Line
Approx. weight[3]	: 82.0 kg
Design	: B

Output	Start	50%	75%	100%
Efficiency (%)	-	88.5	89.5	89.5
Power Factor	0.00	0.58	0.70	0.76

Load type	: -
Load torque	: -
Load inertia (J=GD²/4)	: -

	Drive end	Non drive end
Bearing type	6308-C3	6207-C3
Lubrication interval	20000 h	20000 h
Lubricant amount	11 g	7 g
Lubricant type	MOBIL POLYREX EM	

Foundation loads
Max. traction : 106 kgf
Max. compression : 188 kgf

Notes:

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
0.00	0.00	0.00	0.00	0.00	0.00	0.00

Standards

Specification	: MG1 - Part 10	Vibration	: IEEE841 - 6.9
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Performed	Checked	Date
				30/09/2016


Performed by	yasmim	189452/2016	
Checked by	lais	Page	Revision
Date	30/09/2016	1/2	1

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: W22 IEEE 841 - Nema Premium Efficiency
Product code	: 13763562

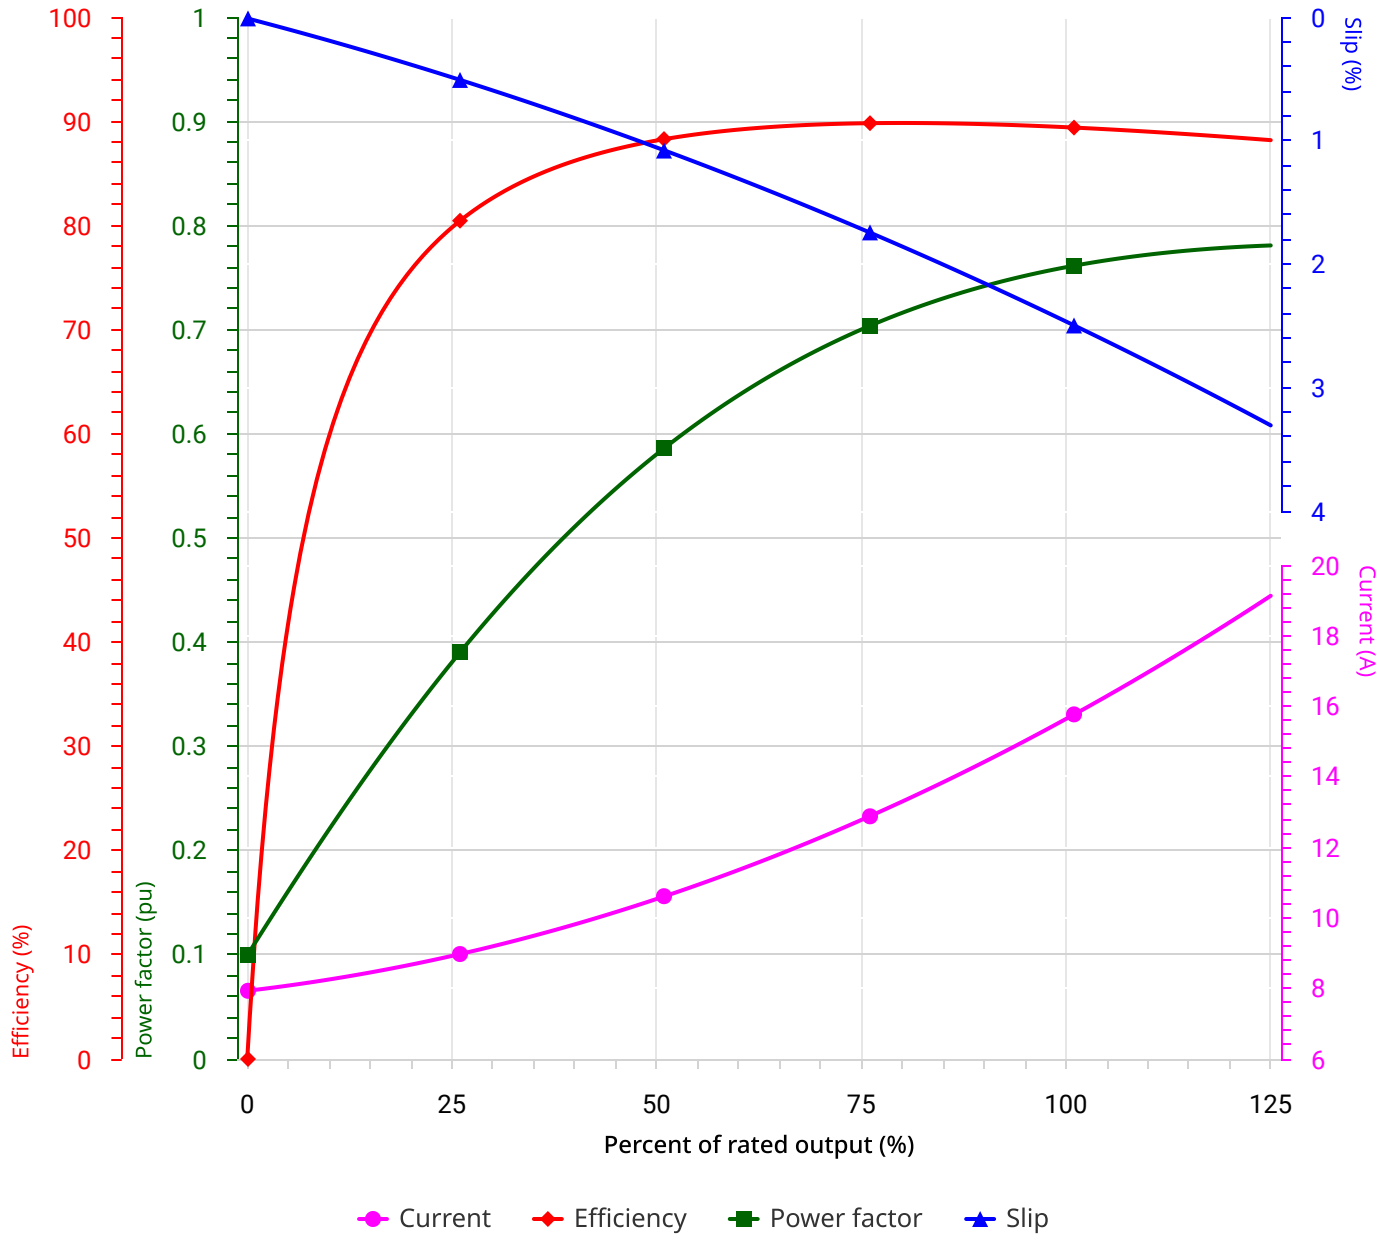

Performance	: 5 HP (3.7 kW) 200V 60Hz 6P 213/5T

Rated current	: 15.7 A	Moment of inertia (J)	: 0.062 kgm²
LRC	: 6.8 Code J	Duty cycle	: Cont.(S1)
Rated torque	: 3.10 kgfm	Insulation class	: F
Locked rotor torque	: 170 %	Service factor	: 1.25
Breakdown torque	: 260 %	Temperature rise	: 80 K
Rated speed	: 1170 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
				30/09/2016

Performed by	yasmim		189452/2016	
Checked by	lais		Page	Revision
Date	30/09/2016		2/2	1

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.