

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :							
Product line	: W22 IEEE 841 NEMA Premium Efficiency Three-Phase	Product code :	13869843				
Frame	: 444/5T	Cooling method	: IC411 - TEFC				
Insulation class	: F	Mounting	: F-1				
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)				
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line				
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 717 kg				
Protection degree	: IP55	Moment of inertia (J)	: 2.41 kgm ²				
Design	: B						
Output [HP]	125	100	100	100	125	125	125
Poles	4	4	4	4	4	4	4
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	460	380	400	415	380	400	415
Rated current [A]	139	139	136	132	168	160	155
L. R. Amperes [A]	904	890	952	1003	857	912	961
LRC [A]	6.5x(Code G)	6.4x(Code G)	7.0x(Code H)	7.6x(Code J)	5.1x(Code E)	5.7x(Code F)	6.2x(Code G)
No load current [A]	40.0	40.0	43.0	45.0	40.0	43.0	45.0
Rated speed [RPM]	1785	1485	1485	1487	1475	1480	1483
Slip [%]	0.83	1.00	1.00	0.87	1.67	1.33	1.13
Rated torque [kgfm]	50.8	48.9	48.9	48.8	61.3	61.2	61.2
Locked rotor torque [%]	200	200	229	240	160	180	190
Breakdown torque [%]	229	229	260	280	180	200	220
Service factor	1.15	1.00	1.00	1.00	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K
Locked rotor time	48s (cold) 27s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)
Noise level ²	73.0 dB(A)	69.0 dB(A)	69.0 dB(A)	69.0 dB(A)	69.0 dB(A)	69.0 dB(A)	69.0 dB(A)
Efficiency (%)	25%						
	50%	95.0	94.7	94.6	94.3	95.0	95.0
	75%	95.4	95.1	95.1	95.1	95.0	95.0
	100%	95.4	95.0	95.0	95.2	94.5	94.5
Power Factor	25%						
	50%	0.74	0.73	0.69	0.67	0.79	0.76
	75%	0.82	0.82	0.80	0.78	0.85	0.83
	100%	0.85	0.86	0.84	0.83	0.86	0.86
Losses at normative operating points (speed;torque), in percentage of rated output power							
Losses (%)	P1 (0,9;1,0)	4.5	4.5	4.5	4.5	4.5	4.5
	P2 (0,5;1,0)	3.4	3.4	3.4	3.4	3.4	3.4
	P3 (0,25;1,0)	3.1	3.1	3.1	3.1	3.1	3.1
	P4 (0,9;0,5)	2.4	2.4	2.4	2.4	2.4	2.4
	P5 (0,5;0,5)	1.4	1.4	1.4	1.4	1.4	1.4
	P6 (0,5;0,25)	0.9	0.9	0.9	0.9	0.9	0.9
	P7 (0,25;0,25)	0.5	0.5	0.5	0.5	0.5	0.5
Bearing type	: Drive end NU-319 C3	Non drive end 6316 C3	Foundation loads				
Sealing	: Inpro/Seal	Inpro/Seal	Max. traction	: 818 kgf			
Lubrication interval	: 5000 h	10000 h	Max. compression	: 1536 kgf			
Lubricant amount	: 45 g	34 g					
Lubricant type	: Mobil Polyrex EM						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date	
Performed by							
Checked by					Page	Revision	
Date	13/01/2024				1 / 9		

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/01/2024		2 / 9	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 13869843

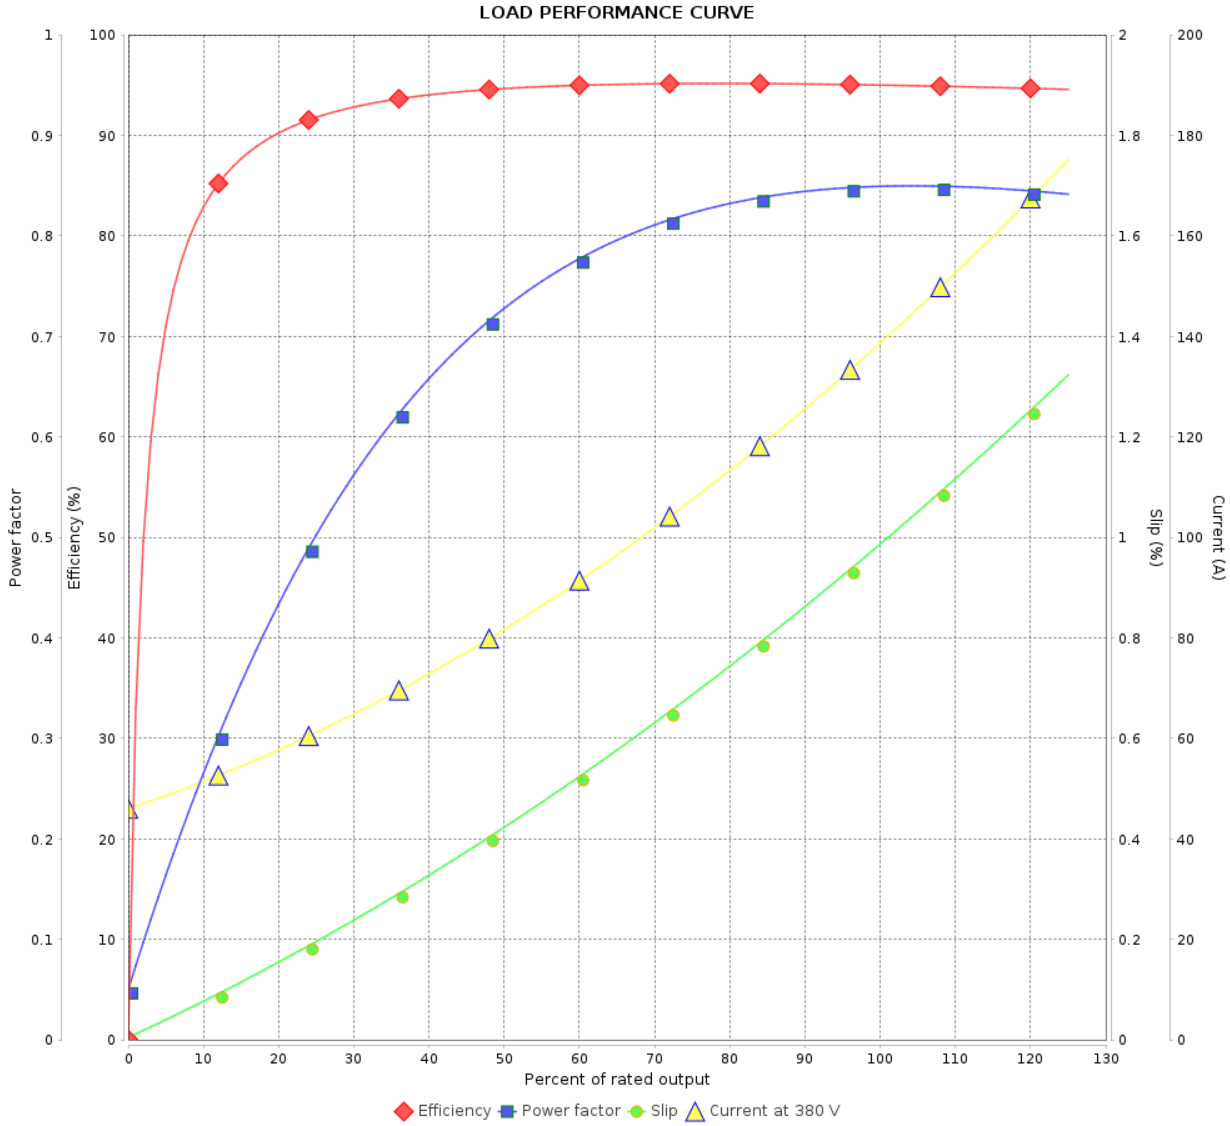

Performance : 380 V 50 Hz 4P IE3

Rated current	: 139 A	Moment of inertia (J)	: 2.41 kgm ²
LRC	: 6.4	Duty cycle	: Cont.(S1)
Rated torque	: 48.9 kgfm	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.00
Breakdown torque	: 229 %	Temperature rise	: 80 K
Rated speed	: 1485 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 9	Revision
Checked by				
Date	13/01/2024			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 13869843

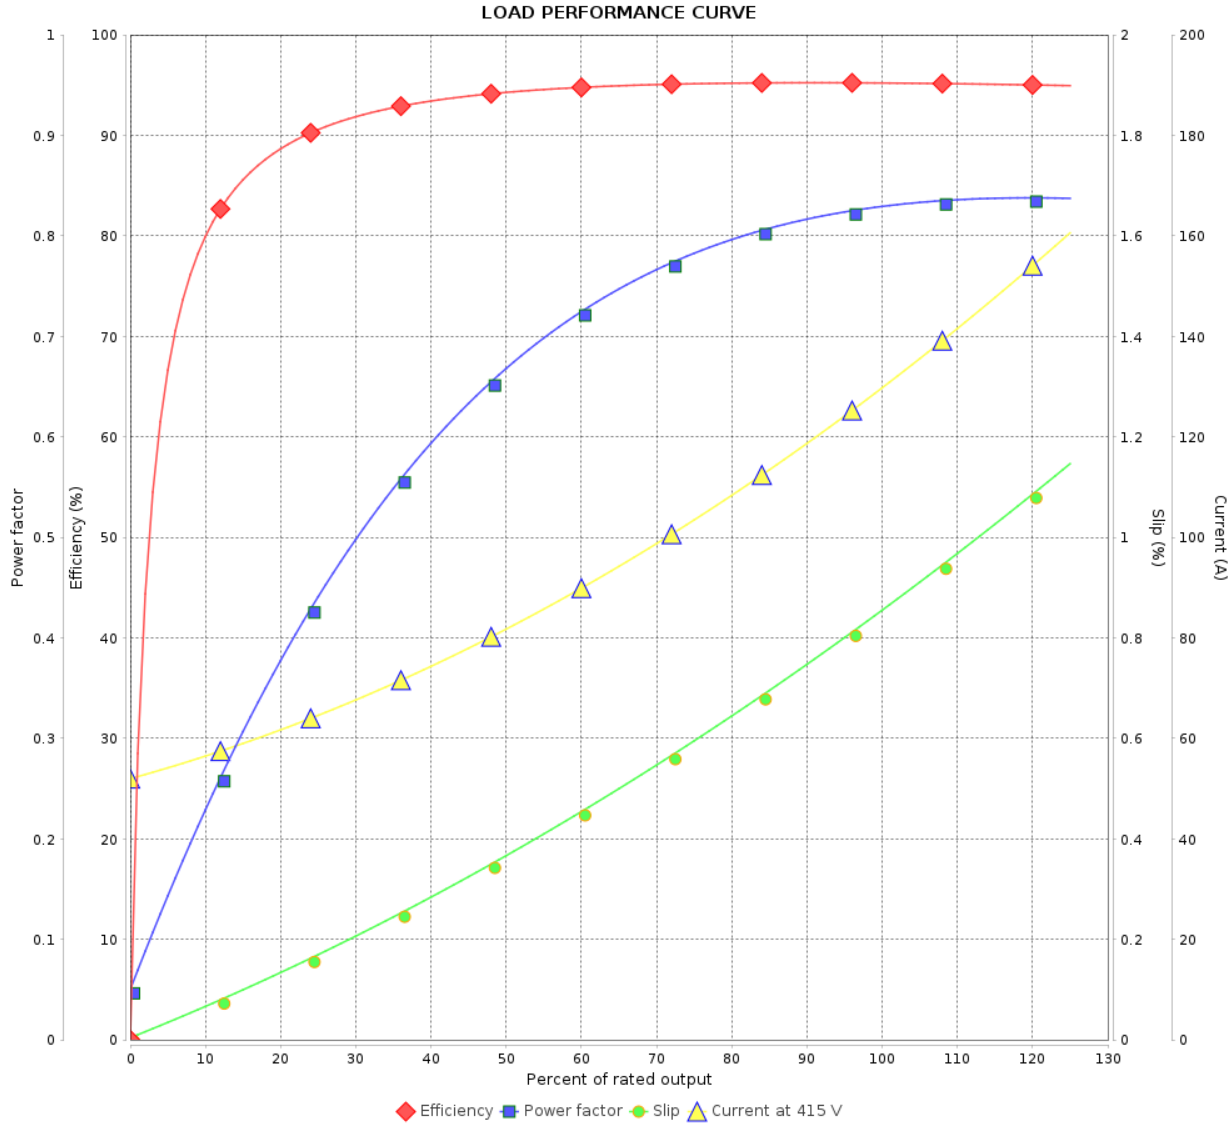

Performance : 415 V 50 Hz 4P IE3

Rated current	: 132 A	Moment of inertia (J)	: 2.41 kgm ²
LRC	: 7.6	Duty cycle	: Cont.(S1)
Rated torque	: 48.8 kgfm	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.00
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 1487 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			6 / 9	
Date	13/01/2024			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 13869843

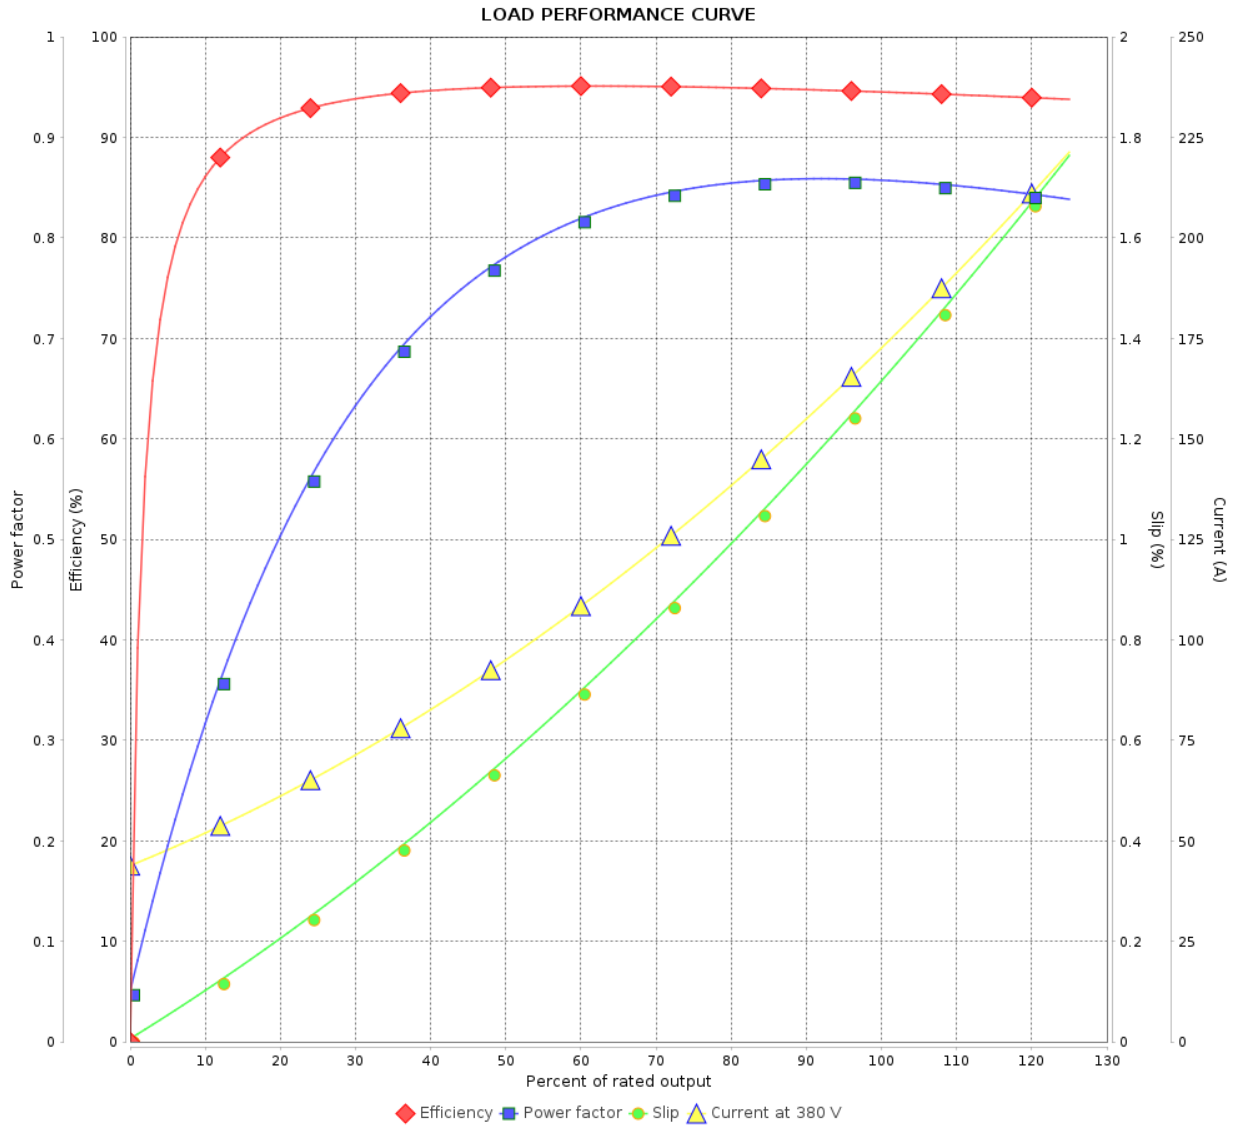

Performance : 380 V 50 Hz 4P IE2

Rated current : 168 A
 LRC : 5.1
 Rated torque : 61.3 kgfm
 Locked rotor torque : 160 %
 Breakdown torque : 180 %
 Rated speed : 1475 rpm

Moment of inertia (J) : 2.41 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
		Page	Revision	
		7 / 9		


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 13869843

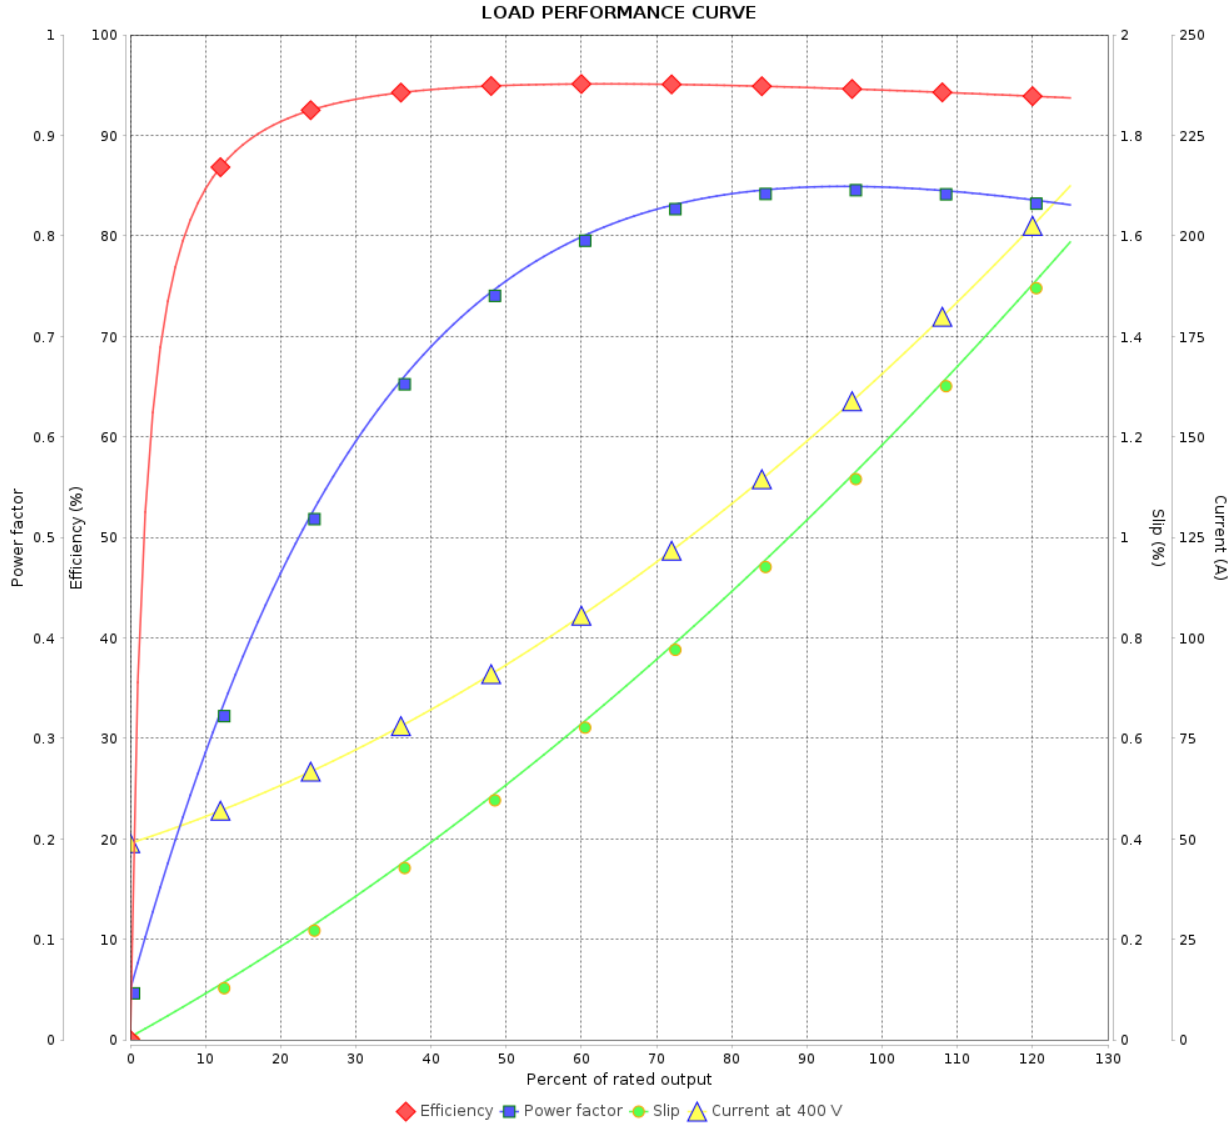

Performance : 400 V 50 Hz 4P IE2

Rated current	: 160 A	Moment of inertia (J)	: 2.41 kgm ²
LRC	: 5.7	Duty cycle	: Cont.(S1)
Rated torque	: 61.2 kgfm	Insulation class	: F
Locked rotor torque	: 180 %	Service factor	: 1.00
Breakdown torque	: 200 %	Temperature rise	: 80 K
Rated speed	: 1480 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 9	Revision
Checked by				
Date	13/01/2024			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 13869843

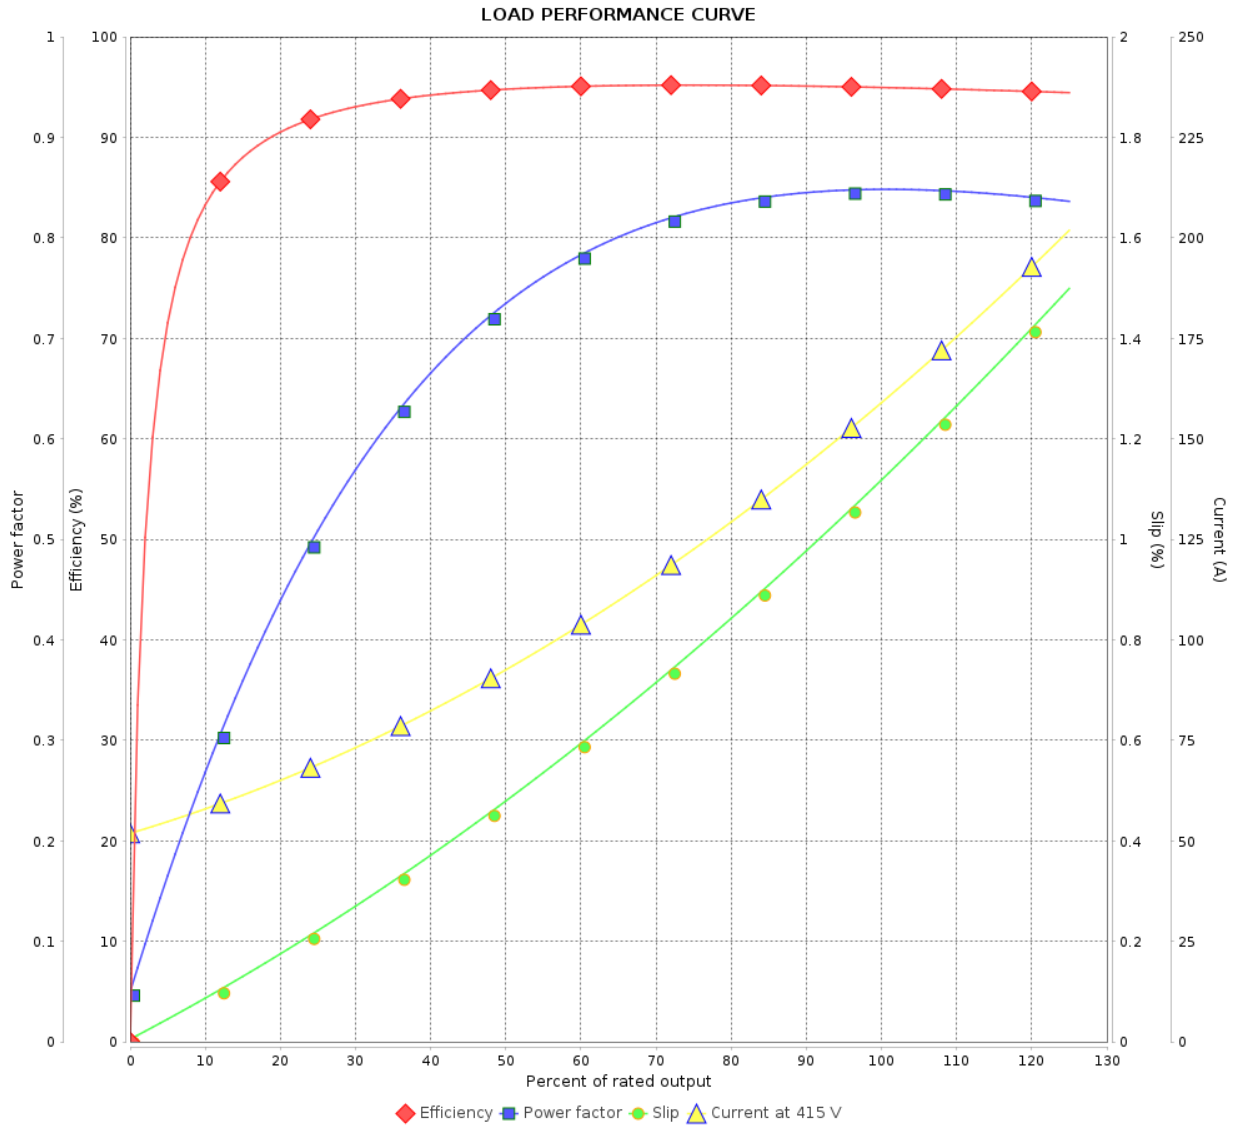

Performance : 415 V 50 Hz 4P IE2

Rated current : 155 A
 LRC : 6.2
 Rated torque : 61.2 kgfm
 Locked rotor torque : 190 %
 Breakdown torque : 220 %
 Rated speed : 1483 rpm

Moment of inertia (J) : 2.41 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				