

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase Product code : 13924892						
Frame	: 182/4T	Locked rotor time	: 41s (cold) 23s (hot)			
Output	: 3 HP (2.2 kW)	Temperature rise	: 80 K			
Poles	: 4	Duty cycle	: Cont.(S1)			
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C			
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.			
Rated current	: 3.13 A	Protection degree	: IP55			
L. R. Amperes	: 25.3 A	Cooling method	: IC411 - TEFC			
LRC	: 8.1x(Code K)	Mounting	: F-1			
No load current	: 1.60 A	Rotation ¹	: Both (CW and CCW)			
Rated speed	: 1760 rpm	Noise level ²	: 56.0 dB(A)			
Slip	: 2.22 %	Starting method	: Direct On Line			
Rated torque	: 1.24 kgfm	Approx. weight ³	: 49.3 kg			
Locked rotor torque	: 229 %					
Breakdown torque	: 340 %					
Insulation class	: F					
Service factor	: 1.25					
Moment of inertia (J)	: 0.0143 kgm ²					
Design	: B					
Output	50%	75%	100%	Foundation loads		
Efficiency (%)	87.5	88.5	89.5	Max. traction : 63 kgf		
Power Factor	0.61	0.73	0.79	Max. compression : 112 kgf		
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
11.0	8.6	8.3	6.1	3.9	2.8	2.0
		<u>Drive end</u>	<u>Non drive end</u>			
Bearing type	:	6207 ZZ	6206 ZZ			
Sealing	:	V'Ring	Lip Seal			
Lubrication interval	:	-	-			
Lubricant amount	:	-	-			
Lubricant type	:	Mobil Polyrex EM				
Notes:						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	15/01/2024				1 / 3	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Brake information

Voltage: 525-575 V
Brake Torque: 6.12 kgfm

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		2 / 3	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase Product code : 13924892

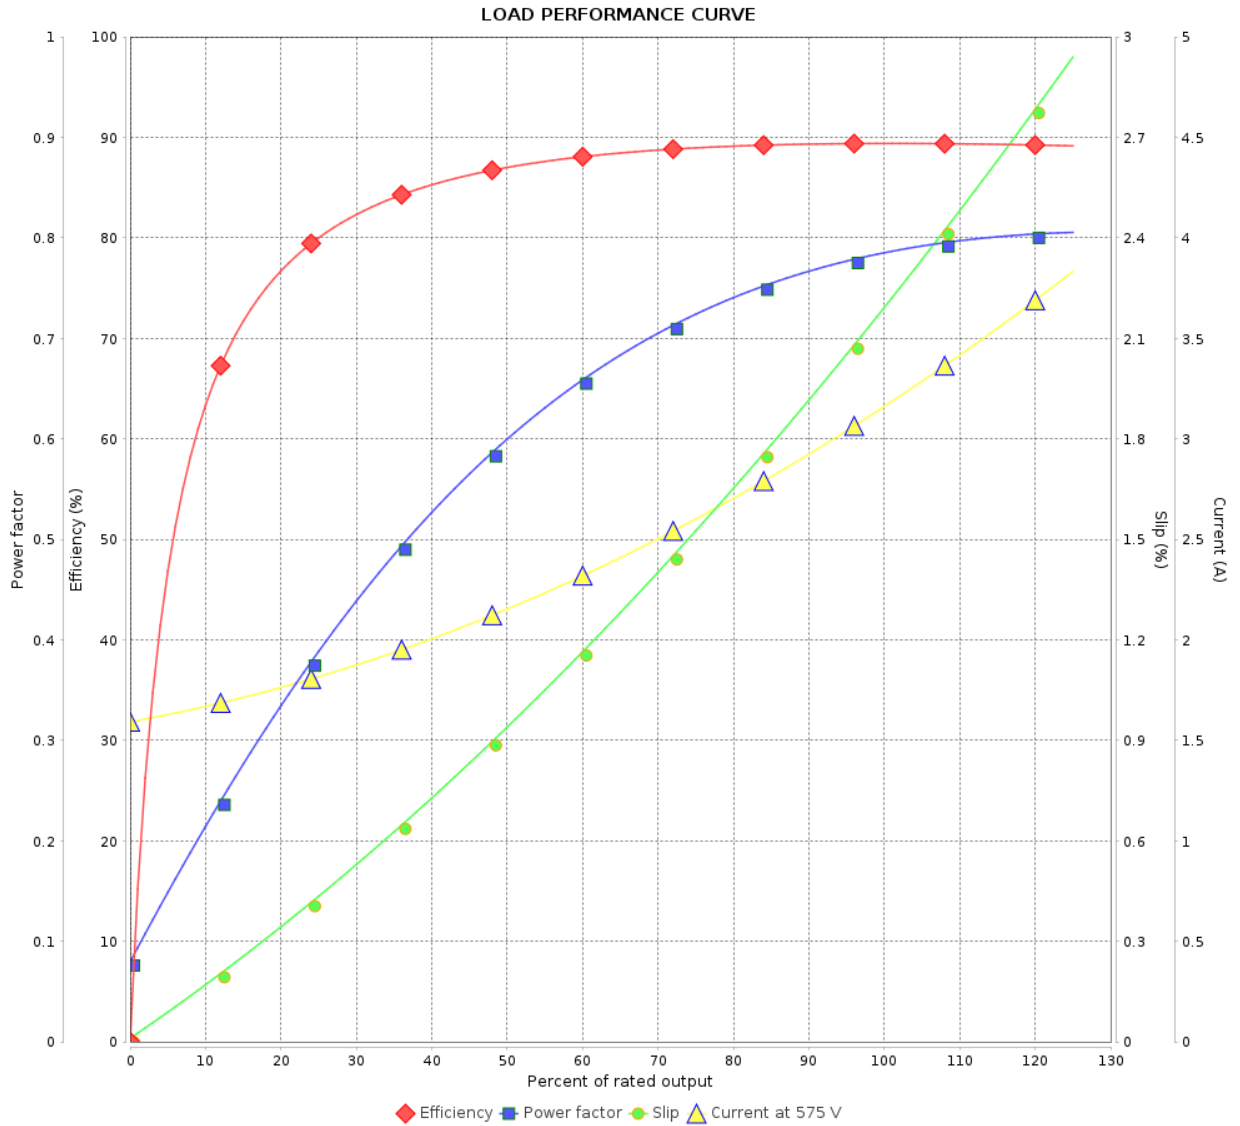

Performance : 575 V 60 Hz 4P

Rated current : 3.13 A
 LRC : 8.1
 Rated torque : 1.24 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 340 %
 Rated speed : 1760 rpm

Moment of inertia (J) : 0.0143 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				