

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :					
Product line		: Jet Pump - J type Three-Phase	Product code :	14032616	
Frame	: 56J	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: CCW		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 16.4 kg		
Protection degree	: IP55	Moment of inertia (J)	: 0.0046 kgm <sup>2</sup>		
Design	: B				
Output [HP]	1.5	1.5	1.5		
Poles	4	4	4		
Frequency [Hz]	60	50	50		
Rated voltage [V]	230/460	190/380	220/415		
Rated current [A]	4.04/2.02	4.82/2.41	4.28/2.27		
L. R. Amperes [A]	33.1/16.6	29.4/14.7	30.8/16.3		
LRC [A]	8.2x(Code K)	6.1x(Code H)	7.2x(Code J)		
No load current [A]	2.17/1.08	2.13/1.07	2.37/1.26		
Rated speed [RPM]	1750	1420	1435		
Slip [%]	2.78	5.33	4.33		
Rated torque [kgfm]	0.622	0.767	0.759		
Locked rotor torque [%]	270	210	260		
Breakdown torque [%]	300	250	300		
Service factor		1.15	1.15		
Temperature rise	80 K	80 K	80 K		
Locked rotor time	37s (cold) 21s (hot)	36s (cold) 20s (hot)	32s (cold) 18s (hot)		
Noise level <sup>2</sup>	52.0 dB(A)	49.0 dB(A)	49.0 dB(A)		
Efficiency (%)	25%				
	50%	85.5	84.7	83.5	
	75%	86.5	84.7	84.9	
	100%	86.5	82.7	84.1	
Power Factor	25%				
	50%	0.59	0.67	0.59	
	75%	0.72	0.78	0.72	
	100%	0.79	0.84	0.80	
Bearing type	: Drive end 6203 ZZ Non drive end 6202 ZZ	Foundation loads			
Sealing	: V'Ring V'Ring	Max. traction	: 65 kgf		
Lubrication interval	: - -	Max. compression	: 81 kgf		
Lubricant amount	: - -				
Lubricant type	: Mobil Polyrex EM				
Notes USABLE @208V 4.47A SF 1.00 SFA 4.47A					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	11/05/2022			1 / 4	


# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - J type Three-Phase      Product code : 14032616

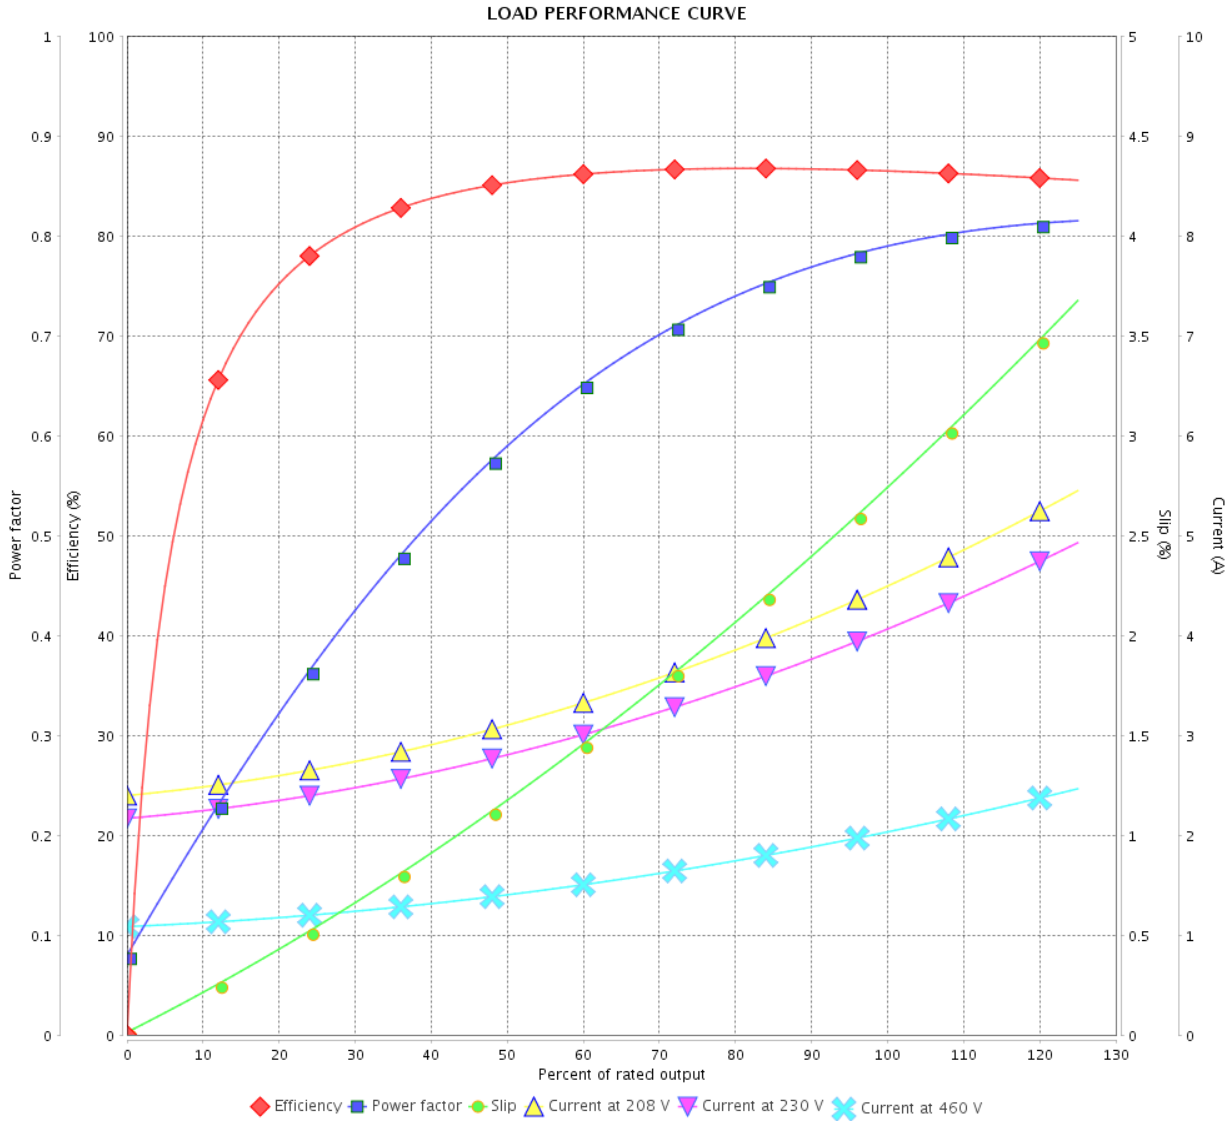

Performance : 230/460 V 60 Hz 4P

Rated current : 4.04/2.02 A  
 LRC : 8.2  
 Rated torque : 0.622 kgfm  
 Locked rotor torque : 270 %  
 Breakdown torque : 300 %  
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.0046 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor :  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 4	Revision
Checked by				
Date	11/05/2022			


# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - J type Three-Phase Product code : 14032616

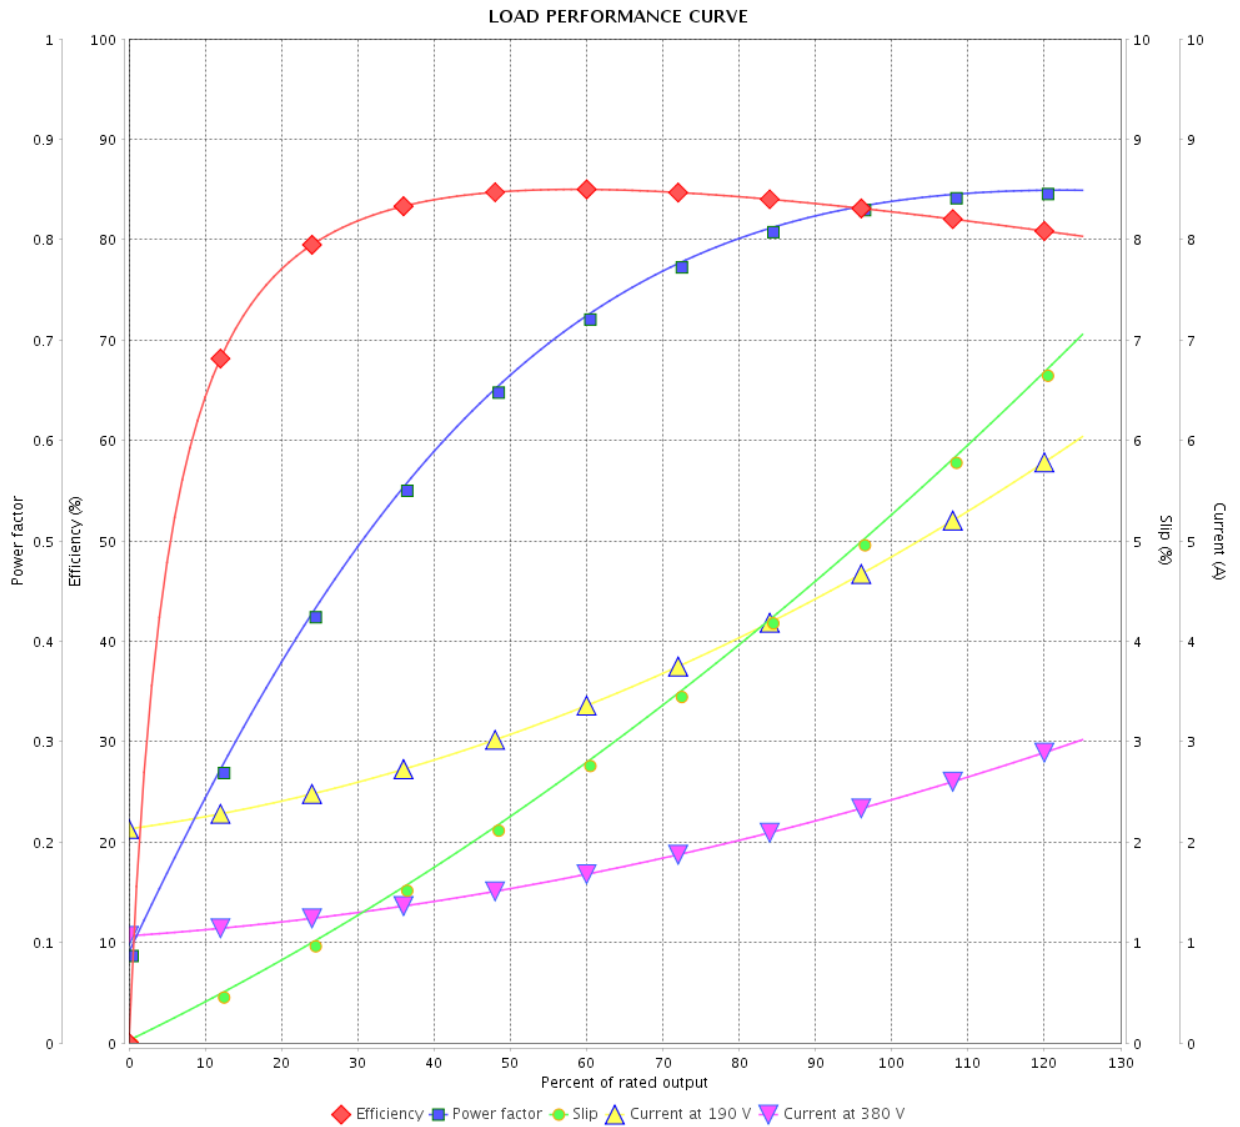

Performance : 190/380 V 50 Hz 4P

Rated current : 4.82/2.41 A  
 LRC : 6.1  
 Rated torque : 0.767 kgfm  
 Locked rotor torque : 210 %  
 Breakdown torque : 250 %  
 Rated speed : 1420 rpm

Moment of inertia (J) : 0.0046 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 4	Revision
Checked by				
Date	11/05/2022			


# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - J type Three-Phase      Product code : 14032616

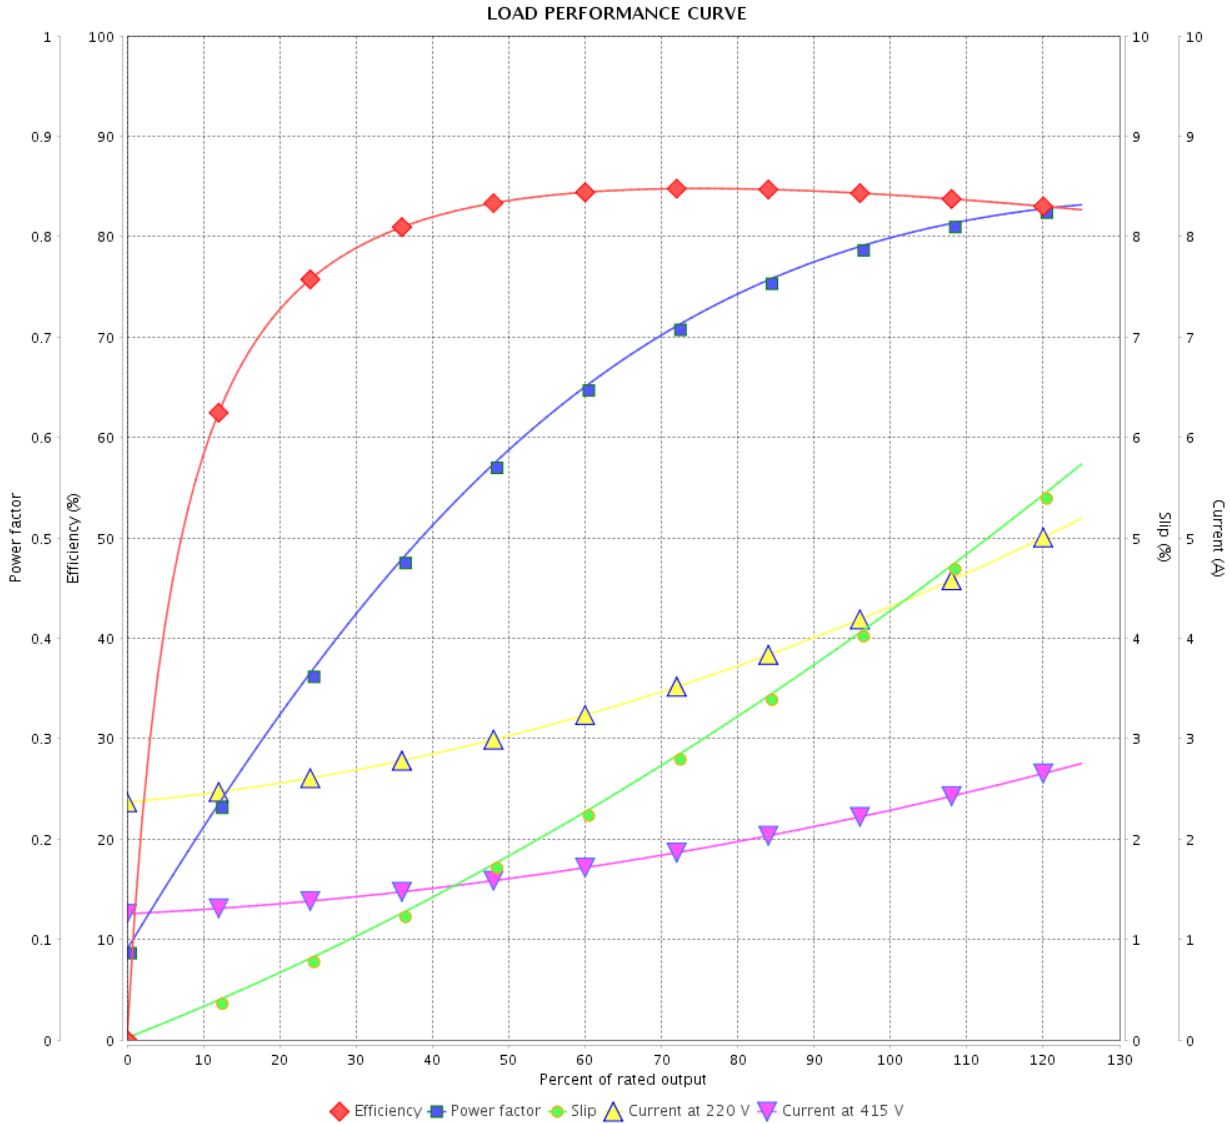

Performance : 220/415 V 50 Hz 4P

Rated current : 4.28/2.27 A  
 LRC : 7.2  
 Rated torque : 0.759 kgfm  
 Locked rotor torque : 260 %  
 Breakdown torque : 300 %  
 Rated speed : 1435 rpm

Moment of inertia (J) : 0.0046 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 4	Revision
Checked by				
Date	11/05/2022			