

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :							
Product line		: W21 Explosion Proof NEMA Premium Efficiency Three-Phase		Product code : 14189464			
Frame	:	213/5TC		Locked rotor time	:	21s (cold) 12s (hot)	
Output	:	7.5 HP (5.5 kW)		Temperature rise	:	80 K	
Poles	:	4		Duty cycle	:	Cont.(S1)	
Frequency	:	60 Hz		Ambient temperature	:	-20°C to +40°C	
Rated voltage	:	575 V		Altitude	:	1000 m.a.s.l.	
Rated current	:	7.53 A		Protection degree	:	IP55	
L. R. Amperes	:	50.4 A		Cooling method	:	IC411 - TEFC	
LRC	:	6.7x(Code H)		Mounting	:	F-1	
No load current	:	3.20 A		Rotation ¹	:	Both (CW and CCW)	
Rated speed	:	1765 rpm		Noise level ²	:	58.0 dB(A)	
Slip	:	1.94 %		Starting method	:	Direct On Line	
Rated torque	:	3.08 kgfm		Approx. weight ³	:	96.3 kg	
Locked rotor torque	:	240 %					
Breakdown torque	:	280 %					
Insulation class	:	F					
Service factor	:	1.15					
Moment of inertia (J)	:	0.0582 kgm ²					
Design	:	B					
Output	50%	75%	100%	Foundation loads			
Efficiency (%)	90.2	91.0	91.7	Max. traction		: 111 kgf	
Power Factor	0.60	0.73	0.80	Max. compression		: 208 kgf	
				<u>Drive end</u>		<u>Non drive end</u>	
Bearing type	:	6308 2RS		6207 2RS			
Sealing	:	Oil Seal		Lip Seal			
Lubrication interval	:	-		-			
Lubricant amount	:	-		-			
Lubricant type	:	Mobil Polyrex EM					
Notes:							
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date	
Performed by							
Checked by					Page	Revision	
Date	15/01/2024				1 / 3		

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		2 / 3	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W21 Explosion Proof NEMA Premium
Efficiency Three-Phase

Product code : 14189464

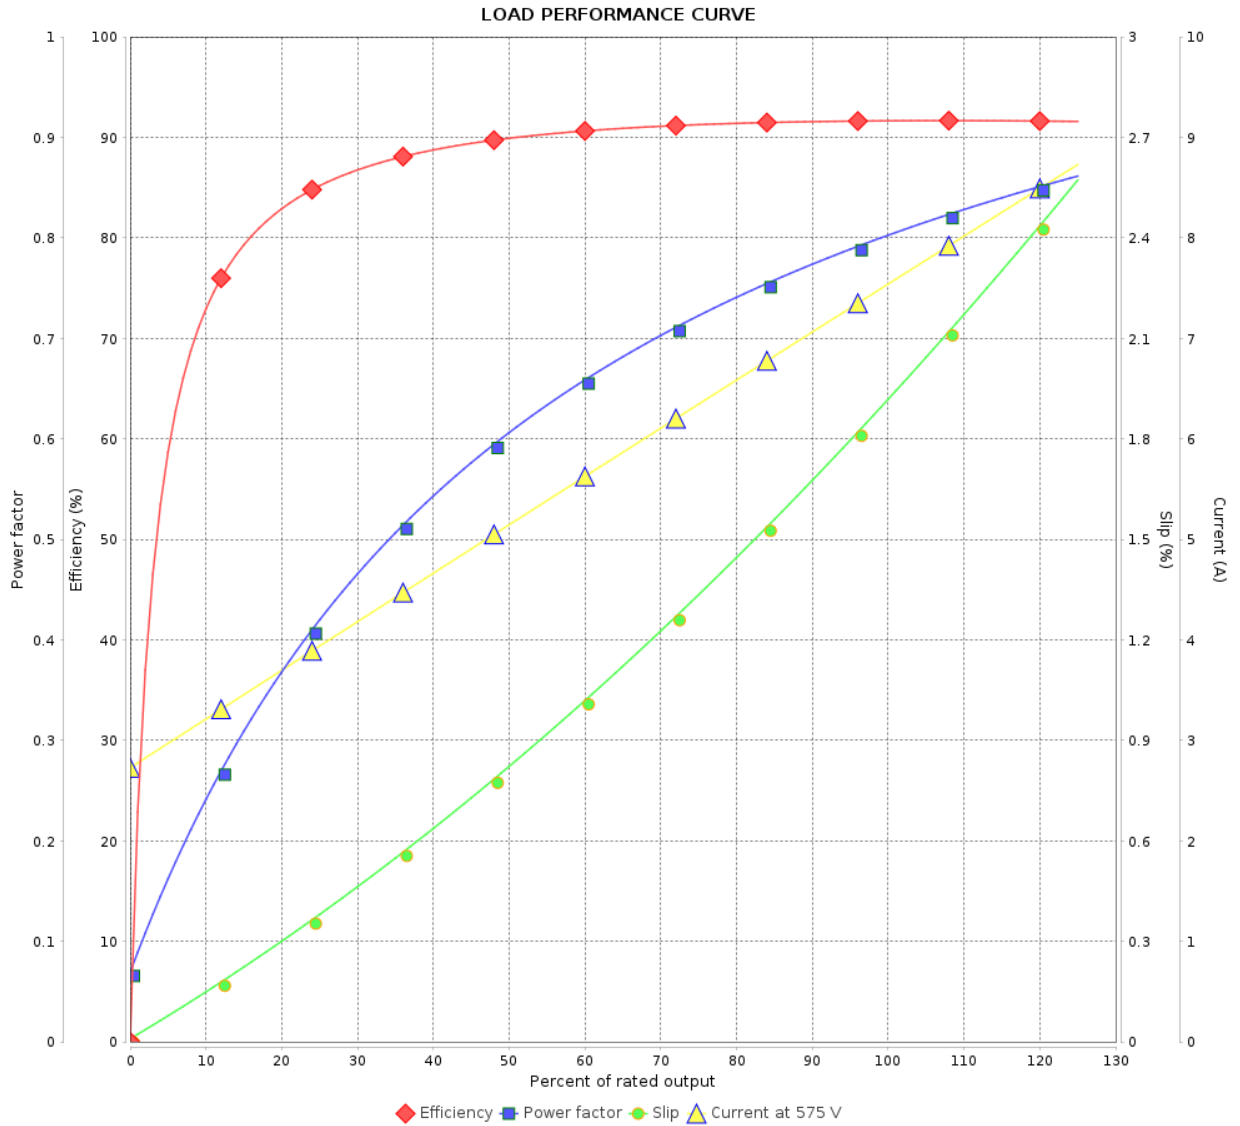

Performance : 575 V 60 Hz 4P

Rated current : 7.53 A
 LRC : 6.7
 Rated torque : 3.08 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 280 %
 Rated speed : 1765 rpm

Moment of inertia (J) : 0.0582 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				