

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line	: W22 Brake Motor NEMA Premium Efficiency Three-Phase					
Product code	: 14213926					
Frame : 284/6T Output : 25 HP (18.5 kW) Poles : 4 Frequency : 60 Hz Rated voltage : 575 V Rated current : 23.6 A L. R. Amperes : 146 A LRC : 6.2x(Code G) No load current : 8.80 A Rated speed : 1770 rpm Slip : 1.67 % Rated torque : 10.3 kgfm Locked rotor torque : 240 % Breakdown torque : 270 % Insulation class : F Service factor : 1.25 Moment of inertia (J) : 0.2153 kgm ² Design : B	Locked rotor time : 43s (cold) 24s (hot) Temperature rise : 80 K Duty cycle : Cont.(S1) Ambient temperature : -20°C to +40°C Altitude : 1000 m.a.s.l. Protection degree : IP55 Cooling method : IC411 - TEFC Mounting : F-1 Rotation ¹ : Both (CW and CCW) Noise level ² : 63.0 dB(A) Starting method : Direct On Line Approx. weight ³ : 213 kg					
Output	50% 75% 100%					
Efficiency (%)	92.4 93.0 93.6					
Power Factor	0.70 0.80 0.84					
Foundation loads						
Max. traction : 289 kgf						
Max. compression : 502 kgf						
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
6.8	5.8	5.3	3.1	2.2	1.4	1.0
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6311 C3		6211 C3		
Sealing	:	V'Ring		Lip Seal		
Lubrication interval	:	20000 h		20000 h		
Lubricant amount	:	18 g		11 g		
Lubricant type	:	Mobil Polyrex EM				
Notes:						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	25/04/2024				1 / 3	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Brake information

Voltage: 525-575 V
Brake Torque: 26.5 kgfm

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	25/04/2024		2 / 3	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 Brake Motor NEMA Premium Efficiency Product code : 14213926
 Three-Phase

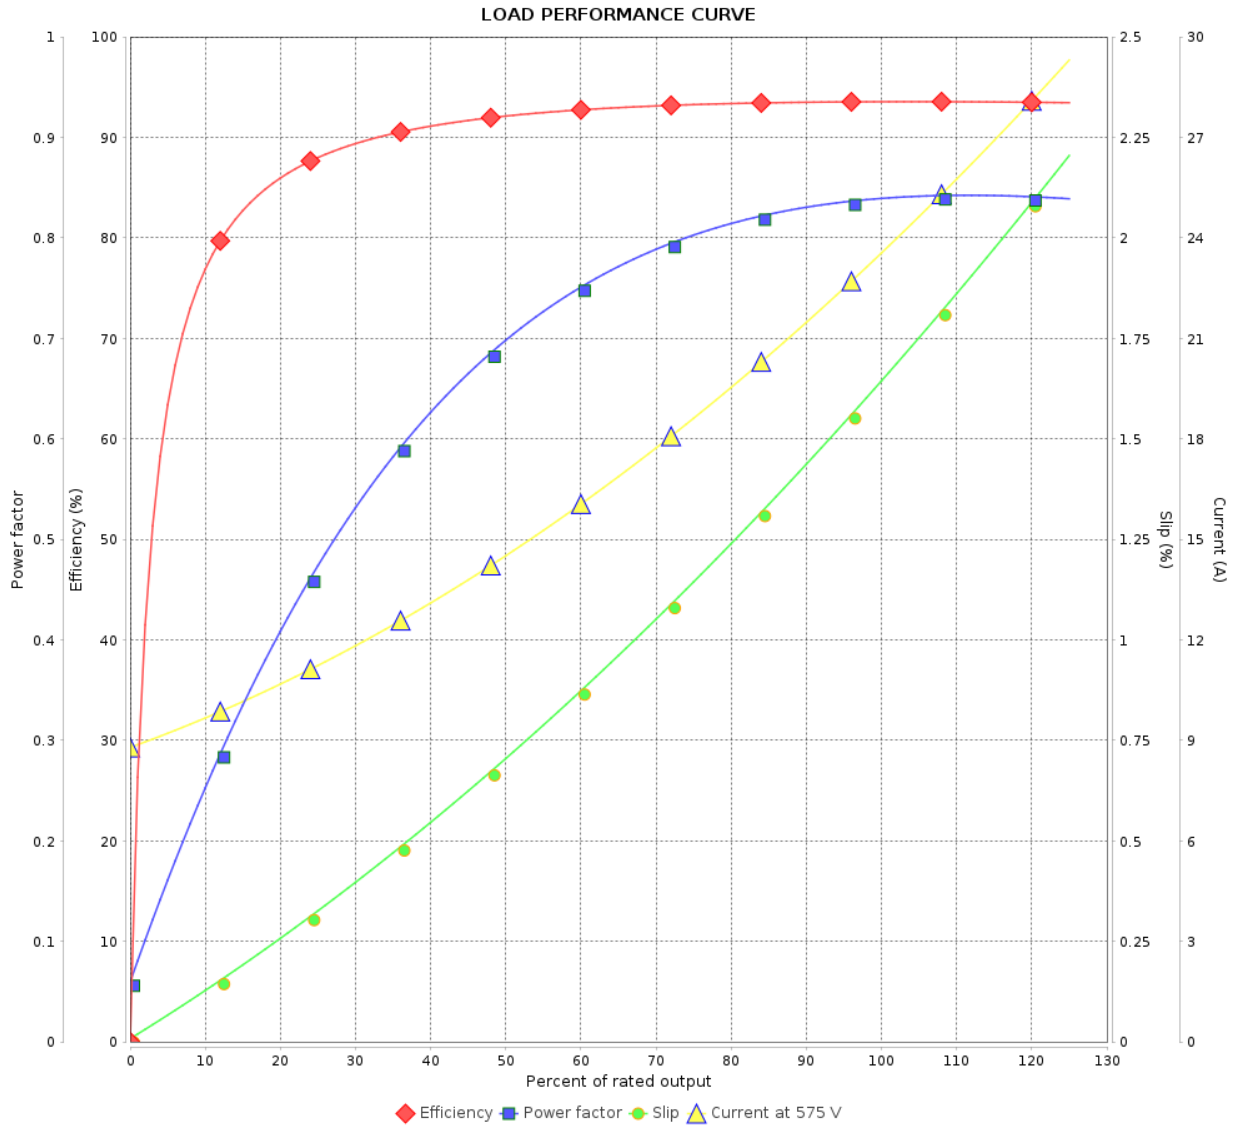

Performance : 575 V 60 Hz 4P

Rated current	: 23.6 A	Moment of inertia (J)	: 0.2153 kgm ²
LRC	: 6.2	Duty cycle	: Cont.(S1)
Rated torque	: 10.3 kgfm	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.25
Breakdown torque	: 270 %	Temperature rise	: 80 K
Rated speed	: 1770 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 3	Revision
Checked by				
Date	25/04/2024			