

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 Tru-Metric IE3 Three-Phase Product code : 14264400

Frame	: 160M	Locked rotor time	: 23s (cold) 13s (hot)
Output	: 15 HP (11 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 35.8/17.9 A	Protection degree	: IP55
L. R. Amperes	: 322/161 A	Cooling method	: IC411 - TEFC
LRC	: 9.0	Mounting	: B35R(D)
No load current	: 16.0/8.00 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 3560 rpm	Noise level ²	: 72.0 dB(A)
Slip	: 1.11 %	Starting method	: Direct On Line
Rated torque	: 3.06 kgfm	Approx. weight ³	: 136 kg
Locked rotor torque	: 330 %		
Breakdown torque	: 400 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0419 kgm ²		
Design	: N		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	89.5	91.0	91.7	Max. traction	: 124 kgf
Power Factor	0.68	0.79	0.84	Max. compression	: 260 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
8.4	6.1	5.5	5.4	3.1	2.4	1.5

	Drive end	Non drive end
Bearing type	: 6309 C3	: 6209 C3
Sealing	: V'Ring	: V'Ring
Lubrication interval	: 19000 h	: 20000 h
Lubricant amount	: 13 g	: 9 g
Lubricant type	: Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/01/2024		1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Tru-Metric IE3 Three-Phase

Product code : 14264400

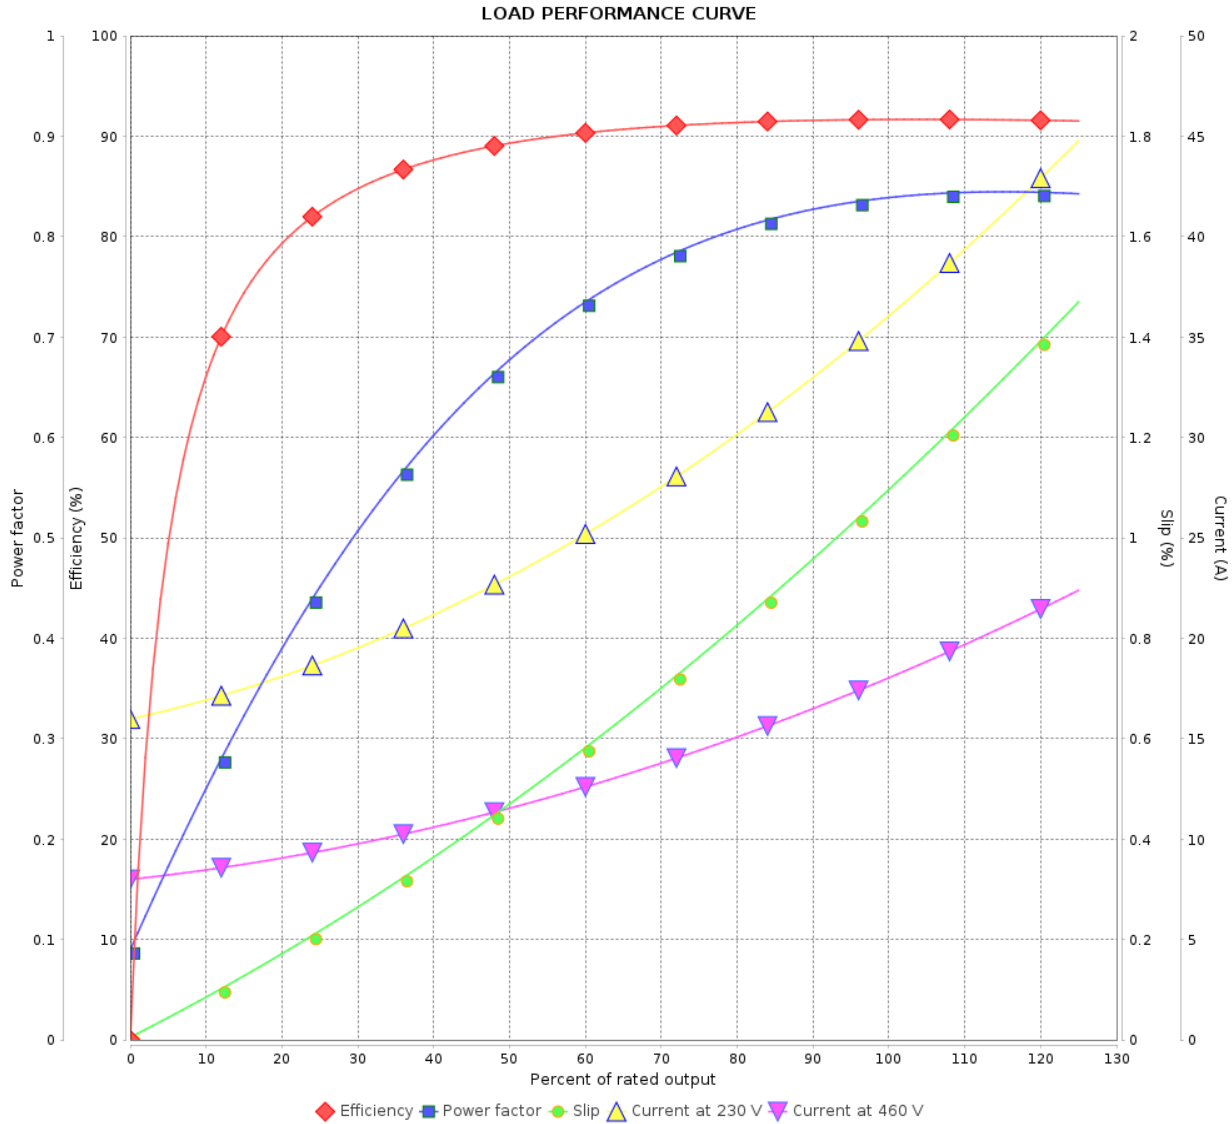

Performance : 230/460 V 60 Hz 2P

Rated current : 35.8/17.9 A
 LRC : 9.0
 Rated torque : 3.06 kgfm
 Locked rotor torque : 330 %
 Breakdown torque : 400 %
 Rated speed : 3560 rpm

Moment of inertia (J) : 0.0419 kgm²
 Duty cycle : S1
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				