

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line : W40 NEMA Premium Efficiency Three-Phase		Product code : 14272520				
Frame : 364/5TC Output : 75 HP (55 kW) Poles : 4 Frequency : 60 Hz Rated voltage : 575 V Rated current : 68.4 A L. R. Amperes : 465 A LRC : 6.8x(Code G) No load current : 24.4 A Rated speed : 1780 rpm Slip : 1.11 % Rated torque : 30.6 kgfm Locked rotor torque : 220 % Breakdown torque : 260 % Insulation class : F Service factor : 1.25 Moment of inertia (J) : 0.7059 kgm ² Design : B	Locked rotor time : 25s (cold) 14s (hot) Temperature rise : 80 K Duty cycle : Cont.(S1) Ambient temperature : -20°C to +40°C Altitude : 1000 m.a.s.l. Protection degree : IP23 Cooling method : IC01 - ODP Mounting : F-1 Rotation ¹ : Both (CW and CCW) Noise level ² : 69.0 dB(A) Starting method : Direct On Line Approx. weight ³ : 360 kg					
Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	94.4	94.5	95.0	95.0	Max. traction : 714 kgf	
Power Factor	0.48	0.73	0.82	0.85	Max. compression : 1074 kgf	
			<u>Drive end</u>		<u>Non drive end</u>	
Bearing type	:		6314 C3		6212 Z C3	
Sealing	:		Without Bearing Seal		Without Bearing Seal	
Lubrication interval	:		20000 h		20000 h	
Lubricant amount	:		27 g		13 g	
Lubricant type	:		Mobil Polyrex EM			
Notes:						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	15/01/2024				1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W40 NEMA Premium Efficiency Three-Phase

Product code : 14272520

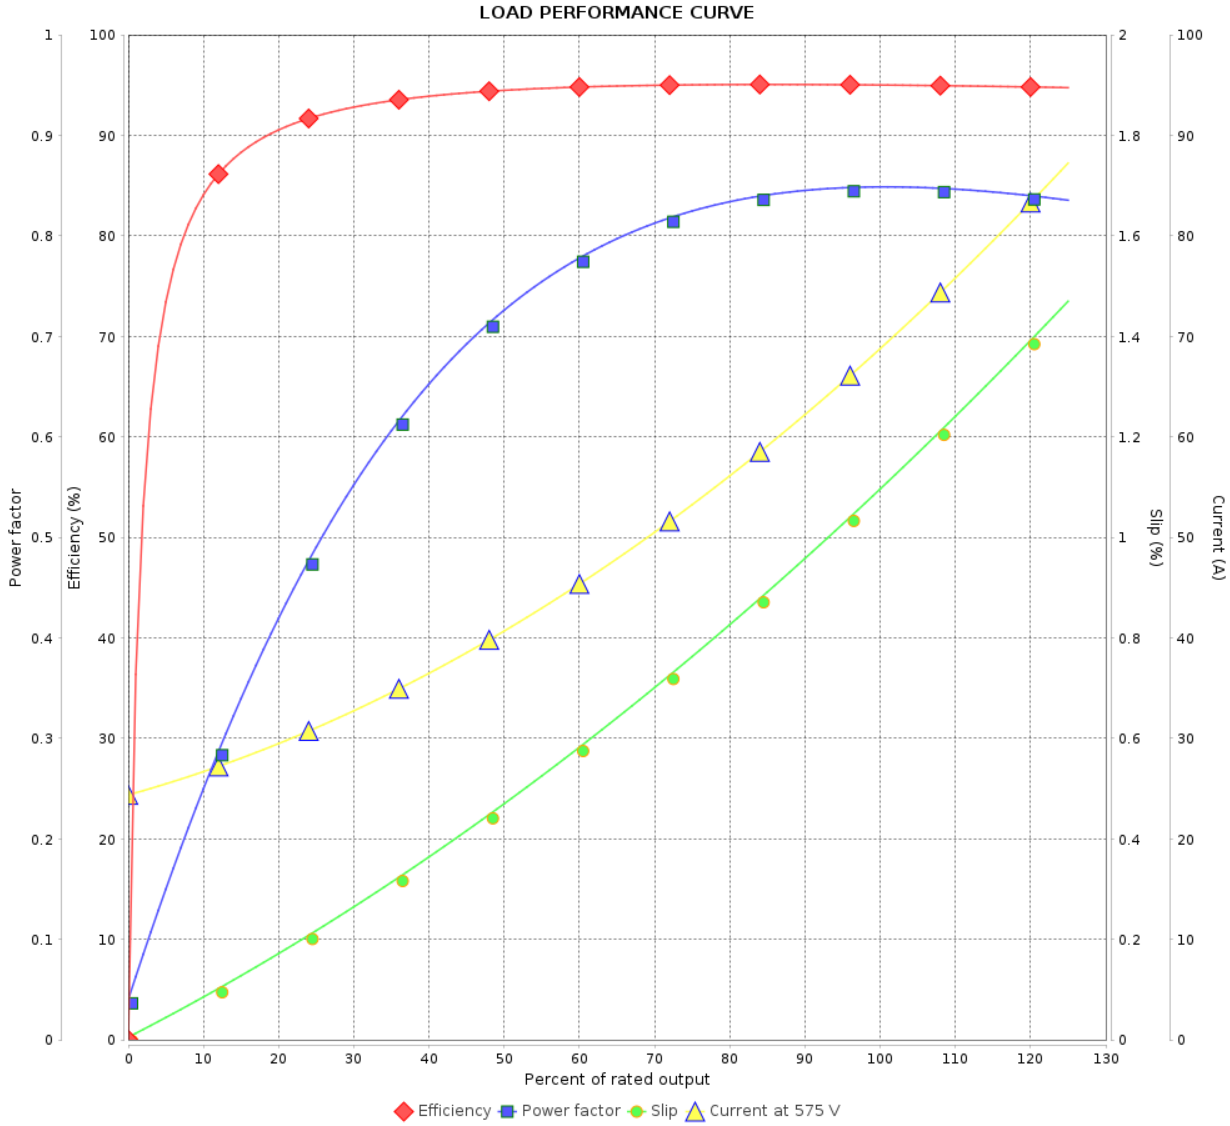

Performance : 575 V 60 Hz 4P

Rated current : 68.4 A
 LRC : 6.8
 Rated torque : 30.6 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 260 %
 Rated speed : 1780 rpm

Moment of inertia (J) : 0.7059 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	15/01/2024			