

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :							
Product line		: W21 Explosion Proof NEMA Premium Efficiency Three-Phase		Product code : 14283772			
Frame	:	182/4T		Locked rotor time	:	46s (cold) 26s (hot)	
Output	:	5 HP (3.7 kW)		Temperature rise	:	80 K	
Poles	:	2		Duty cycle	:	Cont.(S1)	
Frequency	:	60 Hz		Ambient temperature	:	-20°C to +40°C	
Rated voltage	:	575 V		Altitude	:	1000 m.a.s.l.	
Rated current	:	4.88 A		Protection degree	:	IP55	
L. R. Amperes	:	36.6 A		Cooling method	:	IC411 - TEFC	
LRC	:	7.5x(Code J)		Mounting	:	F-1	
No load current	:	1.76 A		Rotation ¹	:	Both (CW and CCW)	
Rated speed	:	3490 rpm		Noise level ²	:	69.0 dB(A)	
Slip	:	3.06 %		Starting method	:	Direct On Line	
Rated torque	:	1.04 kgfm		Approx. weight ³	:	60.9 kg	
Locked rotor torque	:	250 %					
Breakdown torque	:	380 %					
Insulation class	:	F					
Service factor	:	1.15					
Moment of inertia (J)	:	0.0080 kgm ²					
Design	:	B					
Output	50%	75%	100%	Foundation loads			
Efficiency (%)	85.5	87.5	88.5	Max. traction		: 52 kgf	
Power Factor	0.70	0.81	0.86	Max. compression		: 113 kgf	
				<u>Drive end</u>		<u>Non drive end</u>	
Bearing type	:	6307 2RS		6206 2RS			
Sealing	:	Oil Seal		Lip Seal			
Lubrication interval	:	-		-			
Lubricant amount	:	-		-			
Lubricant type	:	Mobil Polyrex EM					
Notes:							
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date	
Performed by							
Checked by					Page	Revision	
Date	15/01/2024				1 / 3		

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		2 / 3	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W21 Explosion Proof NEMA Premium
Efficiency Three-Phase

Product code : 14283772

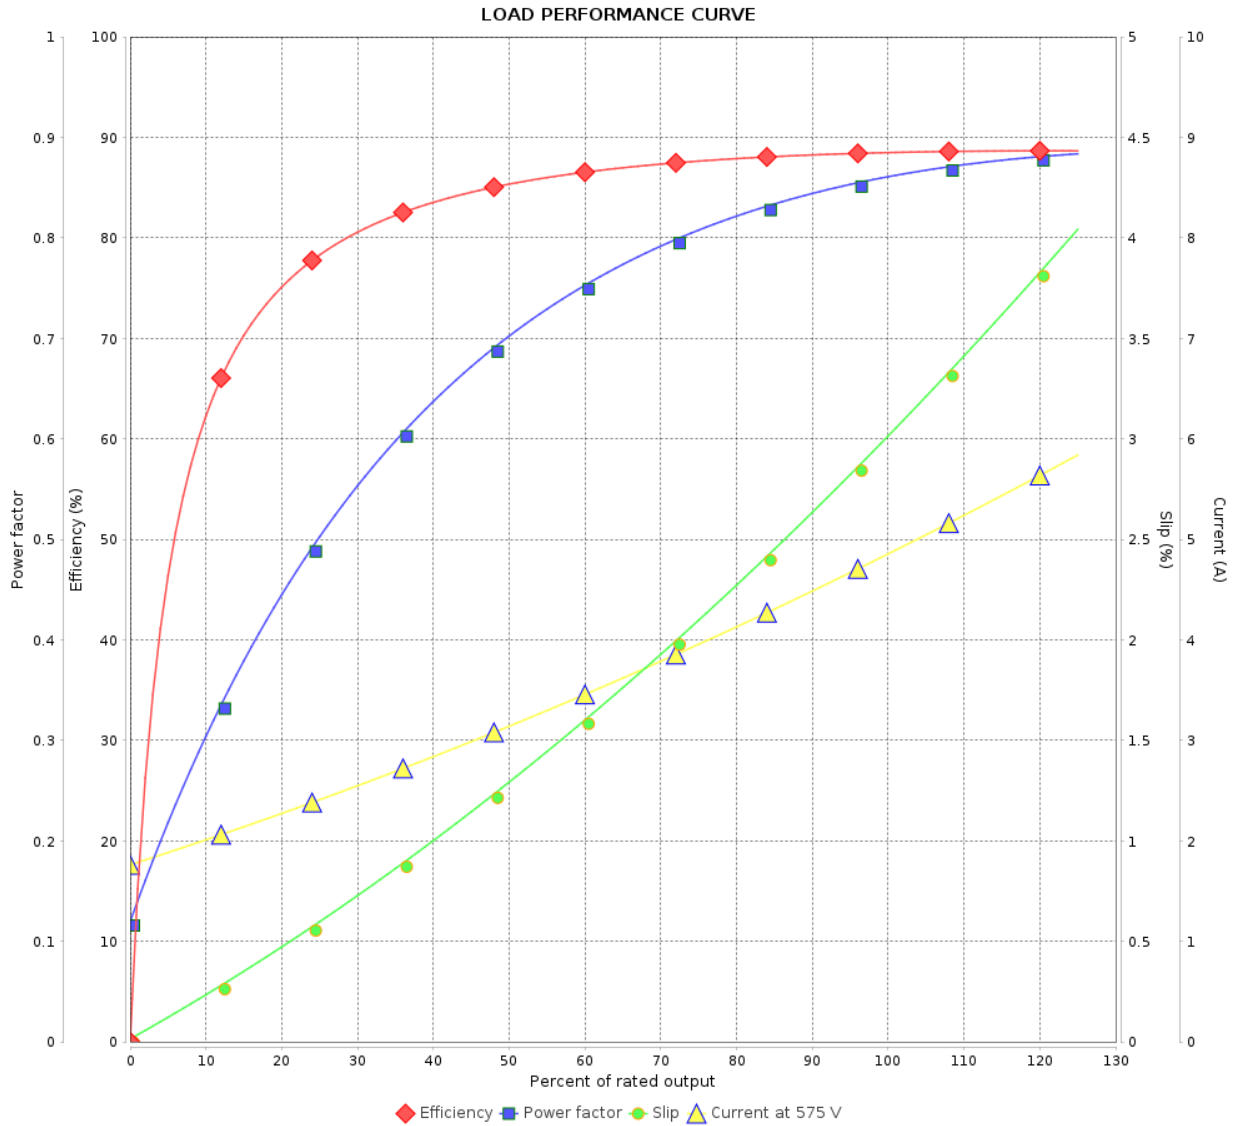

Performance : 575 V 60 Hz 2P

Rated current : 4.88 A
 LRC : 7.5
 Rated torque : 1.04 kgfm
 Locked rotor torque : 250 %
 Breakdown torque : 380 %
 Rated speed : 3490 rpm

Moment of inertia (J) : 0.0080 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 3		
Date		15/01/2024		