

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :					
Product line : W21 Explosion Proof NEMA Premium Efficiency Three-Phase		Product code : 14325200			
Frame	: 143/5T	Locked rotor time	: 19s (cold) 11s (hot)		
Output	: 2 HP (1.5 kW)	Temperature rise	: 80 K		
Poles	: 4	Duty cycle	: Cont.(S1)		
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C		
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.		
Rated current	: 2.23 A	Protection degree	: IP55		
L. R. Amperes	: 19.9 A	Cooling method	: IC411 - TEFC		
LRC	: 8.9x(Code L)	Mounting	: F-1		
No load current	: 1.28 A	Rotation <sup>1</sup>	: Both (CW and CCW)		
Rated speed	: 1750 rpm	Noise level <sup>2</sup>	: 51.0 dB(A)		
Slip	: 2.78 %	Starting method	: Direct On Line		
Rated torque	: 0.829 kgfm	Approx. weight <sup>3</sup>	: 33.6 kg		
Locked rotor torque	: 270 %				
Breakdown torque	: 320 %				
Insulation class	: F				
Service factor	: 1.15				
Moment of inertia (J)	: 0.0067 kgm <sup>2</sup>				
Design	: B				
Output	50%	75%	100%	Foundation loads	
Efficiency (%)	84.0	85.5	86.5	Max. traction : 59 kgf	
Power Factor	0.56	0.70	0.78	Max. compression : 92 kgf	
		<u>Drive end</u>		<u>Non drive end</u>	
Bearing type	:	6205 2RS		6204 2RS	
Sealing	:	Oil Seal		Lip Seal	
Lubrication interval	:	-		-	
Lubricant amount	:	-		-	
Lubricant type	:	Mobil Polyrex EM			
Notes:					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	15/01/2024			1 / 3	

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

### Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		2 / 3	

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W21 Explosion Proof NEMA Premium  
Efficiency Three-Phase

Product code : 14325200

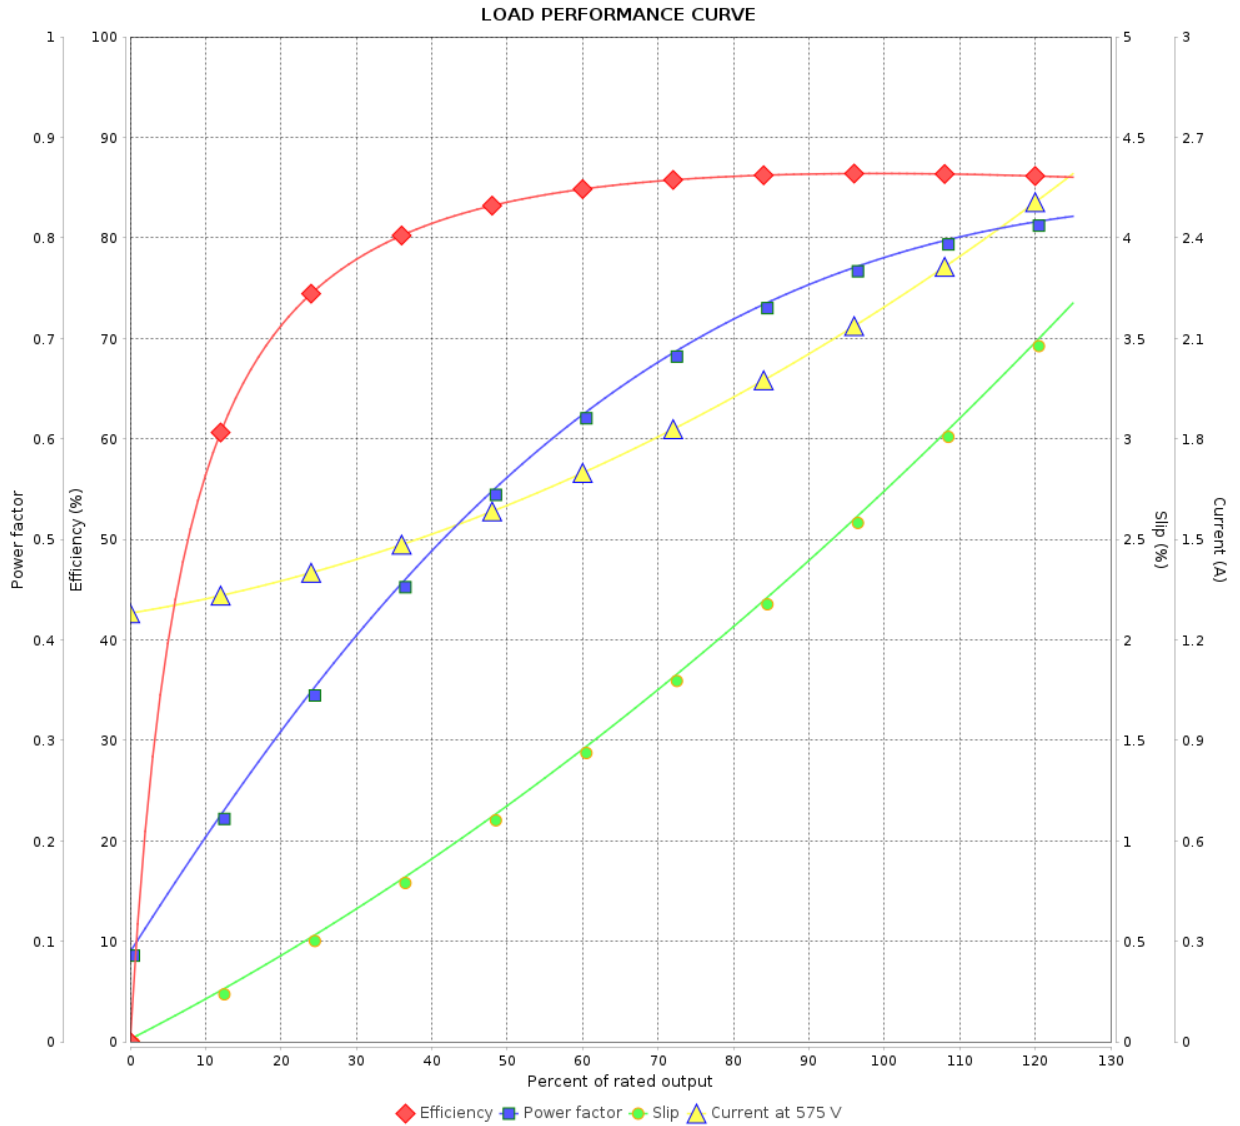

Performance : 575 V 60 Hz 4P

Rated current : 2.23 A  
 LRC : 8.9  
 Rated torque : 0.829 kgfm  
 Locked rotor torque : 270 %  
 Breakdown torque : 320 %  
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.0067 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				