DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : Standard Saw Arbor Motor
Product code : 14337393

Frame	: 80S/MS	Locked rotor time	: 9 s (hot) 16 s (cold)
Output	: 3 HP (2.2 kW)	Temperature rise[4]	: 80 K
Poles	: 2	Duty cycle	: S6
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 208-230/460 V	Altitude	: 1000 m.a.s.l
Rated current	: 9.49-8.58/4.29 A	Protection degree	: IP54
L. R. Amperes	: 62.6/31.3 A	Cooling method	: IC411 - TEFC
LRC	: 7.3 Code K	Mounting	: B3R(D)
No load current	: 4.11/2.06 A	Rotation[1]	: Counter clockwise
Rated speed	: 3500 rpm	Noise level[2]	: 62 dB(A)
Slip	: 2.78 %	Starting method	: Direct On Line
Rated torque	: 0.622 kgfm	Approx. weight[3]	: 38.5 kg
Locked rotor torque	: 330 %	Design	: N
Pull up torque	: 280 %		
Breakdown torque	: 370 %		
Insulation class	: F		
Service factor	: 1.00		
Moment of inertia (J)	: 0.0032 kgm²		

Output	Start	50%	75%	100%
Efficiency (%)	-	76.0	79.5	80.5
Power Factor	0.78	0.65	0.75	0.8

	Drive end	Non drive end
Bearing type	6307-ZZ	6207-ZZ
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	MOBIL POLYREX EM	

Load type	: -
Load torque	: -
Load inertia (J=GD²/4)	: -

Foundation loads
Max. traction : 29 kgf
Max. compression : 67 kgf

Notes:

Standards

Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Performed	Checked	Date
				2026/10/30


Performed by				
Checked by			Page	Revision
Date	2026/10/30		1/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: Standard Saw Arbor Motor
Product code	: 14337393

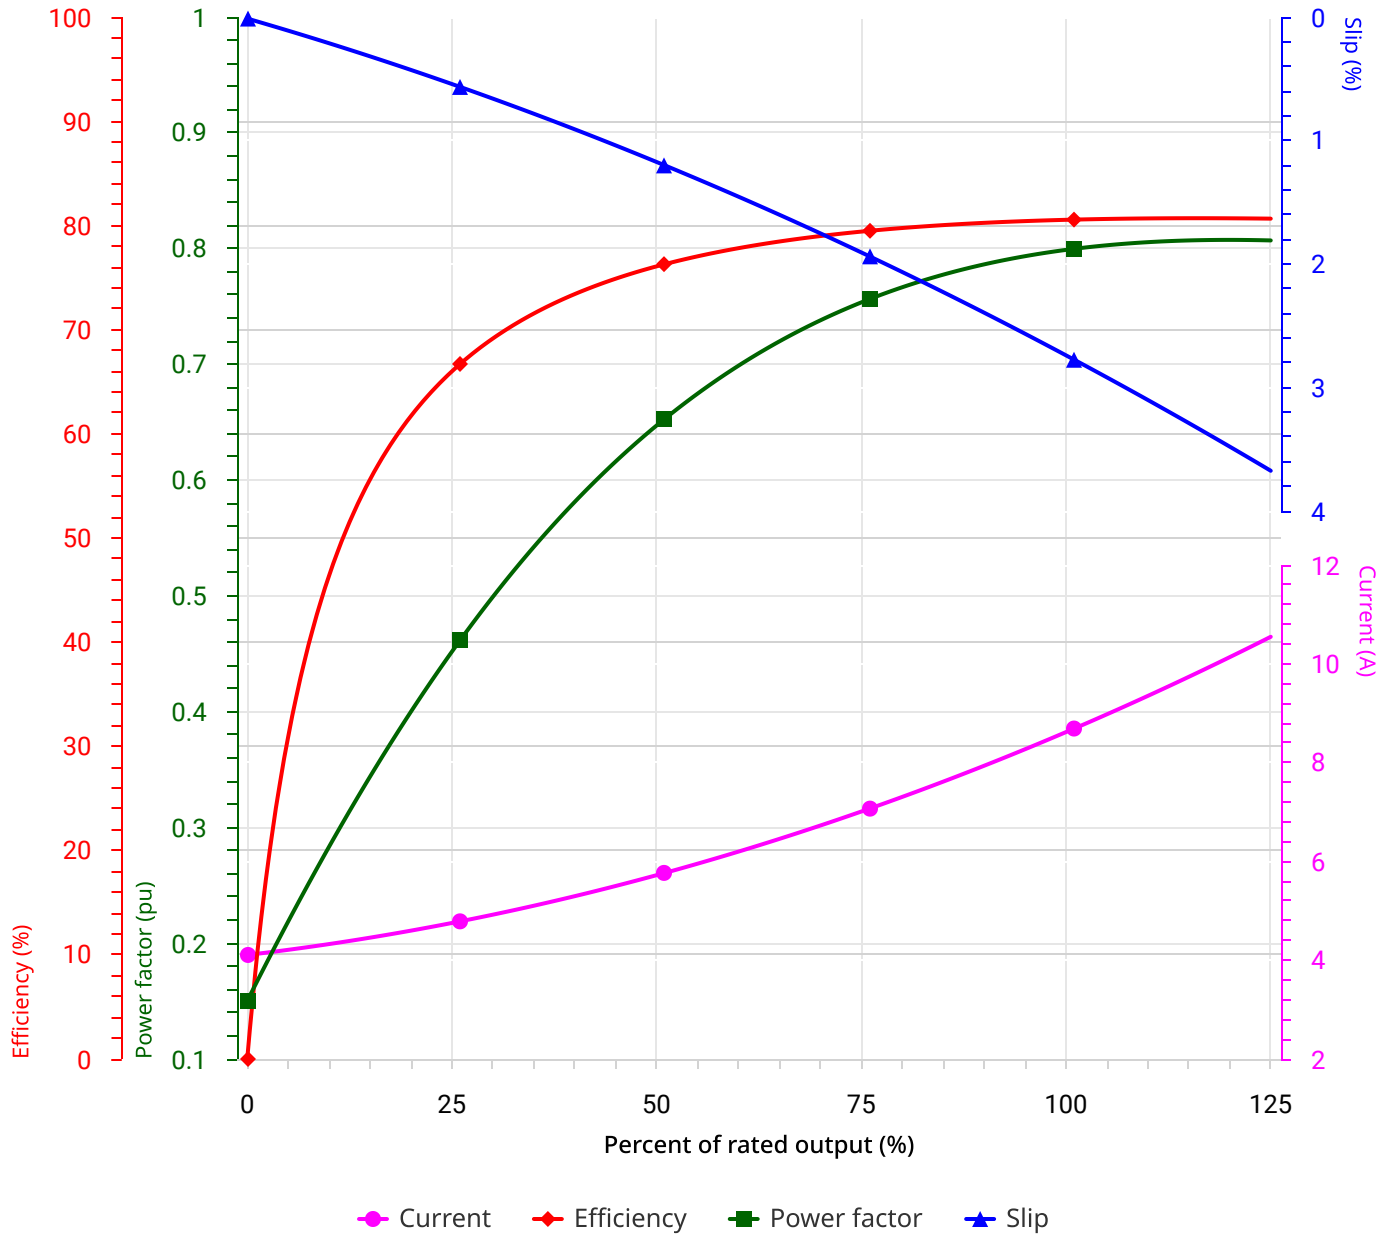

Performance	: 3 HP (2.2 kW) 208/230/460V 60Hz 2P 80S/MS

Rated current	: 9.49/8.58/4.29 A	Moment of inertia (J)	: 0.0032 kgm²
LRC	: 7.3 Code K	Duty cycle	: S6
Rated torque	: 0.622 kgfm	Insulation class	: F
Locked rotor torque	: 330 %	Service factor	: 1.00
Breakdown torque	: 370 %	Temperature rise	: 80 K
Rated speed	: 3500 rpm	Design	: N

Rev.	Changes Summary	Performed	Checked	Date
				2026/10/30

Performed by				
Checked by			Page	Revision
Date	2026/10/30		2/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.