

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel Jet Pump - C type Premium Efficiency Three-Phase Product code : 14337496

Frame	: W56C	Cooling method	: IC01 - ODP
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: CCW
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 10.8 kg
Design	: A	Moment of inertia (J)	: 0.0014 kgm ²

Output [HP]	1.5	1.5	1.5
Poles	2	2	2
Frequency [Hz]	60	50	50
Rated voltage [V]	230/460	190-220/380	415
Rated current [A]	4.22/2.11	4.86-4.20/2.43	2.39
L. R. Amperes [A]	37.1/18.6	38.4-33.2/19.2	21.3
LRC [A]	8.8x(Code L)	7.9x(Code K)	8.9x(Code M)
No load current [A]	2.40/1.20	2.40-2.07/1.20	1.50
Rated speed [RPM]	3450	2815	2850
Slip [%]	4.17	6.17	5.00
Rated torque [kgfm]	0	0	0
Locked rotor torque [%]	400	390	480
Breakdown torque [%]	430	310	380
Service factor		1.15	1.15
Temperature rise	80 K	80 K	80 K
Locked rotor time	23s (cold) 13s (hot)	18s (cold) 10s (hot)	16s (cold) 9s (hot)
Noise level ²	62.0 dB(A)	60.0 dB(A)	60.0 dB(A)
Efficiency (%)	25%		
	50%	78.5	80.0
	75%	82.5	81.0
	100%	84.0	82.0
Power Factor	25%		
	50%	0.59	0.65
	75%	0.72	0.77
	100%	0.78	0.84

Bearing type	: Drive end 6203 2RS Non drive end 6202 2RS	Foundation loads	
Sealing	: Without Without Bearing Seal Bearing Seal	Max. traction	: 41 kgf
Lubrication interval	: - -	Max. compression	: 52 kgf
Lubricant amount	: - -		
Lubricant type	: Mobil Polyrex EM		

Notes

USABLE @208V 4.67A SF 1.00 SFA 4.67A

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	25/09/2026			

Page 1 / 4
Revision

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel Jet Pump - C type
Premium Efficiency Three-Phase

Product code : 14337496

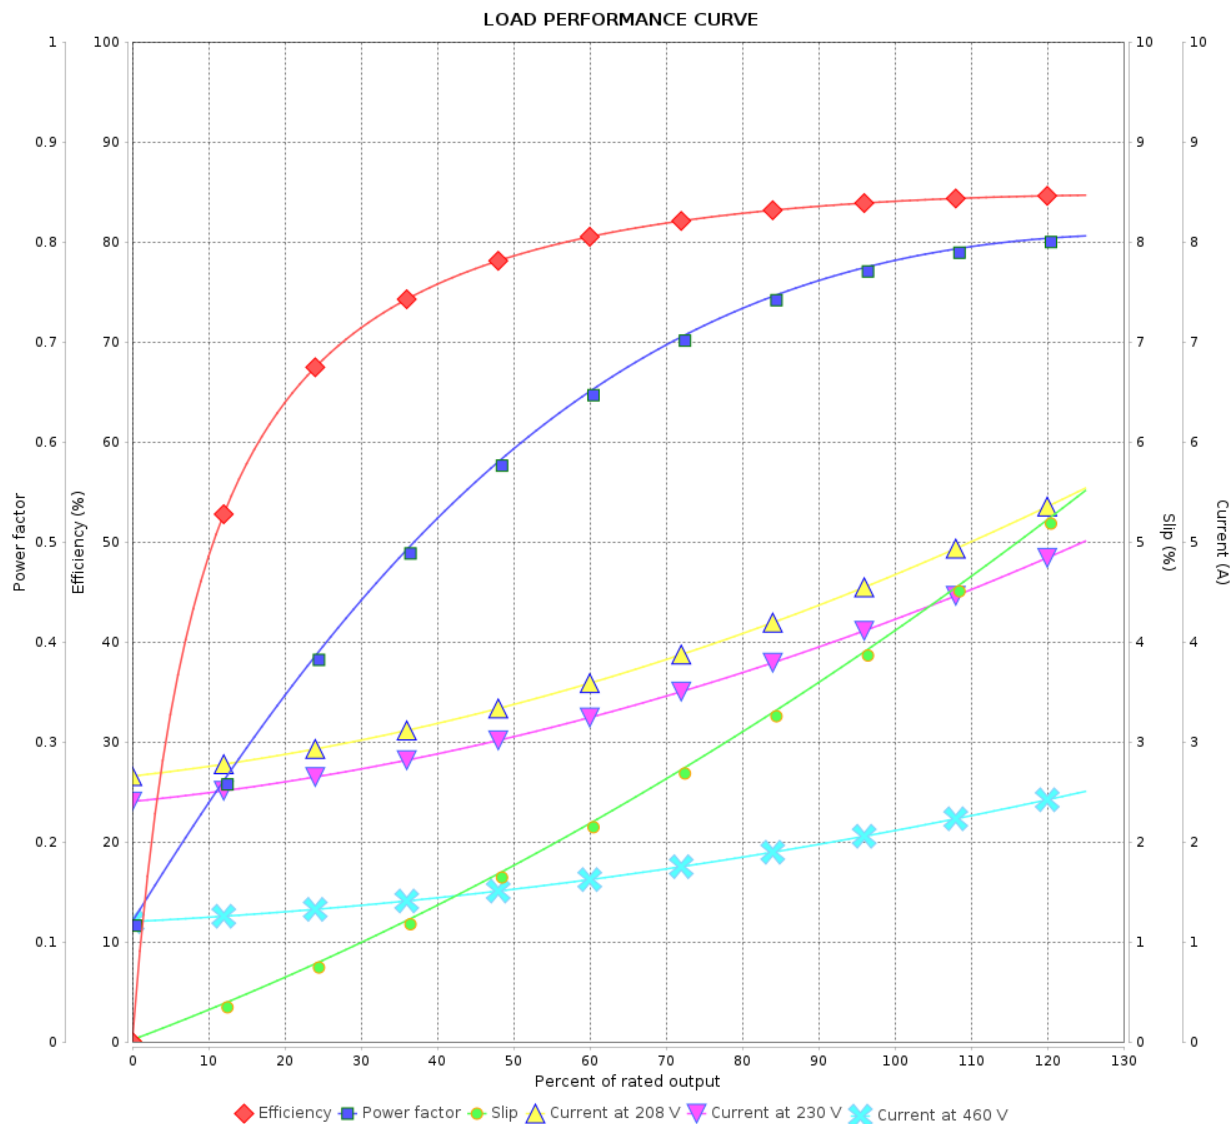

Performance : 230/460 V 60 Hz 2P

Rated current : 4.22/2.11 A
LRC : 8.8
Rated torque : 0 kgfm
Locked rotor torque : 400 %
Breakdown torque : 430 %
Rated speed : 3450 rpm

Moment of inertia (J) : 0.0014 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor :
Temperature rise : 80 K
Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 2 / 4Revision		
Checked by				
Date	25/09/2026			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel Jet Pump - C type
Premium Efficiency Three-Phase

Product code : 14337496

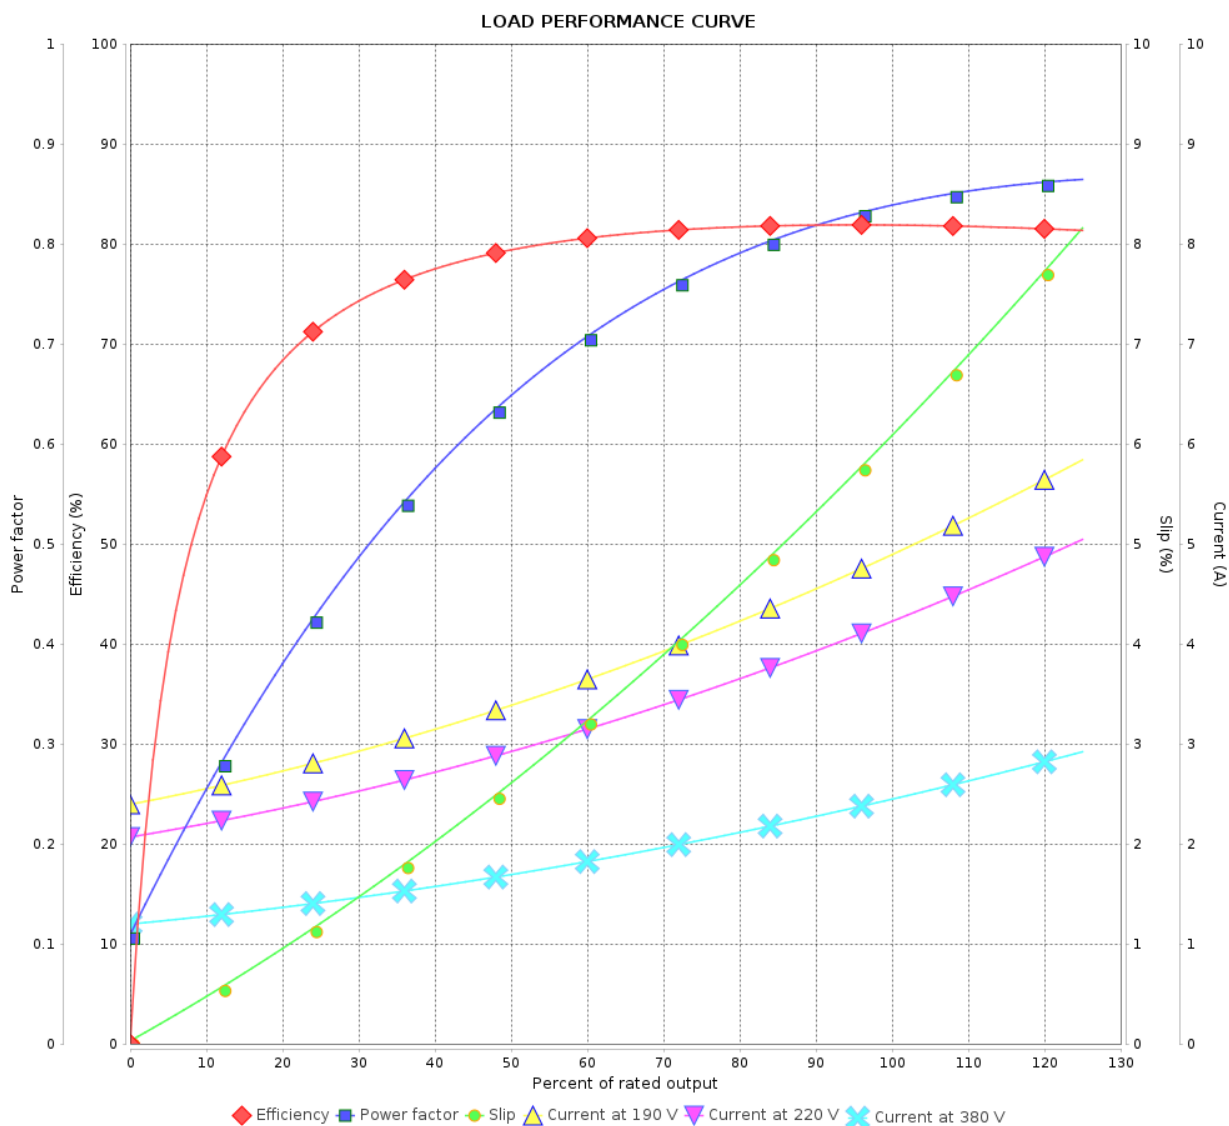

Performance : 190-220/380 V 50 Hz 2P

Rated current : 4.86-4.20/2.43 A
LRC : 7.9
Rated torque : 0 kgfm
Locked rotor torque : 390 %
Breakdown torque : 310 %
Rated speed : 2815 rpm

Moment of inertia (J) : 0.0014 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : A

Rev.	Changes Summary		Performed	Checked	Date
Performed by		Page 3 / 4Revision			
Checked by					
Date	25/09/2026				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel Jet Pump - C type
Premium Efficiency Three-Phase

Product code : 14337496

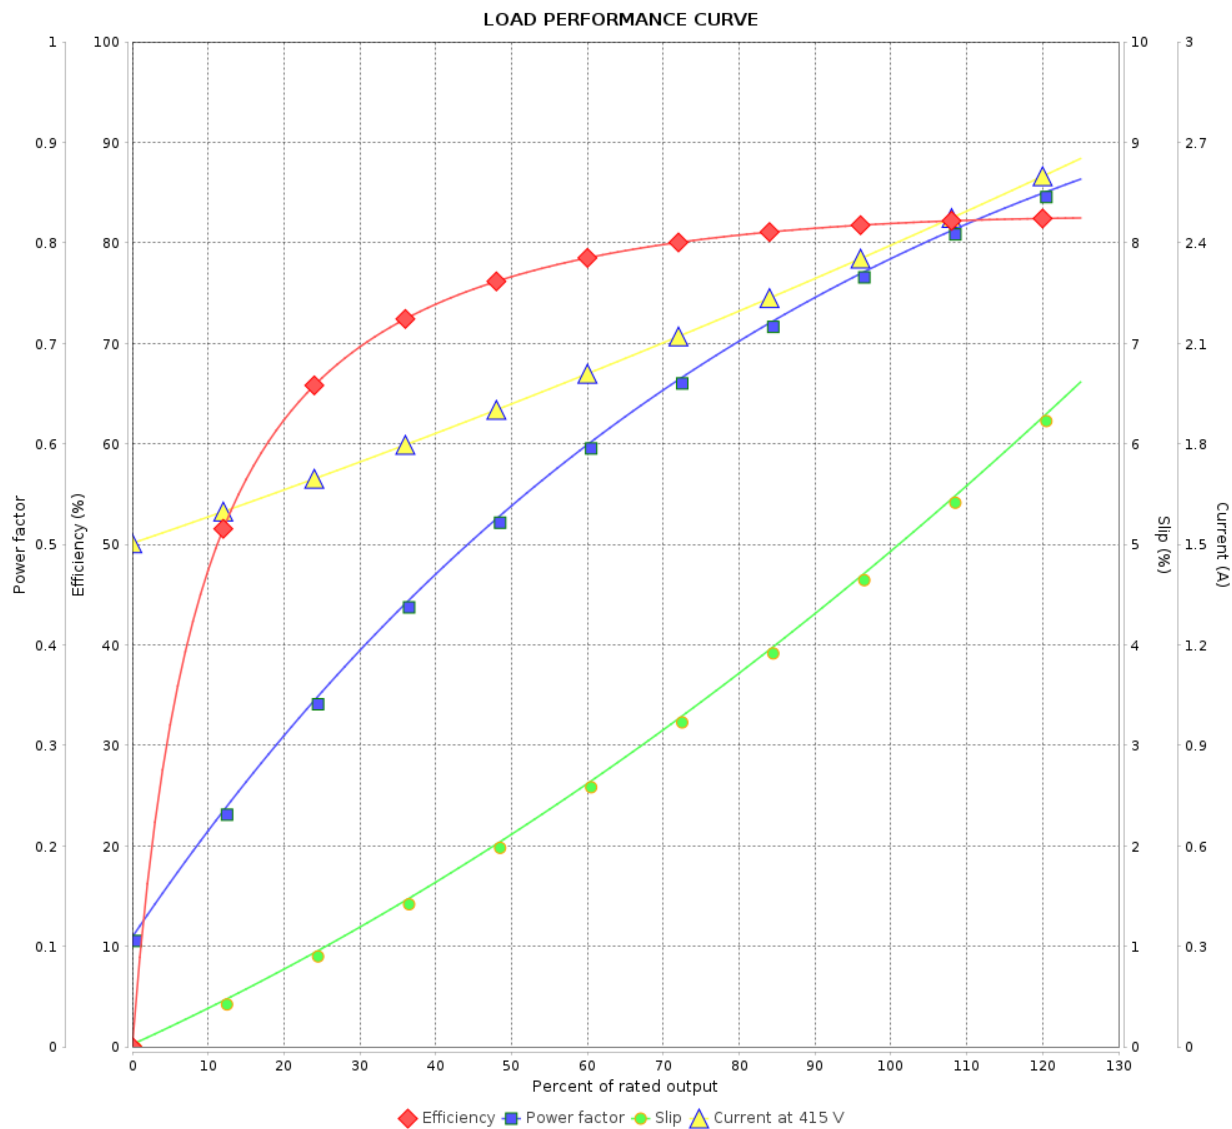

Performance : 415 V 50 Hz 2P

Rated current : 2.39 A
LRC : 8.9
Rated torque : 0 kgfm
Locked rotor torque : 480 %
Breakdown torque : 380 %
Rated speed : 2850 rpm

Moment of inertia (J) : 0.0014 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : A

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				4 / 4	
Date					