

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :					
Product line	: W21 Explosion Proof NEMA Premium Efficiency Three-Phase	Product code :	14338143		
Frame	: 143/5T	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 33.5 kg		
Protection degree	: IP55	Moment of inertia (J)	: 0.0023 kgm ²		
Design	: B				
Output [HP]	2	2	2	2	
Poles	2	2	2	2	
Frequency [Hz]	60	50	50	50	
Rated voltage [V]	230/460	380	400	415	
Rated current [A]	5.38/2.69	3.25	3.09	3.05	
L. R. Amperes [A]	49.5/24.7	22.8	23.2	24.4	
LRC [A]	9.2x(Code L)	7.0x(Code J)	7.5x(Code K)	8.0x(Code K)	
No load current [A]	2.40/1.20	1.10	1.20	1.30	
Rated speed [RPM]	3495	2860	2880	2890	
Slip [%]	2.92	4.67	4.00	3.67	
Rated torque [kgfm]	0.415	0.508	0.504	0.502	
Locked rotor torque [%]	370	270	310	340	
Breakdown torque [%]	420	290	330	360	
Service factor	1.15	1.00	1.00	1.00	
Temperature rise	80 K	80 K	80 K	80 K	
Locked rotor time	27s (cold) 15s (hot)	37s (cold) 21s (hot)	37s (cold) 21s (hot)	37s (cold) 21s (hot)	
Noise level ²	68.0 dB(A)	62.0 dB(A)	62.0 dB(A)	62.0 dB(A)	
Efficiency (%)	25%	78.4	81.1	82.1	81.0
	50%	80.0	81.5	82.5	81.5
	75%	84.0	82.5	84.5	84.5
	100%	85.5	82.5	84.5	84.5
Power Factor	25%	0.41	0.47	0.43	0.39
	50%	0.64	0.70	0.66	0.62
	75%	0.76	0.81	0.78	0.75
	100%	0.82	0.85	0.83	0.81
Bearing type	: <u>Drive end</u> 6205 2RS <u>Non drive end</u> 6204 2RS	Foundation loads			
Sealing	: Oil Seal Lip Seal	Max. traction	: 35 kgf		
Lubrication interval	: - -	Max. compression	: 68 kgf		
Lubricant amount	: - -				
Lubricant type	: Mobil Polyrex EM				
Notes USABLE @208V 5.95A SF 1.15 SFA 6.84A					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary	Performed	Checked	Date	
Performed by					
Checked by			Page	Revision	
Date	15/01/2024		1 / 6		

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		2 / 6	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W21 Explosion Proof NEMA Premium
Efficiency Three-Phase

Product code : 14338143

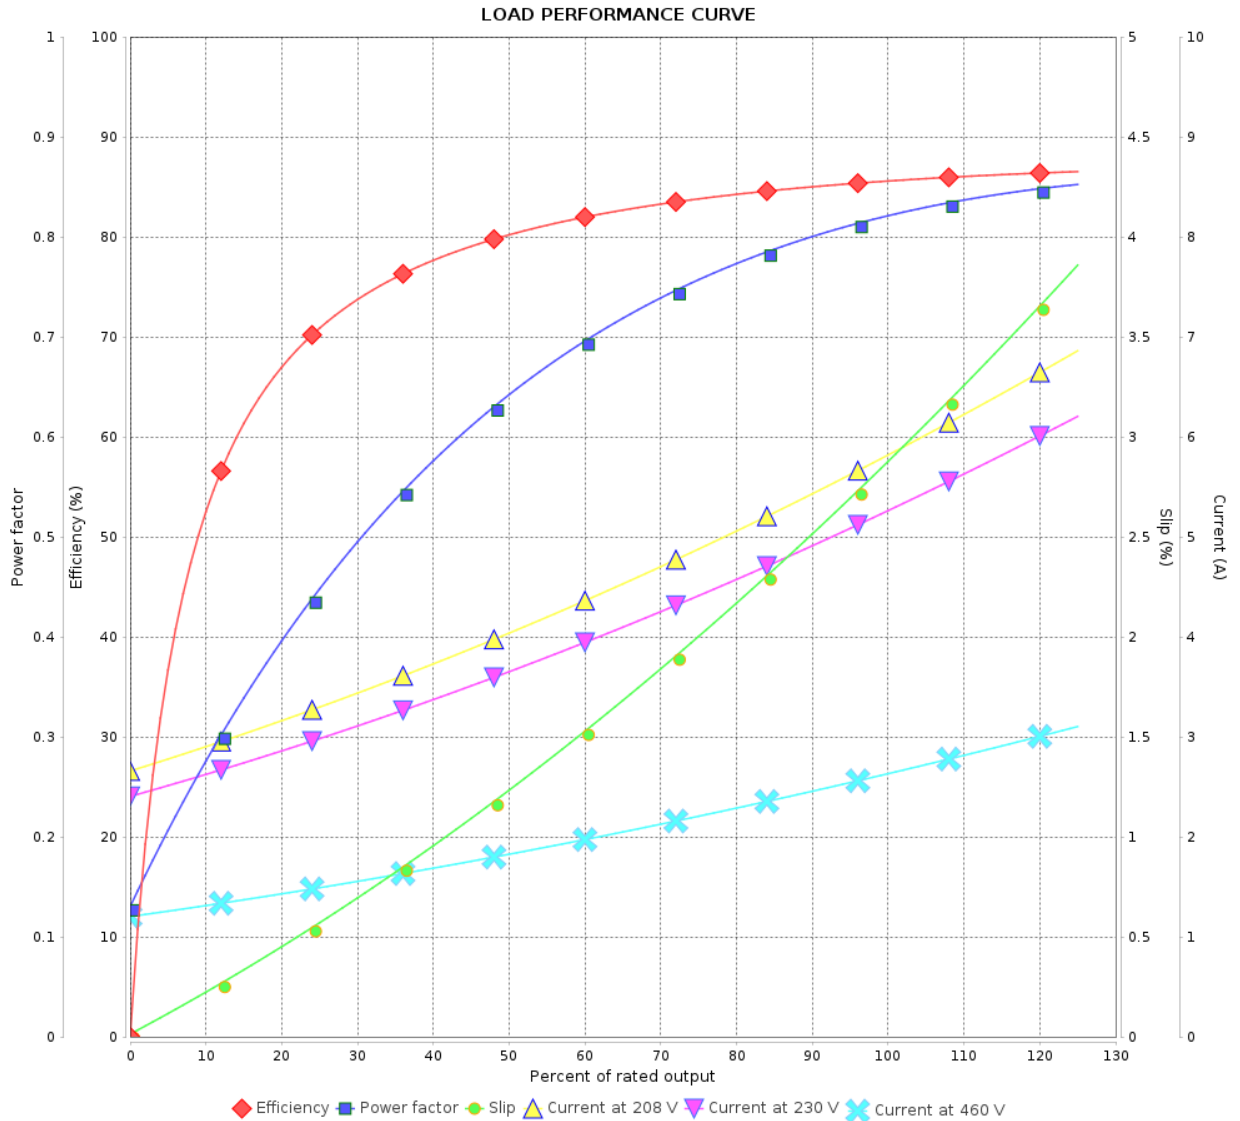

Performance : 230/460 V 60 Hz 2P

Rated current : 5.38/2.69 A
 LRC : 9.2
 Rated torque : 0.415 kgfm
 Locked rotor torque : 370 %
 Breakdown torque : 420 %
 Rated speed : 3495 rpm

Moment of inertia (J) : 0.0023 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 6		
Date		15/01/2024		

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W21 Explosion Proof NEMA Premium
Efficiency Three-Phase

Product code : 14338143

LOAD PERFORMANCE CURVE

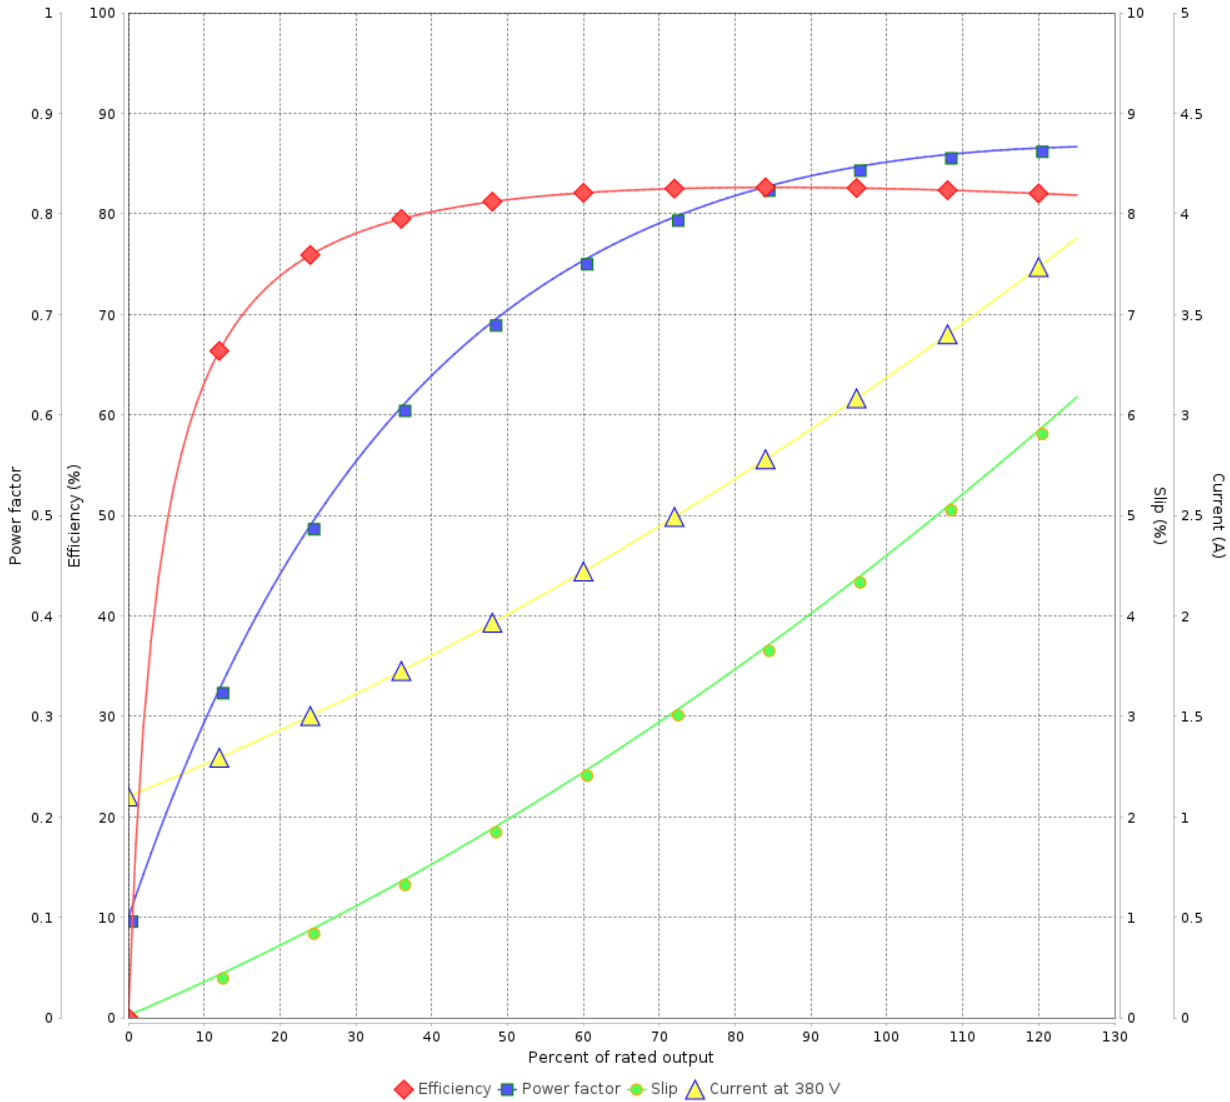

Performance : 380 V 50 Hz 2P IE2

Rated current : 3.25 A
LRC : 7.0
Rated torque : 0.508 kgfm
Locked rotor torque : 270 %
Breakdown torque : 290 %
Rated speed : 2860 rpm

Moment of inertia (J) : 0.0023 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 Explosion Proof NEMA Premium
Efficiency Three-Phase

Product code : 14338143

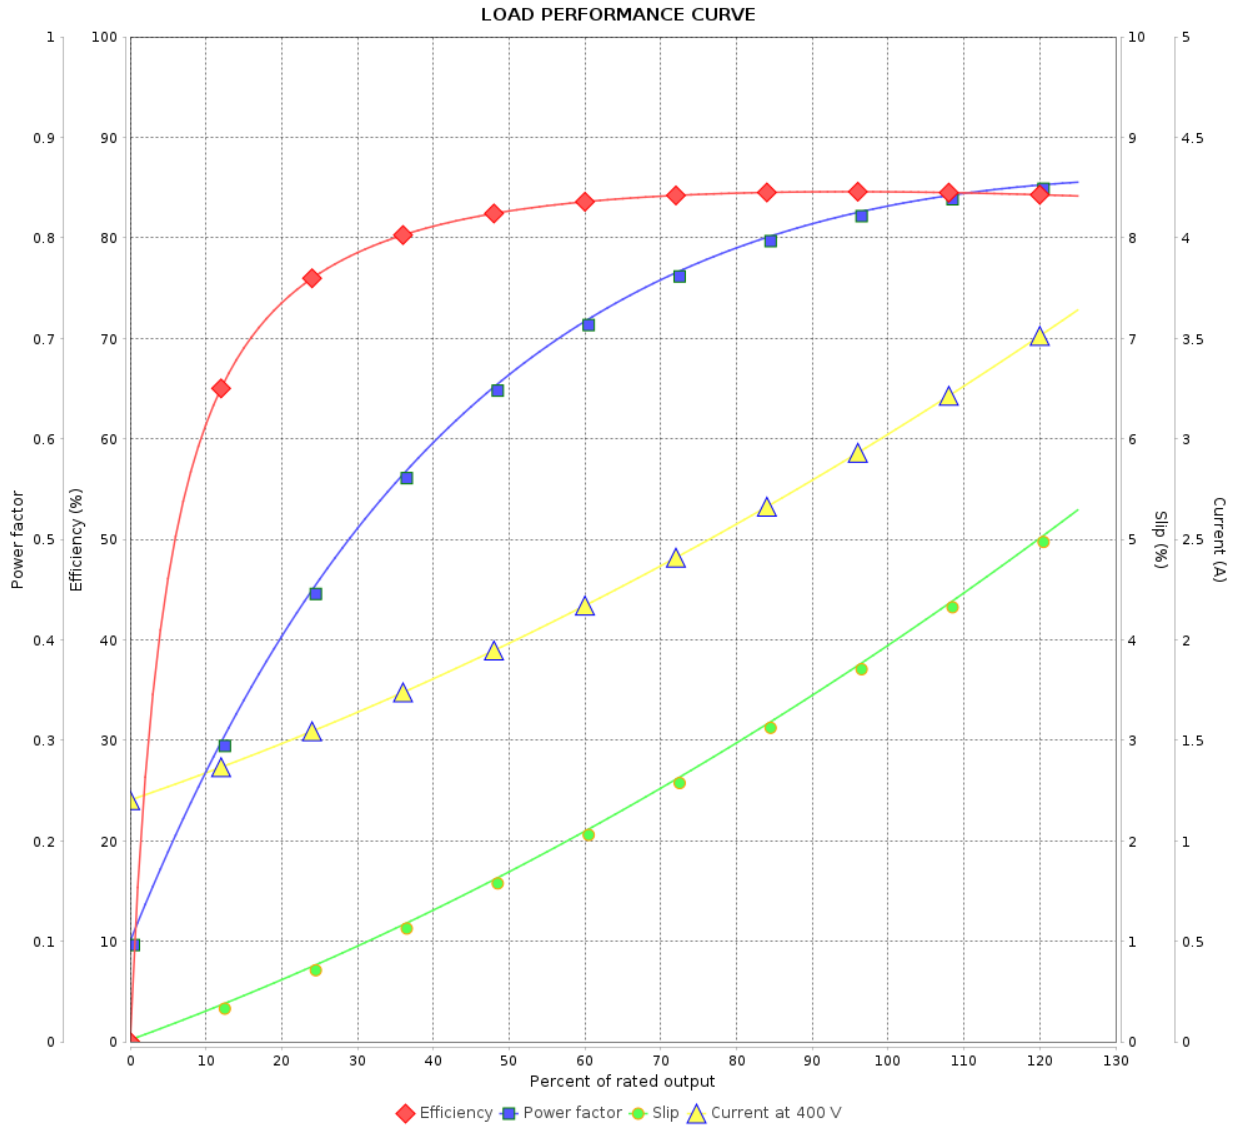

Performance : 400 V 50 Hz 2P IE3

Rated current : 3.09 A
LRC : 7.5
Rated torque : 0.504 kgfm
Locked rotor torque : 310 %
Breakdown torque : 330 %
Rated speed : 2880 rpm

Moment of inertia (J) : 0.0023 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W21 Explosion Proof NEMA Premium
Efficiency Three-Phase

Product code : 14338143

LOAD PERFORMANCE CURVE

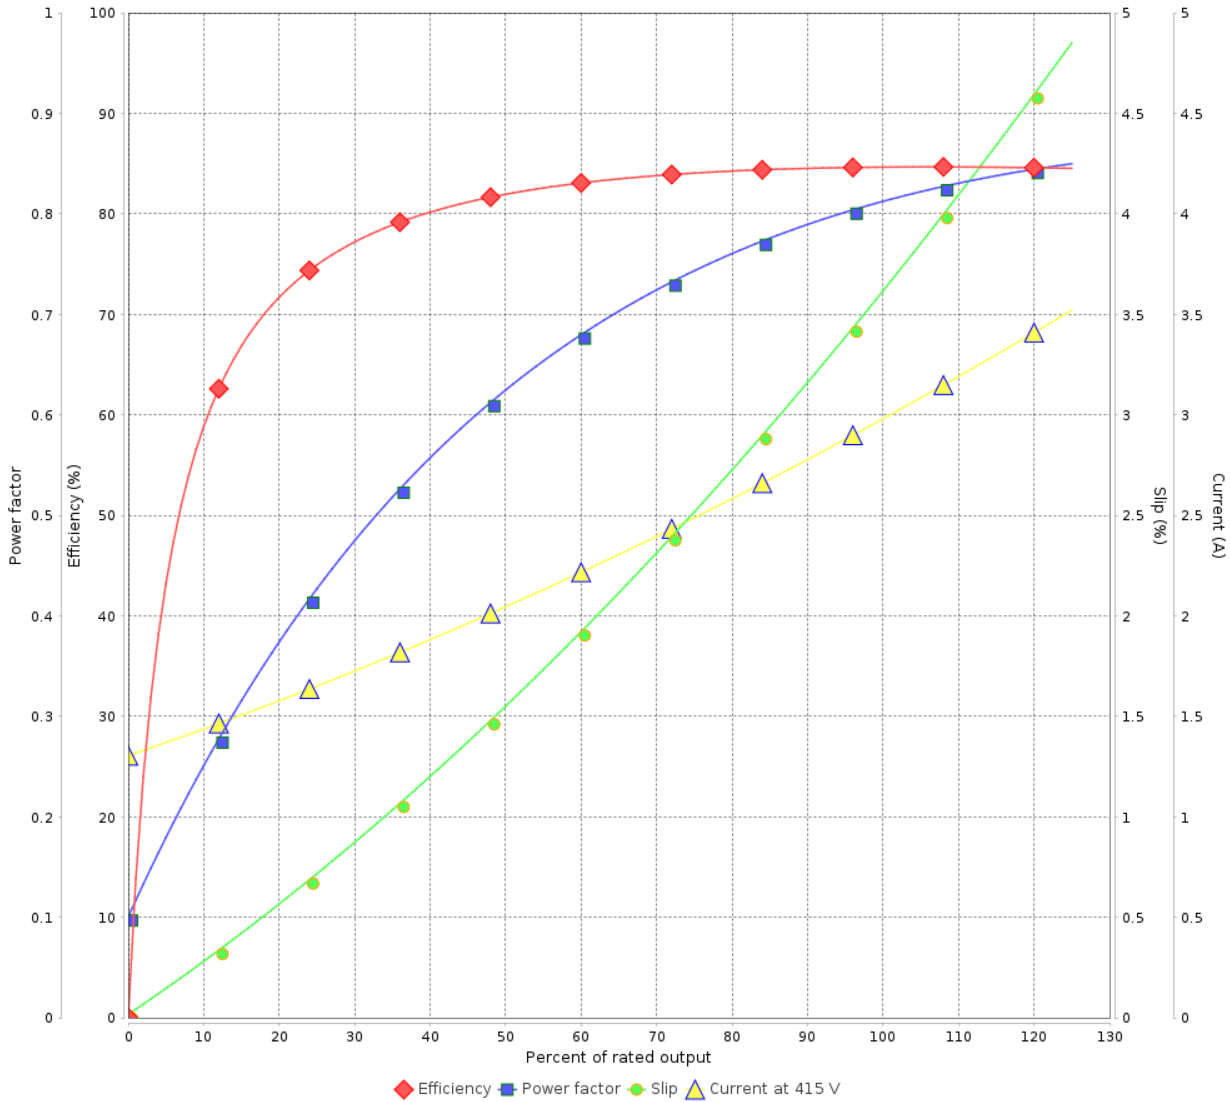

Performance : 415 V 50 Hz 2P IE3

Rated current : 3.05 A
LRC : 8.0
Rated torque : 0.502 kgfm
Locked rotor torque : 340 %
Breakdown torque : 360 %
Rated speed : 2890 rpm

Moment of inertia (J) : 0.0023 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				