

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :					
Product line		: W21 Explosion Proof NEMA Premium Efficiency Three-Phase		Product code : 14407015	
Frame	: 254T		Locked rotor time	: 55s (cold) 31s (hot)	
Output	: 15 HP (11 kW)		Temperature rise	: 80 K	
Poles	: 2		Duty cycle	: Cont.(S1)	
Frequency	: 60 Hz		Ambient temperature	: -20°C to +40°C	
Rated voltage	: 575 V		Altitude	: 1000 m.a.s.l.	
Rated current	: 13.9 A		Protection degree	: IP55	
L. R. Amperes	: 94.7 A		Cooling method	: IC411 - TEFC	
LRC	: 6.8x(Code G)		Mounting	: F-1	
No load current	: 4.80 A		Rotation ¹	: Both (CW and CCW)	
Rated speed	: 3540 rpm		Noise level ²	: 75.0 dB(A)	
Slip	: 1.67 %		Starting method	: Direct On Line	
Rated torque	: 3.08 kgfm		Approx. weight ³	: 146 kg	
Locked rotor torque	: 200 %				
Breakdown torque	: 270 %				
Insulation class	: F				
Service factor	: 1.15				
Moment of inertia (J)	: 0.0500 kgm ²				
Design	: B				
Output	25%	50%	75%	100%	
Efficiency (%)	89.4	90.0	90.5	91.0	
Power Factor	0.49	0.74	0.83	0.87	
Foundation loads					
Max. traction : 57 kgf					
Max. compression : 203 kgf					
		<u>Drive end</u>	<u>Non drive end</u>		
Bearing type	:	6309 C3	6209 C3		
Sealing	:	Oil Seal	Lip Seal		
Lubrication interval	:	15797 h	18447 h		
Lubricant amount	:	13 g	9 g		
Lubricant type	:	Mobil Polyrex EM			
Notes:					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by					
Date	15/01/2024			Page	Revision
				1 / 3	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		2 / 3	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 Explosion Proof NEMA Premium
Efficiency Three-Phase

Product code : 14407015

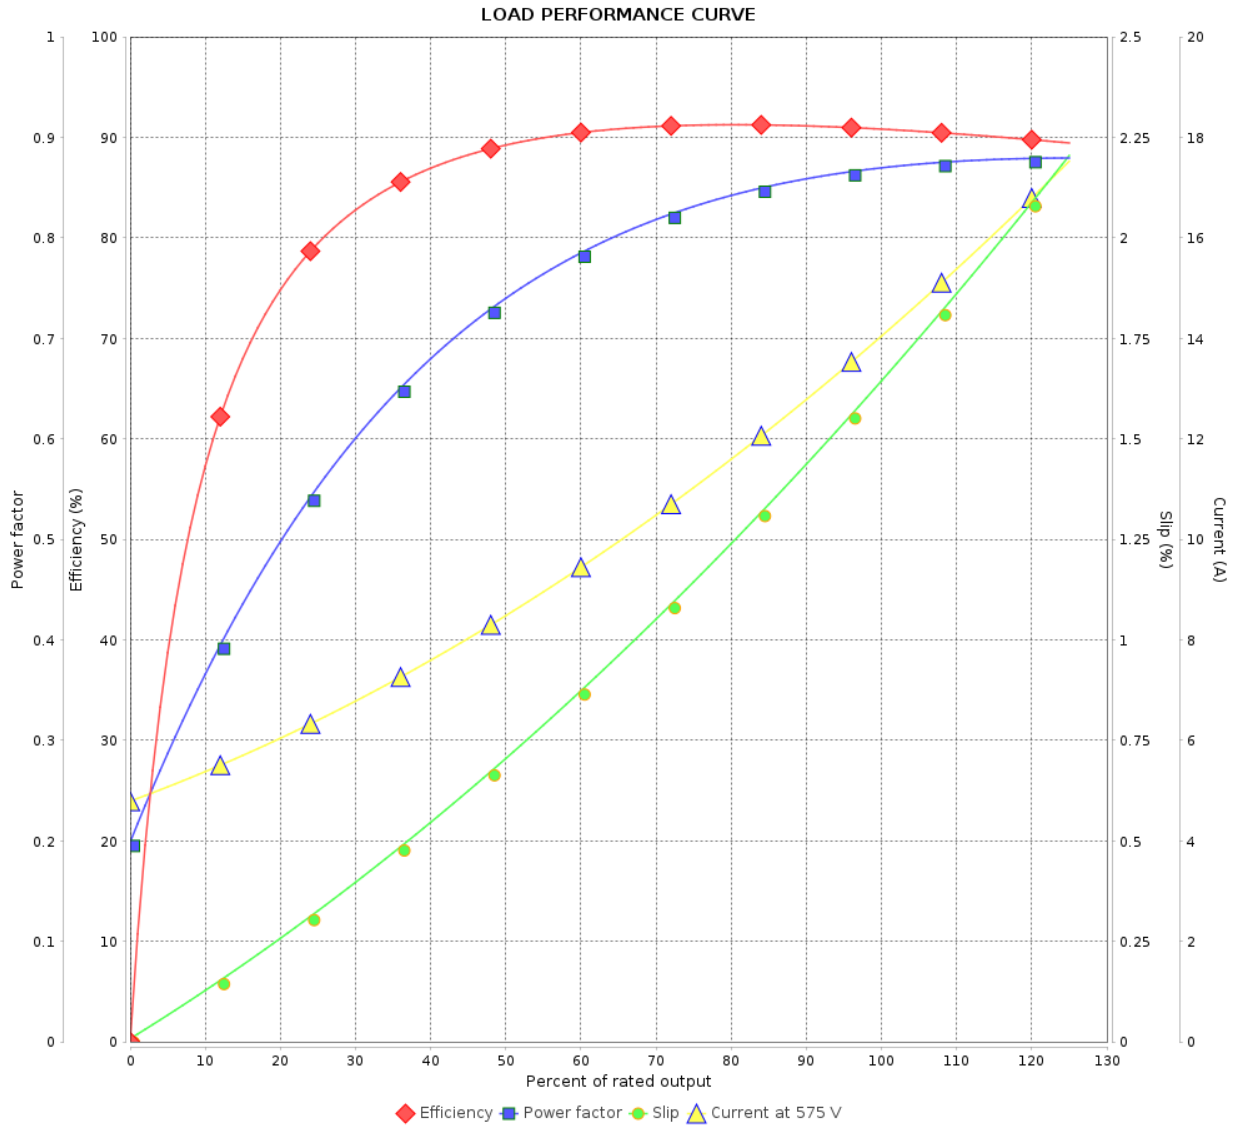

Performance : 575 V 60 Hz 2P

Rated current : 13.9 A
 LRC : 6.8
 Rated torque : 3.08 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 270 %
 Rated speed : 3540 rpm

Moment of inertia (J) : 0.0500 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 3		
Date		15/01/2024		