

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :							
Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase Product code : 14433680							
Frame	: 213/5T			Locked rotor time	: 32s (cold) 18s (hot)		
Output	: 10 HP (7.5 kW)			Temperature rise	: 80 K		
Poles	: 2			Duty cycle	: Cont.(S1)		
Frequency	: 60 Hz			Ambient temperature	: -20°C to +40°C		
Rated voltage	: 575 V			Altitude	: 1000 m.a.s.l.		
Rated current	: 9.28 A			Protection degree	: IP55		
L. R. Amperes	: 66.8 A			Cooling method	: IC411 - TEFC		
LRC	: 7.2x(Code H)			Mounting	: F-1		
No load current	: 2.88 A			Rotation ¹	: Both (CW and CCW)		
Rated speed	: 3530 rpm			Noise level ²	: 68.0 dB(A)		
Slip	: 1.94 %			Starting method	: Direct On Line		
Rated torque	: 2.06 kgfm			Approx. weight ³	: 84.1 kg		
Locked rotor torque	: 220 %						
Breakdown torque	: 290 %						
Insulation class	: F						
Service factor	: 1.25						
Moment of inertia (J)	: 0.0268 kgm ²						
Design	: B						
Output	50%	75%	100%	Foundation loads			
Efficiency (%)	89.5	90.2	90.2	Max. traction	: 68 kgf		
Power Factor	0.79	0.87	0.90	Max. compression	: 152 kgf		
Losses at normative operating points (speed;torque), in percentage of rated output power							
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)	
10.7	8.7	7.8	5.2	3.3	2.1	1.3	
		<u>Drive end</u>		<u>Non drive end</u>			
Bearing type	:	6308 ZZ		6207 ZZ			
Sealing	:	V'Ring		Lip Seal			
Lubrication interval	:	-		-			
Lubricant amount	:	-		-			
Lubricant type	:	Mobil Polyrex EM					
Notes:							
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date	
Performed by							
Checked by					Page	Revision	
Date	15/01/2024				1 / 3		

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Brake information

Voltage: 525-575 V
Brake Torque: 8.15 kgfm

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		2 / 3	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase Product code : 14433680

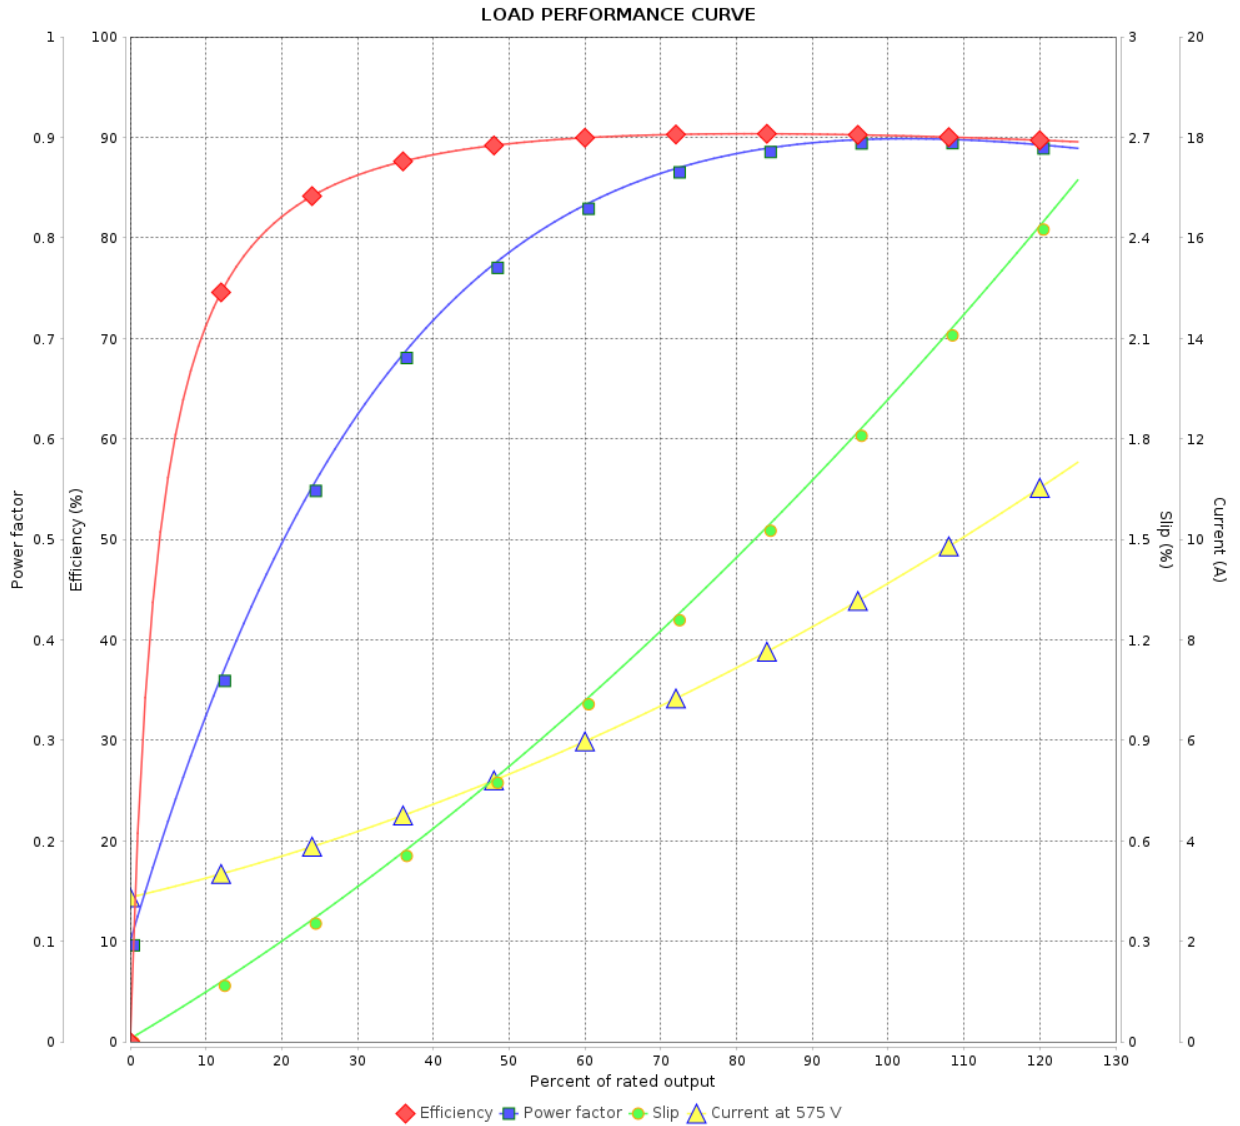

Performance : 575 V 60 Hz 2P

Rated current	: 9.28 A	Moment of inertia (J)	: 0.0268 kgm ²
LRC	: 7.2	Duty cycle	: Cont.(S1)
Rated torque	: 2.06 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.25
Breakdown torque	: 290 %	Temperature rise	: 80 K
Rated speed	: 3530 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 3		
Date	15/01/2024			