

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Close Coupled Pump NEMA Premium Efficiency Three-Phase Product code : 14433961

Frame	: 326JM	Locked rotor time	: 43s (cold) 24s (hot)
Output	: 60 HP (45 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 56.8 A	Protection degree	: IP23
L. R. Amperes	: 341 A	Cooling method	: IC01 - ODP
LRC	: 6.0x(Code G)	Mounting	: W-6
No load current	: 17.2 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 3560 rpm	Noise level ²	: 75.0 dB(A)
Slip	: 1.11 %	Starting method	: Direct On Line
Rated torque	: 12.2 kgfm	Approx. weight ³	: 242 kg
Locked rotor torque	: 220 %		
Breakdown torque	: 229 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.1839 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	93.0	93.6	93.6	Max. traction	: 233 kgf
Power Factor	0.77	0.84	0.85	Max. compression	: 475 kgf

	Drive end	Non drive end
Bearing type	: 6312 Z C3	: 6212 Z C3
Sealing	: Without Bearing Seal	: Without Bearing Seal
Lubrication interval	: 9829 h	: 12143 h
Lubricant amount	: 21 g	: 13 g
Lubricant type	: Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/01/2024		1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Close Coupled Pump NEMA Premium
Efficiency Three-Phase

Product code : 14433961

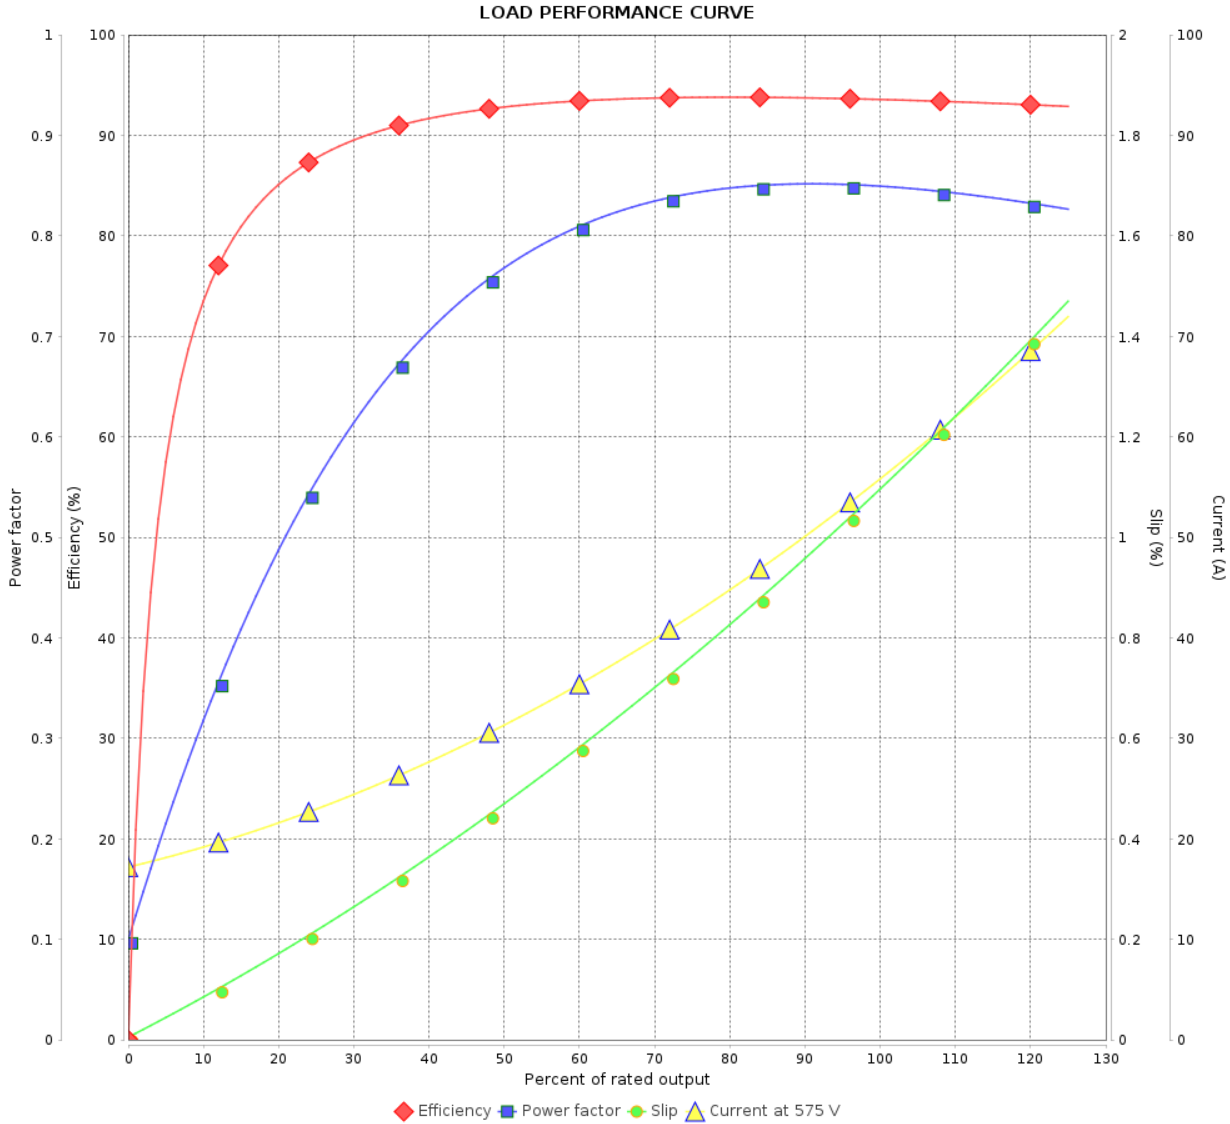

Performance : 575 V 60 Hz 2P

Rated current : 56.8 A
 LRC : 6.0
 Rated torque : 12.2 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 229 %
 Rated speed : 3560 rpm

Moment of inertia (J) : 0.1839 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		2 / 2		
Date		14/01/2024		