DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: Standard Saw Arbor Motor
Product code	: 14443288

Frame	: 80M/MS	Locked rotor time	: 7 s (hot) 13 s (cold)
Output	: 5 HP (3.7 kW)	Temperature rise[4]	: 80 K
Poles	: 2	Duty cycle	: S6
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l
Rated current	: 5.32 A	Protection degree	: IP54
L. R. Amperes	: 42.5 A	Cooling method	: IC411 - TEFC
LRC	: 8.0 Code K	Mounting	: B3R(D)
No load current	: 2.30 A	Rotation[1]	: Clockwise
Rated speed	: 3470 rpm	Noise level[2]	: 62 dB(A)
Slip	: 3.61 %	Starting method	: Direct On Line
Rated torque	: 1.05 kgfm	Approx. weight[3]	: 48.0 kg
Locked rotor torque	: 340 %	Design	: N
Pull up torque	: 285 %		
Breakdown torque	: 410 %		
Insulation class	: F		
Service factor	: 1.00		
Moment of inertia (J)	: 0.0041 kgm²		

Output	Start	50%	75%	100%
Efficiency (%)	-	82.0	84.5	85.0
Power Factor	0.74	0.66	0.77	0.82

	Load type	: -
	Load torque	: -
	Load inertia (J=GD²/4)	: -

	Drive end	Non drive end
Bearing type	6307-ZZ	6207-ZZ
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	MOBIL POLYREX EM	

Foundation loads	
Max. traction	: 65 kgf
Max. compression	: 113 kgf

Notes:

Standards

Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Performed	Checked	Date
				2026/10/28


Performed by				
Checked by			Page	Revision
Date	2026/10/28		1/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: Standard Saw Arbor Motor
Product code	: 14443288

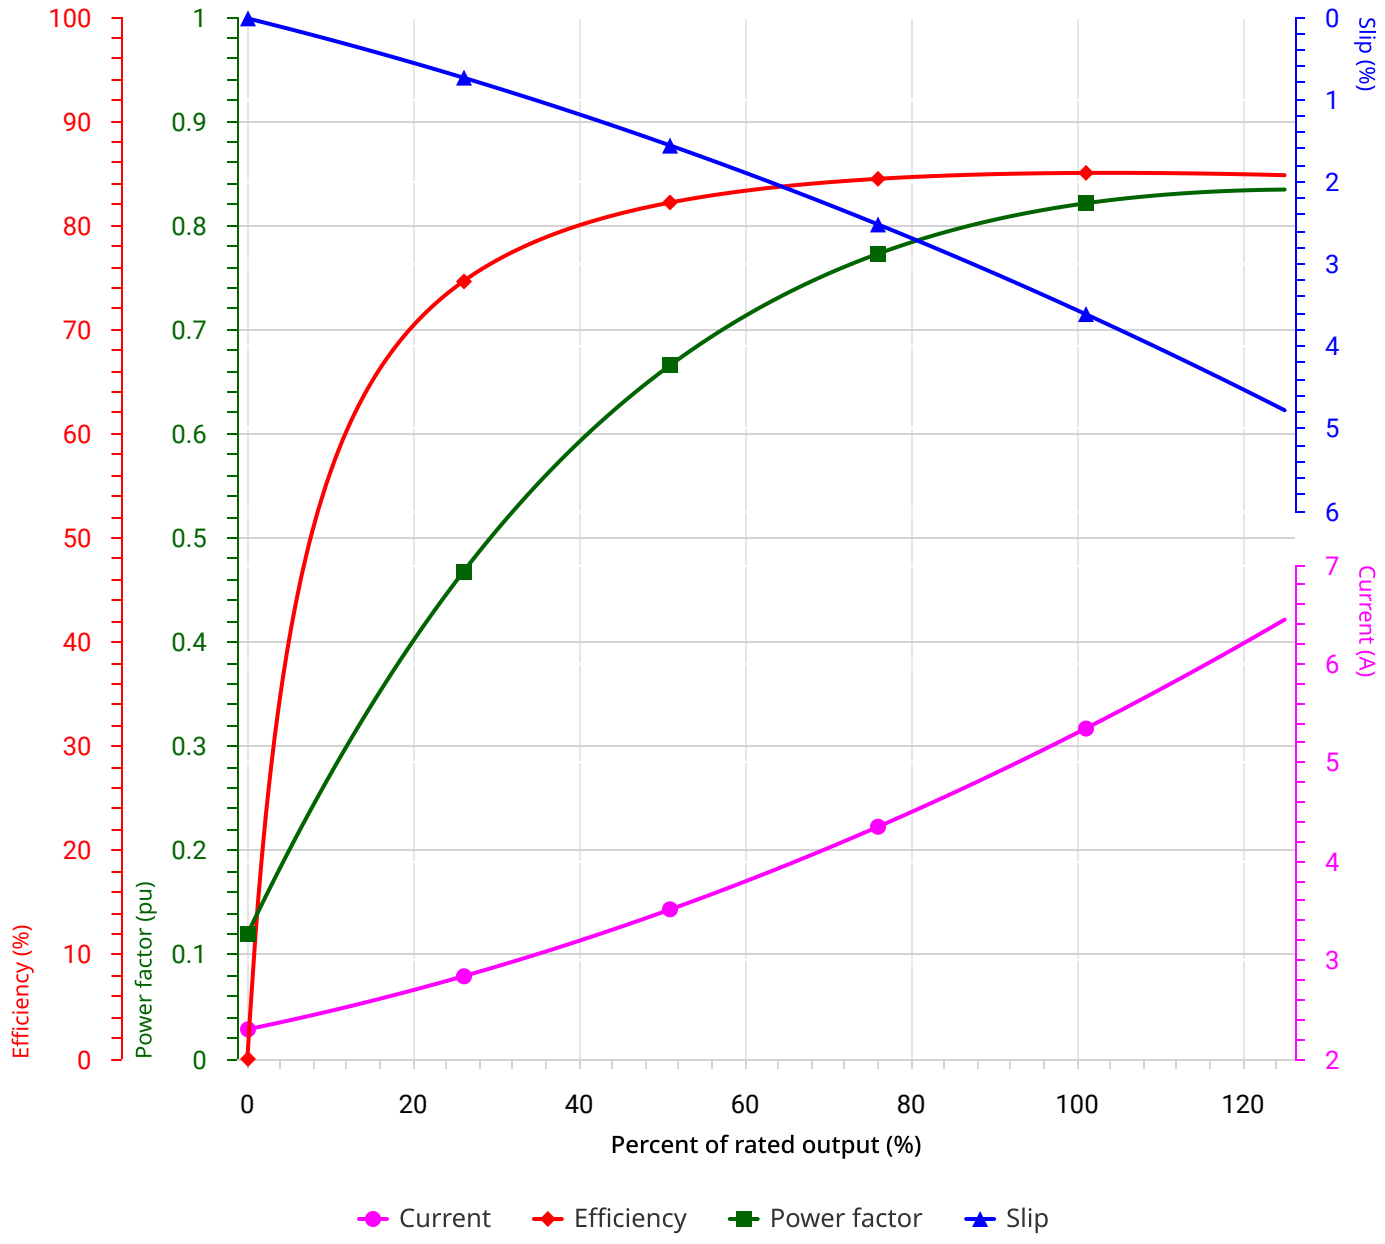

Performance	: 5 HP (3.7 kW) 575V 60Hz 2P 80M/MS		
Rated current	: 5.32 A	Moment of inertia (J)	: 0.0041 kgm²
LRC	: 8.0 Code K	Duty cycle	: S6
Rated torque	: 1.05 kgfm	Insulation class	: F
Locked rotor torque	: 340 %	Service factor	: 1.00
Breakdown torque	: 410 %	Temperature rise	: 80 K
Rated speed	: 3470 rpm	Design	: N

Rev.	Changes Summary	Performed	Checked	Date
				2026/10/28

Performed by				
Checked by			Page	Revision
Date	2026/10/28		2/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.