

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel Jet Pump - C type Premium Efficiency Three-Phase Product code : 14453253

Frame	: W56C	Locked rotor time	: 32s (cold) 18s (hot)
Output	: 0.75 HP (0.55 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 0.944 A	Cooling method	: IC01 - ODP
L. R. Amperes	: 7.36 A	Mounting	: F-1
LRC	: 7.8x(Code L)	Rotation ¹	: CCW
No load current	: 0.640 A	Noise level ²	: 62.0 dB(A)
Rated speed	: 3450 rpm	Vibration	: A
Slip	: 4.17 %	Starting method	: Direct On Line
Rated torque	: 0 kgfm	Approx. weight ³	: 7.3 kg
Locked rotor torque	: 370 %		: 207N (ISO 12944 - C2)
Breakdown torque	: 400 %		: Munsell N 1 - Matte
Insulation class	: F		
Service factor	: 1.50		
Moment of inertia (J)	: 0.0008 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	68.0	72.0	76.8	Max. traction	: 16 kgf
Power Factor	0.57	0.69	0.76	Max. compression	: 24 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6203 2RS	6202 2RS
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 1 / 2		
Checked by				
Date	05/10/2026			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel Jet Pump - C type
Premium Efficiency Three-Phase

Product code : 14453253

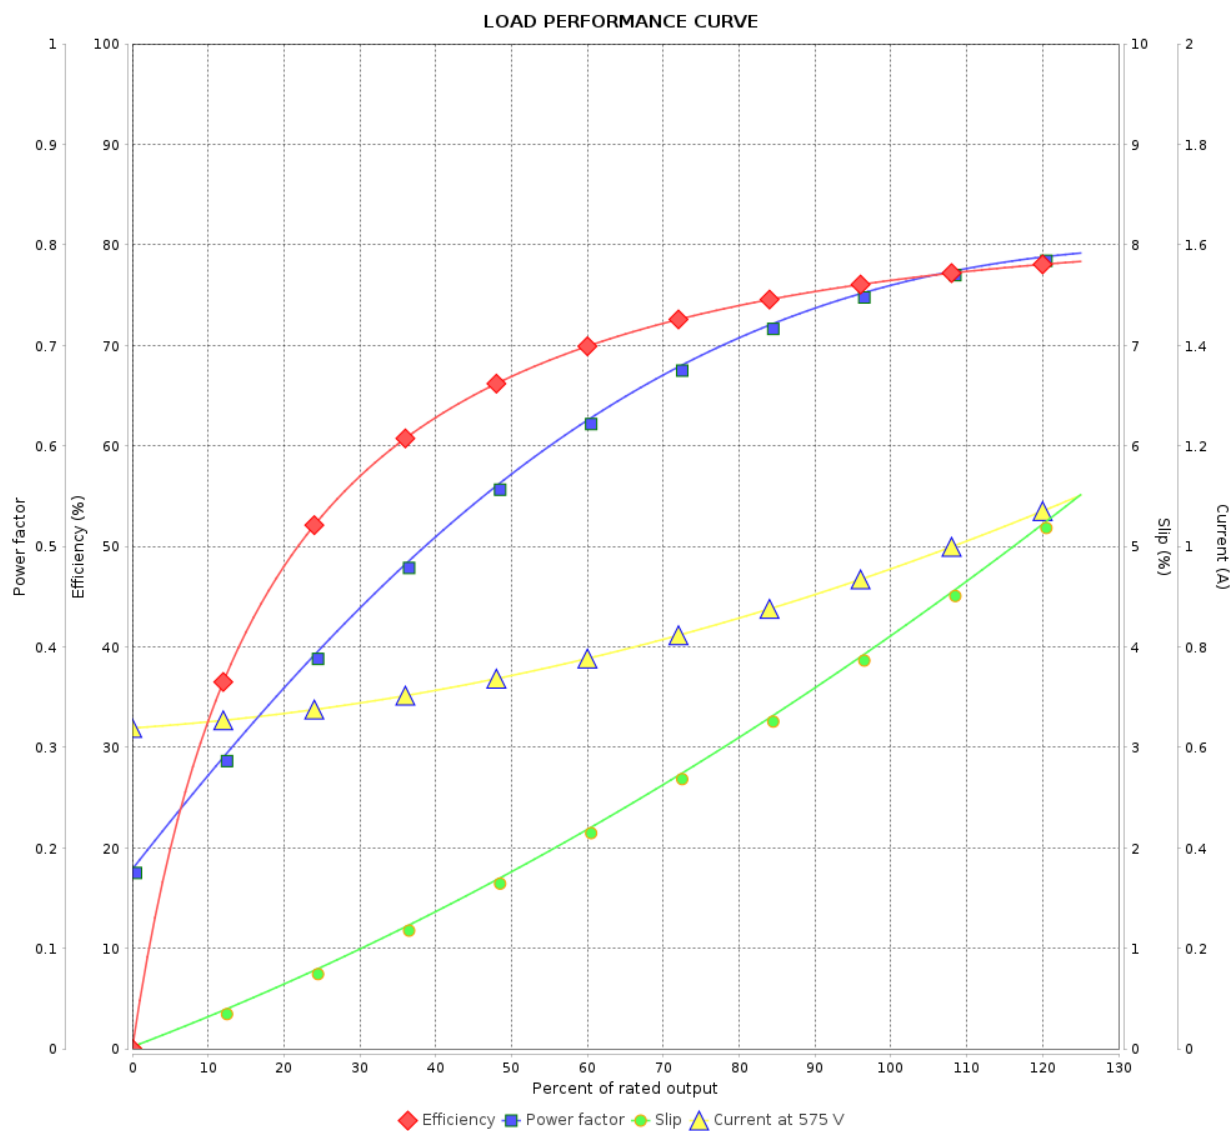

Performance : 575 V 60 Hz 2P

Rated current : 0.944 A
LRC : 7.8
Rated torque : 0 kgfm
Locked rotor torque : 370 %
Breakdown torque : 400 %
Rated speed : 3450 rpm

Moment of inertia (J) : 0.0008 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.50
Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 2 / 2Revision		
Checked by				
Date	05/10/2026			