

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :					
Product line	: W22 Close Coupled Pump JP NEMA Premium Efficiency Three-Phase	Product code :	14463821		
Frame	: 254/6JP	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 136 kg		
Protection degree	: IP55	Moment of inertia (J)	: 0.1652 kgm ²		
Design	: B				
Output [HP]	7.5	7.5	7.5	7.5	
Poles	6	6	6	6	
Frequency [Hz]	60	50	50	50	
Rated voltage [V]	230/460	380	400	415	
Rated current [A]	19.0/9.48	11.4	11.0	10.7	
L. R. Amperes [A]	129/64.5	59.3	63.8	66.3	
LRC [A]	6.8x(Code H)	5.2x(Code F)	5.8x(Code G)	6.2x(Code H)	
No load current [A]	9.00/4.50	4.50	4.75	4.95	
Rated speed [RPM]	1178	970	975	975	
Slip [%]	1.83	3.00	2.50	2.50	
Rated torque [kgfm]	4.62	5.61	5.58	5.58	
Locked rotor torque [%]	250	170	200	220	
Breakdown torque [%]	300	220	240	260	
Service factor	1.25	1.00	1.15	1.15	
Temperature rise	80 K	80 K	80 K	80 K	
Locked rotor time	54s (cold) 30s (hot)	48s (cold) 27s (hot)	48s (cold) 27s (hot)	48s (cold) 27s (hot)	
Noise level ²	59.0 dB(A)	57.0 dB(A)	57.0 dB(A)	57.0 dB(A)	
Efficiency (%)	25%				
	50%	89.5	87.5	87.5	
	75%	90.2	88.0	88.0	
	100%	91.0	88.0	88.0	
Power Factor	25%				
	50%	0.63	0.70	0.66	
	75%	0.74	0.79	0.77	
	100%	0.80	0.83	0.82	
Losses at normative operating points (speed;torque), in percentage of rated output power					
Losses (%)	P1 (0,9;1,0)	9.6	9.6	9.6	9.6
	P2 (0,5;1,0)	8.0	8.0	8.0	8.0
	P3 (0,25;1,0)	7.4	7.4	7.4	7.4
	P4 (0,9;0,5)	5.1	5.1	5.1	5.1
	P5 (0,5;0,5)	3.4	3.4	3.4	3.4
	P6 (0,5;0,25)	2.4	2.4	2.4	2.4
	P7 (0,25;0,25)	1.7	1.7	1.7	1.7
Bearing type	: Drive end 6309 C3 Non drive end 6209 C3	Foundation loads			
Sealing	: V'Ring V'Ring	Max. traction	: 160 kgf		
Lubrication interval	: 20000 h 20000 h	Max. compression	: 296 kgf		
Lubricant amount	: 13 g 9 g				
Lubricant type	: Mobil Polyrex EM				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary	Performed	Checked	Date	
Performed by					
Checked by			Page	Revision	
Date	14/01/2024		1 / 6		

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/01/2024		2 / 6	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JP NEMA
Premium Efficiency Three-Phase

Product code : 14463821

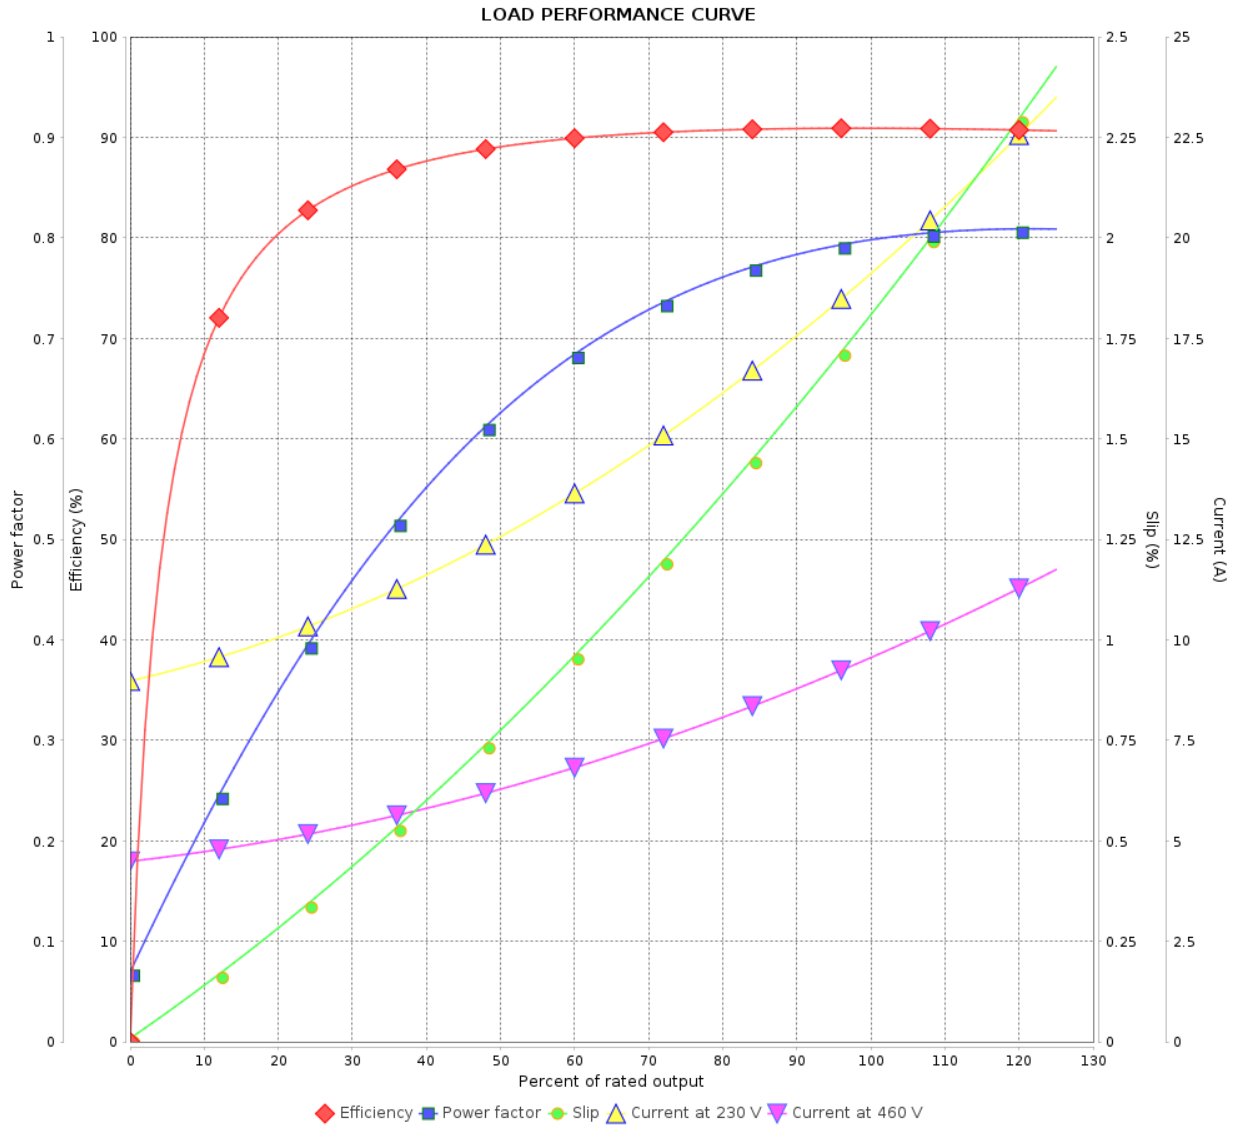

Performance : 230/460 V 60 Hz 6P

Rated current : 19.0/9.48 A
LRC : 6.8
Rated torque : 4.62 kgfm
Locked rotor torque : 250 %
Breakdown torque : 300 %
Rated speed : 1178 rpm

Moment of inertia (J) : 0.1652 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JP NEMA Premium Efficiency Three-Phase

Product code : 14463821

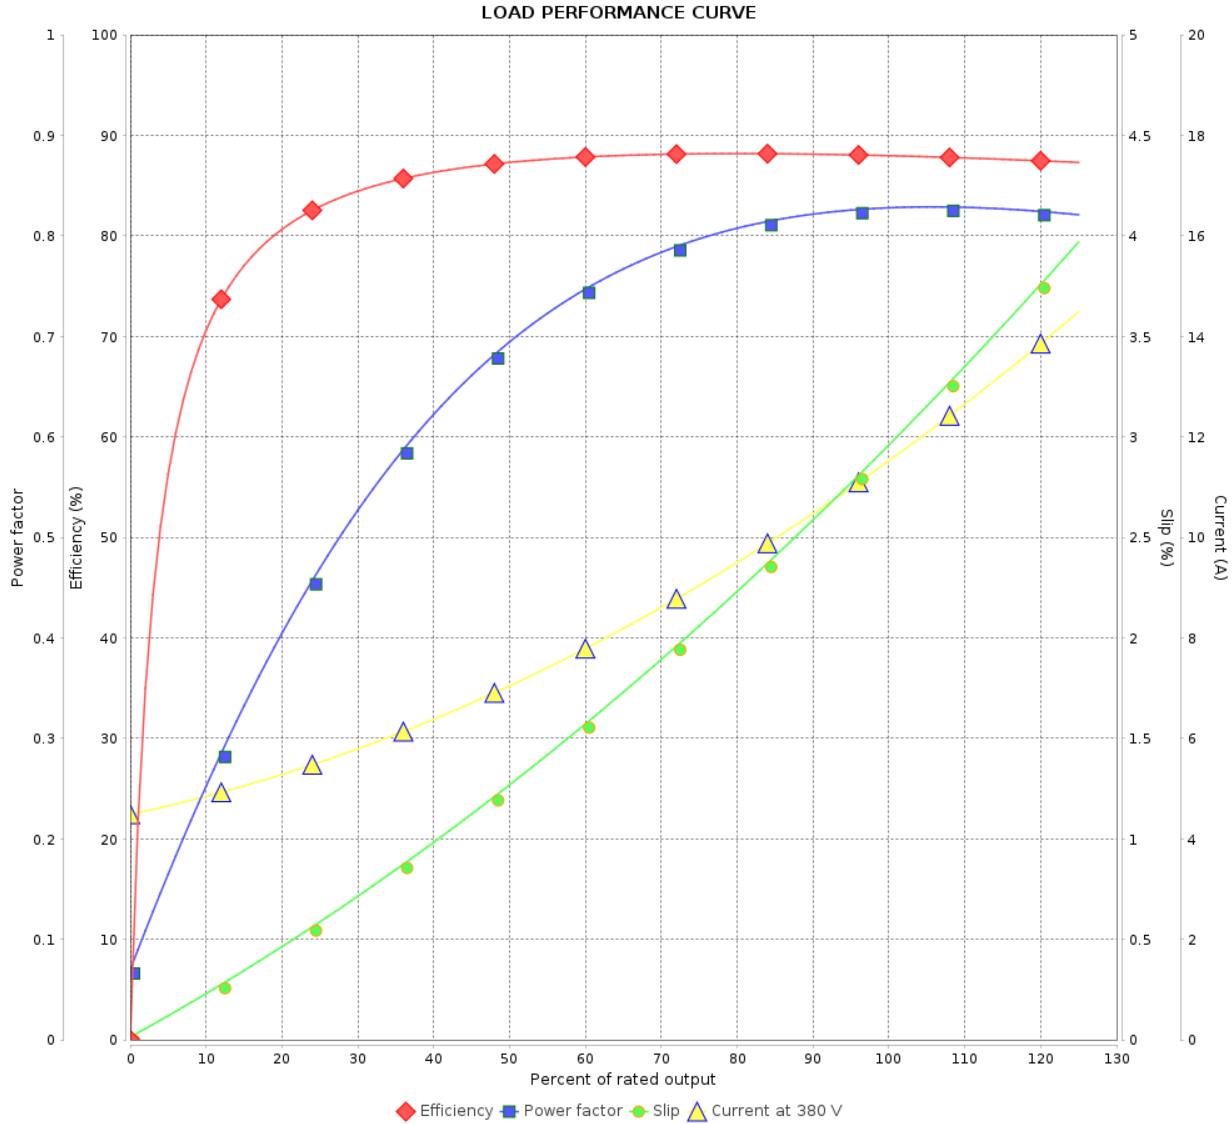

Performance : 380 V 50 Hz 6P IE3

Rated current : 11.4 A
 LRC : 5.2
 Rated torque : 5.61 kgfm
 Locked rotor torque : 170 %
 Breakdown torque : 220 %
 Rated speed : 970 rpm

Moment of inertia (J) : 0.1652 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 Close Coupled Pump JP NEMA
Premium Efficiency Three-Phase

Product code : 14463821

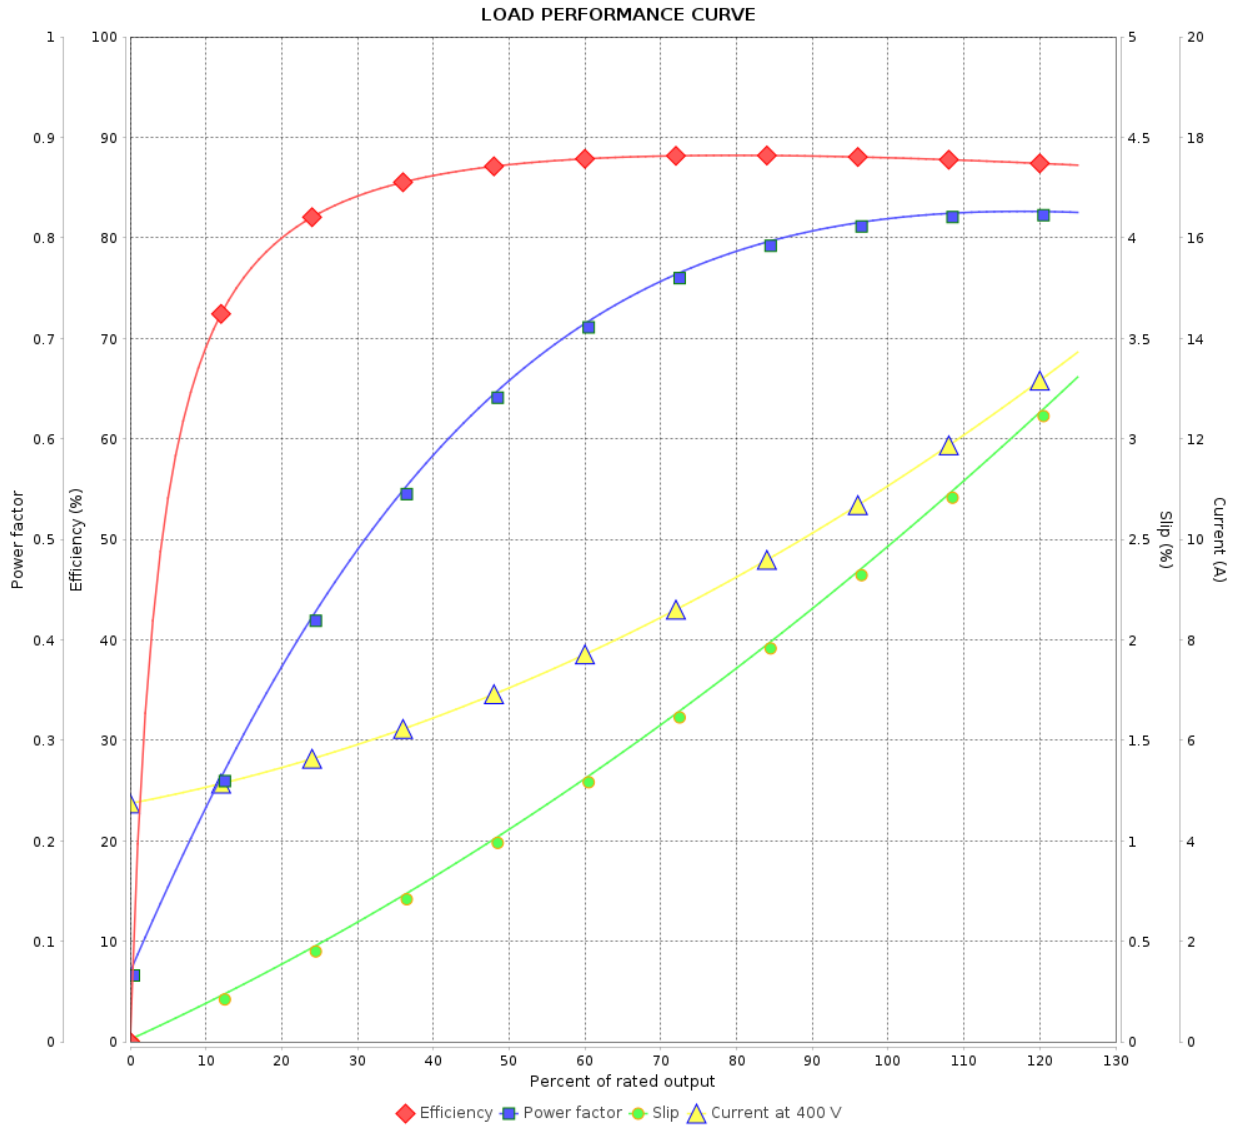

Performance : 400 V 50 Hz 6P IE3

Rated current : 11.0 A
 LRC : 5.8
 Rated torque : 5.58 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 240 %
 Rated speed : 975 rpm

Moment of inertia (J) : 0.1652 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				
			5 / 6	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 Close Coupled Pump JP NEMA
Premium Efficiency Three-Phase

Product code : 14463821

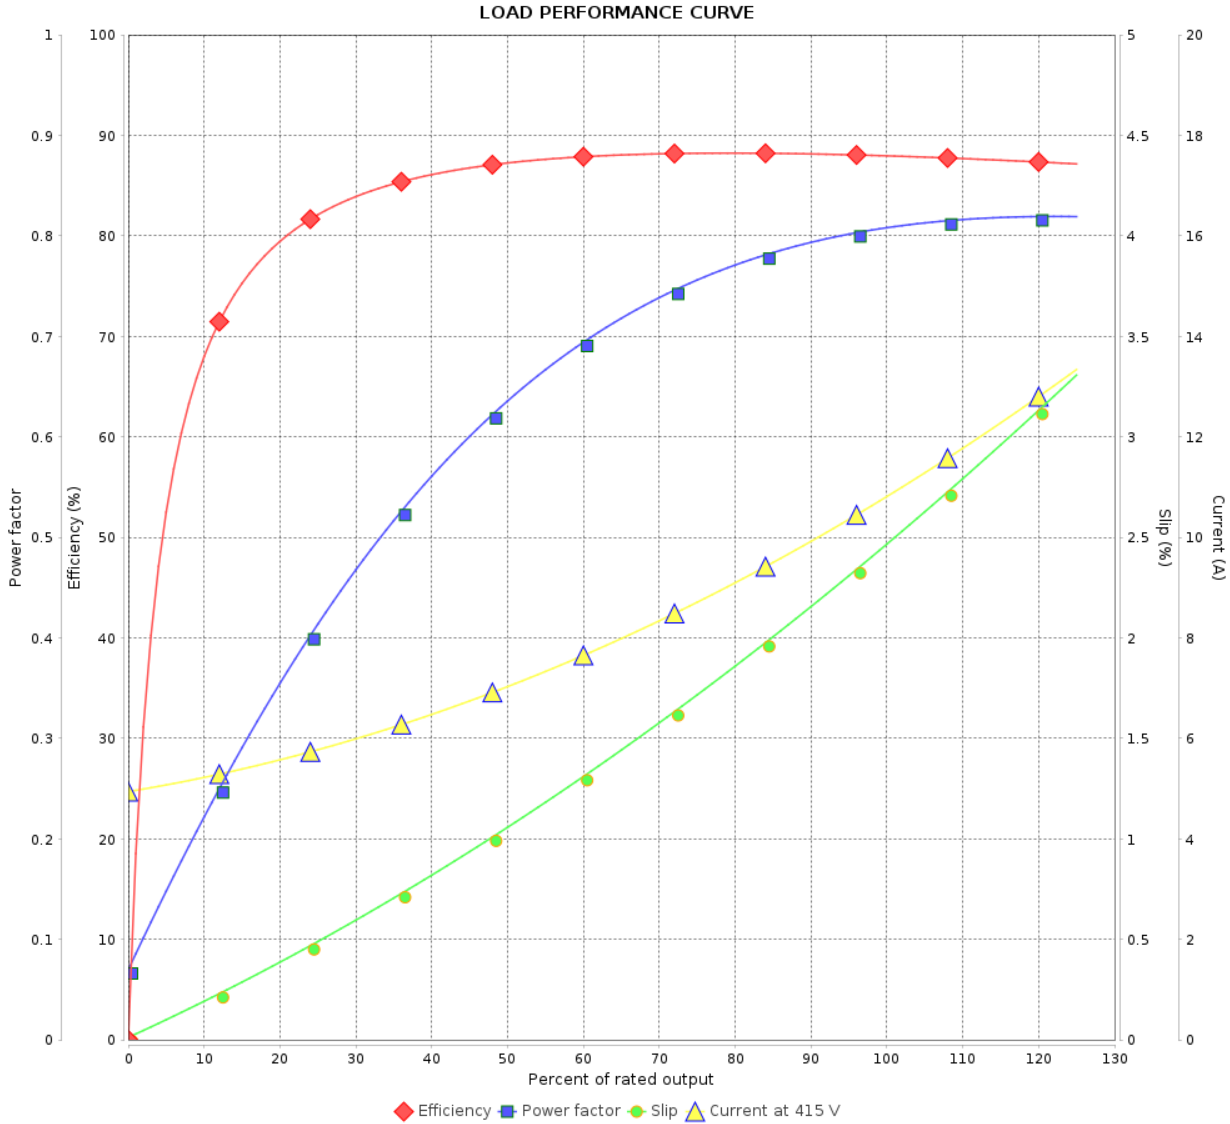

Performance : 415 V 50 Hz 6P IE3

Rated current : 10.7 A
LRC : 6.2
Rated torque : 5.58 kgfm
Locked rotor torque : 220 %
Breakdown torque : 260 %
Rated speed : 975 rpm

Moment of inertia (J) : 0.1652 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				