

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel Jet Pump - J type Single-Phase Product code : 14477578

Frame	: W56J	Locked rotor time	: 27s (cold) 15s (hot)
Output	: 0.33 HP (0.25 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 115/208-230 V	Altitude	: 1000 m.a.s.l.
Rated current	: 3.20/1.77-1.60 A	Cooling method	: IC01 - ODP
L. R. Amperes	: 28.2/15.6-14.1 A	Mounting	: F-1
LRC	: 8.8x(Code L)	Rotation ¹	: CCW
No load current	: 1.00/0.431-0.500 A	Noise level ²	: 56.0 dB(A)
Rated speed	: 3510 rpm	Vibration	: A
Slip	: 2.50 %	Starting method	: Direct On Line
Rated torque	: 0 kgfm	Approx. weight ³	: 8.8 kg
Locked rotor torque	: 280 %		: 207N (ISO 12944 - C2)
Breakdown torque	: 300 %		: Munsell N 1 - Matte
Insulation class	: F	Design	: N
Service factor	: 1.75		
Moment of inertia (J)	: 0.0011 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	56.0	64.0	70.5	Max. traction	: 1 kgf
Power Factor	0.97	0.97	0.97	Max. compression	: 11 kgf

	Drive end	Non drive end
Bearing type	: 6203 2RS	: 6202 2RS
Sealing	: Without Bearing Seal	: Without Bearing Seal
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	: Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	25/09/2026			
		Page		Revision
		1 / 2		

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel Jet Pump - J type
Single-Phase

Product code : 14477578

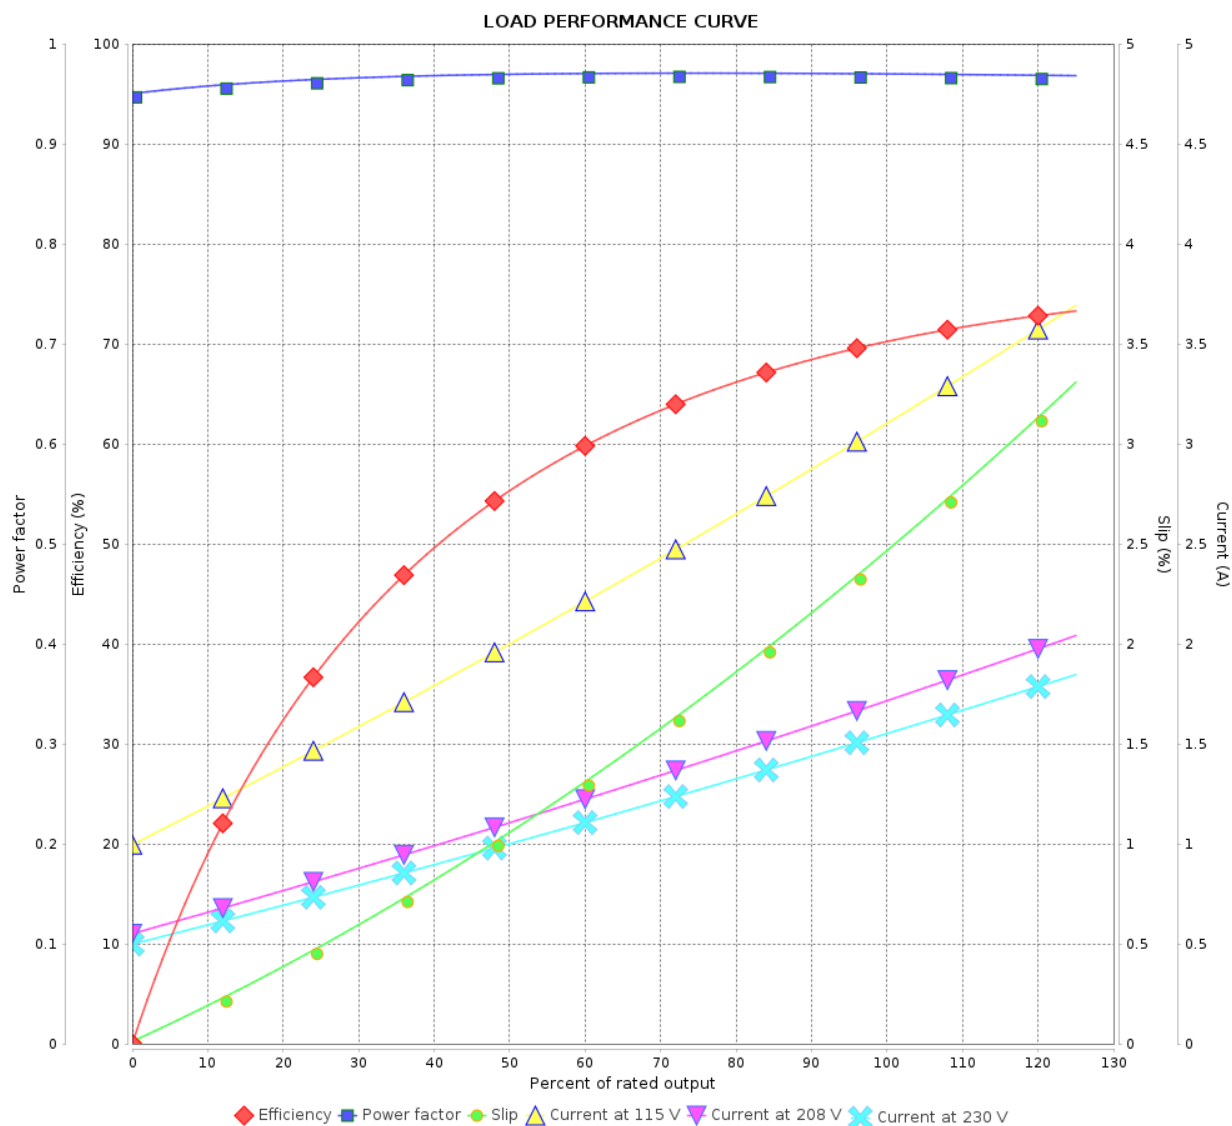

Performance : 115/208-230 V 60 Hz 2P

Rated current : 3.20/1.77-1.60 A
LRC : 8.8
Rated torque : 0 kgfm
Locked rotor torque : 280 %
Breakdown torque : 300 %
Rated speed : 3510 rpm

Moment of inertia (J) : 0.0011 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor :
Temperature rise : 80 K
Design : N

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					