

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer	:				
Product line	: Jet Pump - C type Three-Phase	Product code :	14513302		
Frame	: W56C	Cooling method	: IC01 - ODP		
Insulation class	: F	Mounting	: W-6		
Duty cycle	: Cont.(S1)	Rotation ¹	: CCW		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 7.2 kg		
		Moment of inertia (J)	: 0.0006 kgm ²		
Output [HP]	0.5				
Poles	2				
Frequency [Hz]	60				
Rated voltage [V]	575				
Rated current [A]	0.703				
L. R. Amperes [A]	5.13				
LRC [A]	7.3x(Code M)				
No load current [A]	0.480				
Rated speed [RPM]	3450				
Slip [%]	4.17				
Rated torque [kgfm]	0.105				
Locked rotor torque [%]	370				
Breakdown torque [%]	400				
Service factor	1.15				
Temperature rise	80 K				
Locked rotor time	43s (cold) 24s (hot)				
Noise level ²	62.0 dB(A)				
Efficiency (%)	25%				
	50%	62.0			
	75%	68.0			
	100%	73.4			
Power Factor	25%				
	50%	0.53			
	75%	0.65			
	100%	0.72			
Bearing type	: <u>Drive end</u> 6203 2RS	<u>Non drive end</u> 6202 2RS	Foundation loads		
Sealing	: Without	Without	Max. traction	: 10 kgf	
	Bearing Seal	Bearing Seal	Max. compression	: 17 kgf	
Lubrication interval	: -	-			
Lubricant amount	: -	-			
Lubricant type	: Mobil Polyrex EM				
Notes					
<p>This revision replaces and cancel the previous one, which must be eliminated.</p> <p>(1) Looking the motor from the shaft end.</p> <p>(2) Measured at 1m and with tolerance of +3dB(A).</p> <p>(3) Approximate weight subject to changes after manufacturing process.</p> <p>(4) At 100% of full load.</p>			<p>These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.</p>		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	17/05/2022			1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - C type Three-Phase Product code : 14513302

LOAD PERFORMANCE CURVE

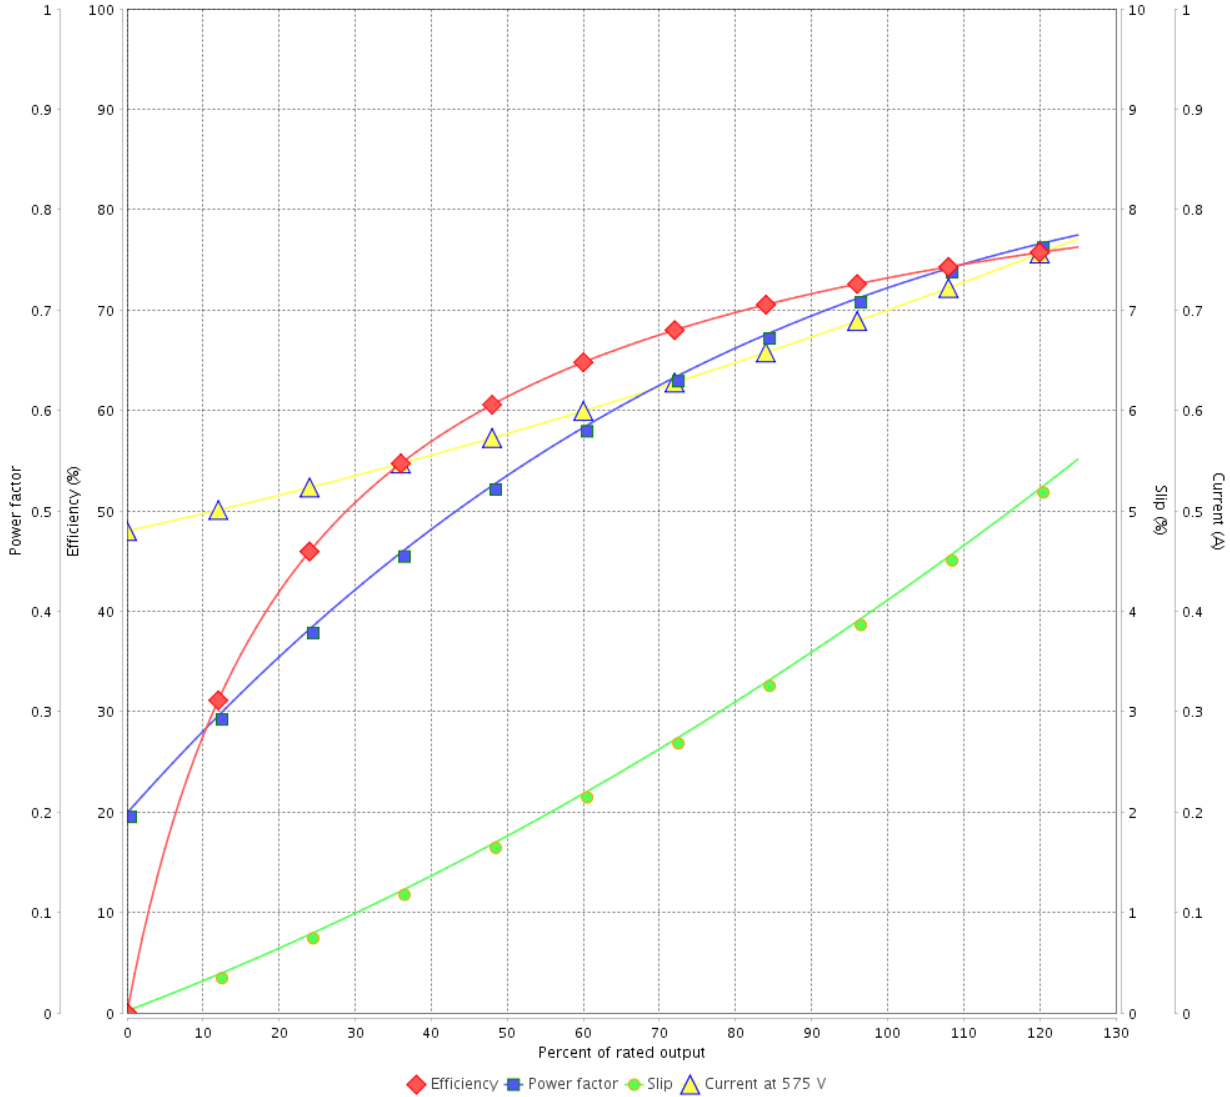

Performance : 575 V 60 Hz 2P

Rated current	: 0.703 A	Moment of inertia (J)	: 0.0006 kgm ²
LRC	: 7.3	Duty cycle	: Cont.(S1)
Rated torque	: 0.105 kgfm	Insulation class	: F
Locked rotor torque	: 370 %	Service factor	: 1.15
Breakdown torque	: 400 %	Temperature rise	: 80 K
Rated speed	: 3450 rpm		

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	17/05/2022			