


Grounding 25-185 mm² / 3AWG-350MCM

Dimensions in mm

220 HP 02 Poles 60 Hz										A

NDE endshield with electrically insulated bearing hub
 Color RAL 5009
 Painting plan 203A
 Mounting B3L(E)

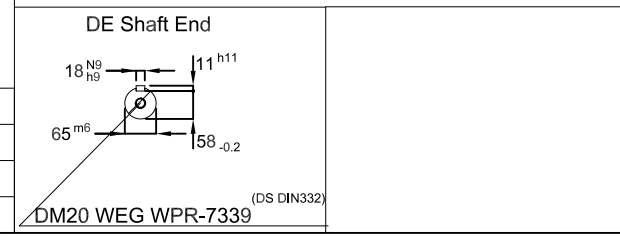

ECM	LOC	SUMMARY OF MODIFICATIONS			HYBRISUSER				00
EXECUTED	HYBRISUSER		THREE PH. MOTOR W22 IE3			PREVIEW WDD 00 SHEET /		A3	
CHECKED			FRAME 315L IP55 TEFC						
RELEASED									
REL. DATE									