DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: W22 Nema Premium 4 - Design A
Product code	: 14637591

Frame	: L213/5T
Output	: 10 HP (7.5 kW)
Poles	: 4
Frequency	: 60 Hz
Rated voltage	: 460-230 V
Rated current	: 12.0-24.0 A
L. R. Amperes	: 101-202 A
LRC	: 8.4 Code K
No load current	: 5.50-11.0 A
Rated speed	: 1765 rpm
Slip	: 1.94 %
Rated torque	: 4.11 kgfm
Locked rotor torque	: 230 %
Pull up torque	: 195 %
Breakdown torque	: 350 %
Insulation class	: F
Service factor	: 1.25
Moment of inertia (J)	: 0.0751 kgm²

Locked rotor time	: 16 s (hot) 29 s (cold)
Temperature rise[4]	: 80 K
Duty cycle	: S1
Ambient temperature	: -20 °C to +40 °C
Altitude	: 1000 m.a.s.l
Protection degree	: IP55
Cooling method	: IC411 - TEFC
Mounting	: B3R(D)
Rotation[1]	: Both
Noise level[2]	: 58 dB(A)
Starting method	: Direct On Line
Approx. weight[3]	: 91.0 kg
Design	: A

Output	Start	50%	75%	100%
Efficiency (%)	-	91.7	92.4	93.0
Power Factor	0.47	0.66	0.78	0.84

Load type	: -
Load torque	: -
Load inertia (J=GD²/4)	: -

	Drive end	Non drive end
Bearing type	6308-ZZ	6207-ZZ
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	POLYUREA BASED GREASE	

Foundation loads	
Max. traction	: 218 kgf
Max. compression	: 309 kgf

Notes:

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
0.00	0.00	0.00	0.00	0.00	0.00	0.00

Standards

Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Performed	Checked	Date
				22/10/2018


Performed by	yasmim		480525/2018	
Checked by	AUTOMATICO		Page	Revision
Date	22/10/2018		1/2	1

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: W22 Nema Premium 4 - Design A
Product code	: 14637591

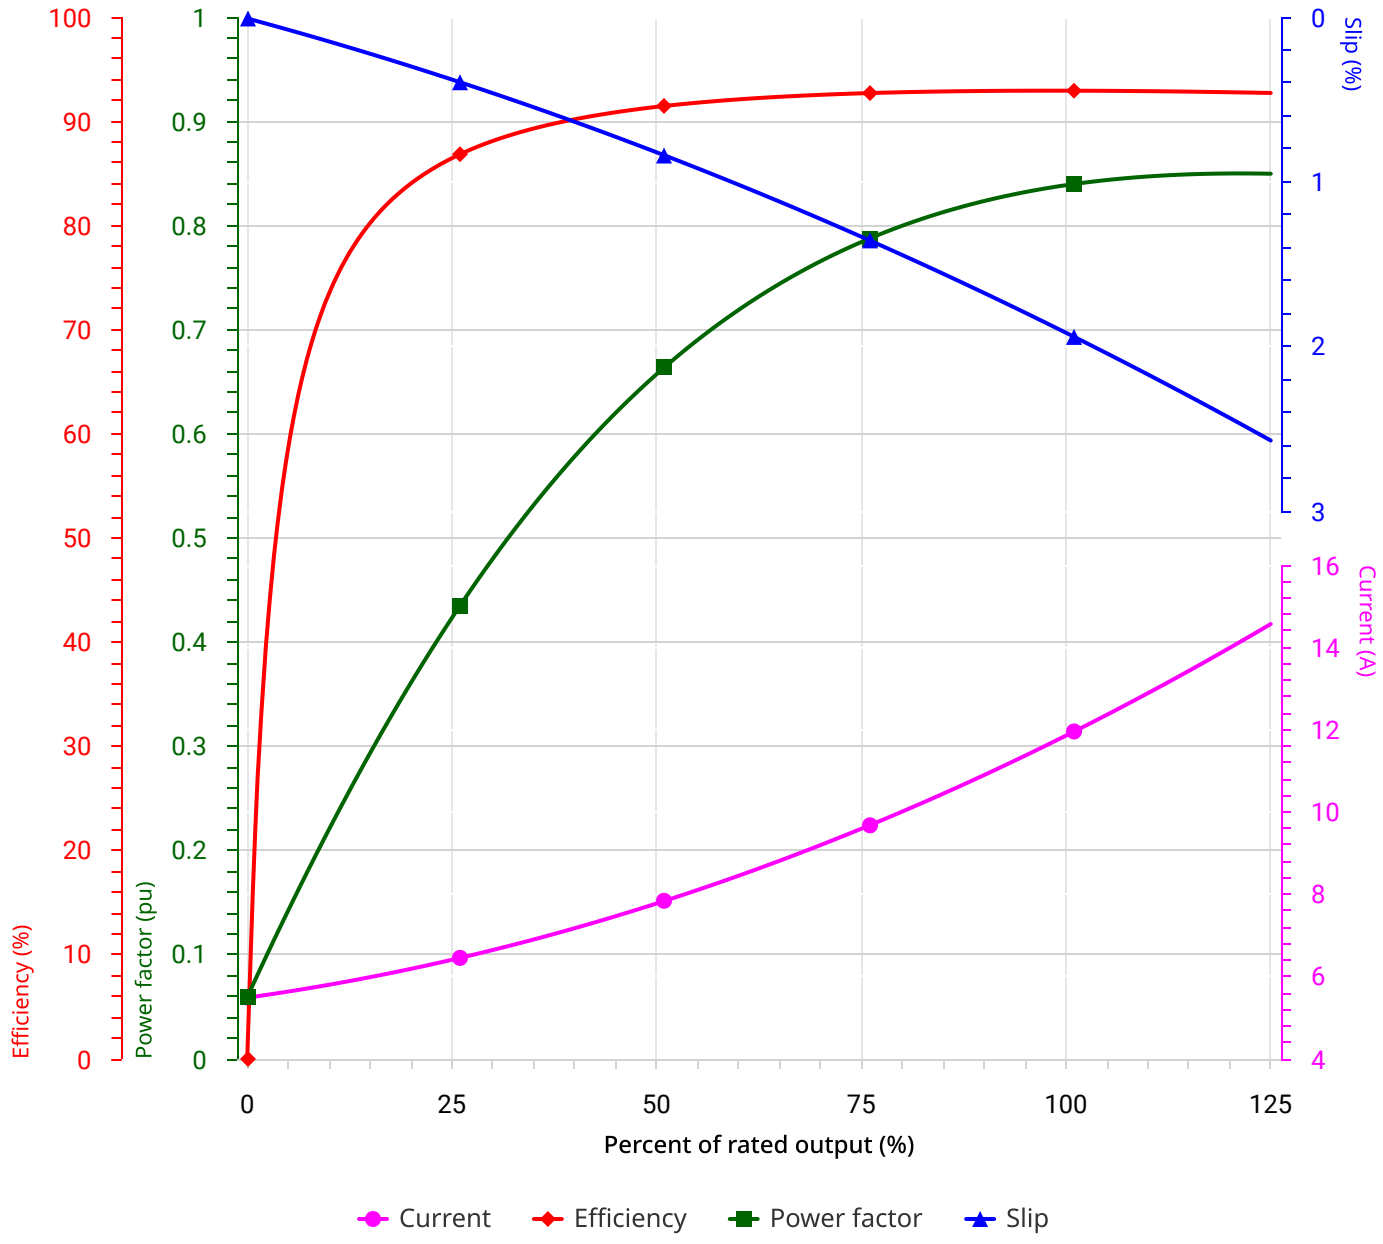

Performance	: 10 HP (7.5 kW) 460/230V 60Hz 4P L213/5T

Rated current	: 12.0/24.0 A	Moment of inertia (J)	: 0.0751 kgm²
LRC	: 8.4 Code K	Duty cycle	: Cont.(S1)
Rated torque	: 4.11 kgfm	Insulation class	: F
Locked rotor torque	: 230 %	Service factor	: 1.25
Breakdown torque	: 350 %	Temperature rise	: 80 K
Rated speed	: 1765 rpm	Design	: A

Rev.	Changes Summary	Performed	Checked	Date
				22/10/2018

Performed by	yasmim		480525/2018	
Checked by	AUTOMATICO		Page	Revision
Date	22/10/2018		2/2	1

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.