

DATA SHEET



Single Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 00022 Single-Phase

Product code : 14672932

Frame : 182/4TC
 Output : 5 HP (3.7 kW)
 Poles : 4
 Frequency : 60 Hz
 Rated voltage : 230 V
 Rated current : 21.4 A
 L. R. Amperes : 139 A
 LRC : 6.5x(Code H)
 No load current : 8.00 A
 Rated speed : 1730 rpm
 Slip : 3.89 %
 Rated torque : 2.10 kgfm
 Locked rotor torque : 360 %
 Breakdown torque : 235 %
 Insulation class : F
 Service factor : 1.15
 Moment of inertia (J) : 0.0184 kgm²

Locked rotor time : 12s (cold) 7s (hot)
 Temperature rise : 80 K
 Duty cycle : Cont.(S1)
 Ambient temperature : -20°C to +40°C
 Altitude : 1000 m.a.s.l.
 Protection degree : IP55
 Cooling method : IC411 - TEFC
 Mounting : F-1
 Rotation¹ : Both (CW and CCW)
 Noise level² : 60.0 dB(A)
 Starting method : Direct On Line
 Approx. weight³ : 55.7 kg

Output	50%	75%	100%
Efficiency (%)	72.5	78.5	80.0
Power Factor	0.89	0.93	0.94

Foundation loads
 Max. traction : 75 kgf
 Max. compression : 131 kgf

	Drive end	Non drive end
Bearing type	6207 2RS	6206 2RS
Sealing	V'Ring	V'Ring
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 2		
Date	15/01/2024			

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 00022 Single-Phase

Product code : 14672932

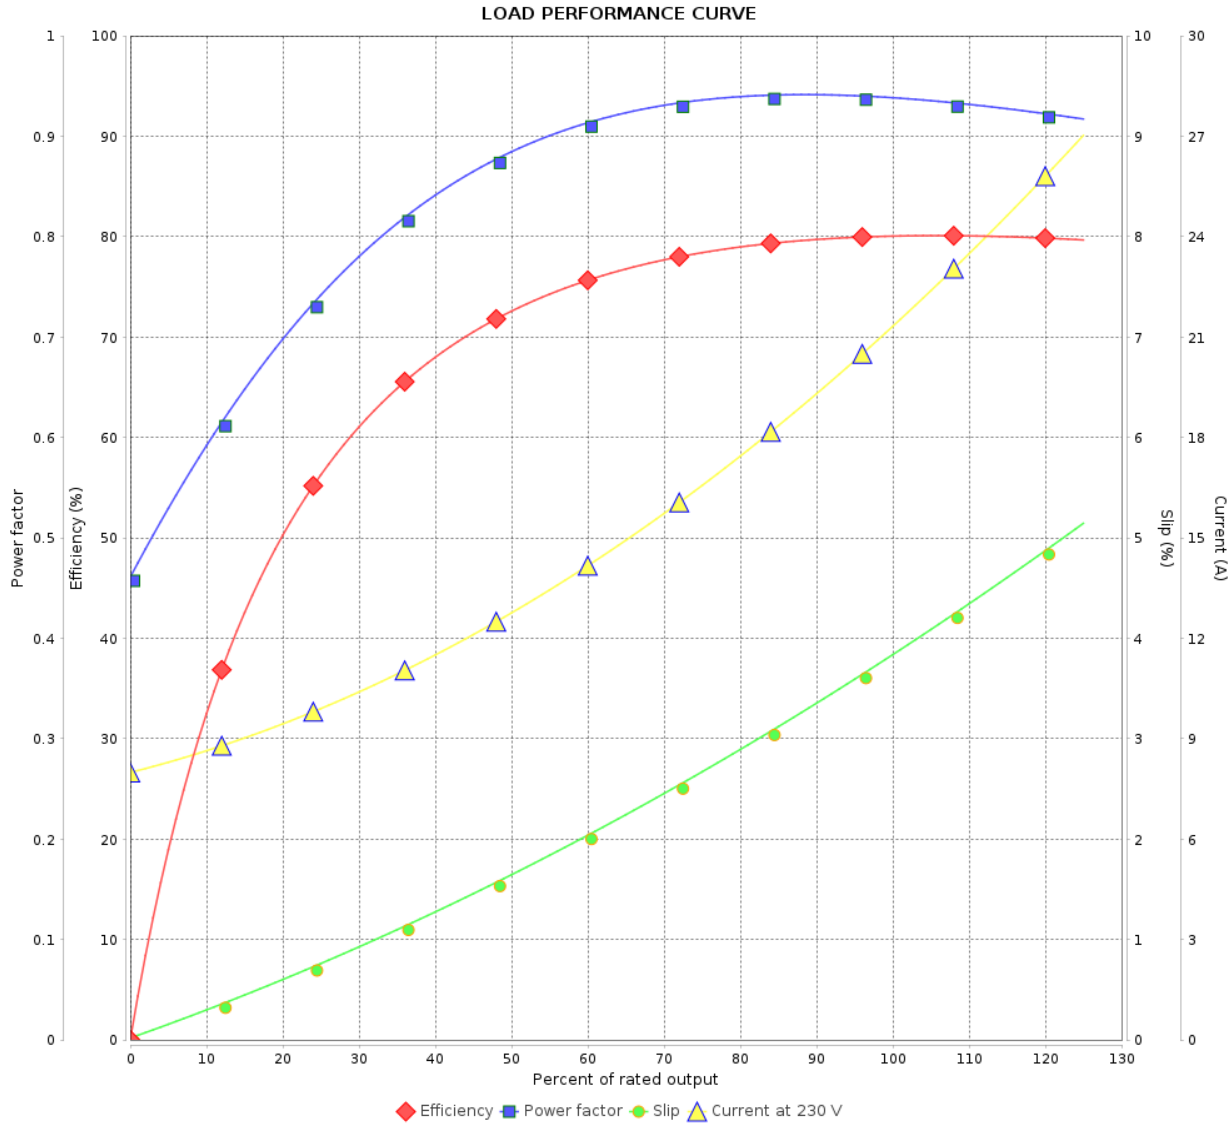

Performance : 230 V 60 Hz 4P

Rated current : 21.4 A
 LRC : 6.5
 Rated torque : 2.10 kgfm
 Locked rotor torque : 360 %
 Breakdown torque : 235 %
 Rated speed : 1730 rpm

Moment of inertia (J) : 0.0184 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	15/01/2024			