DATA SHEET

Single Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: W01 - TEFC - Standard Efficiency Jet Pump - Forma C
Product code	: 14788844

Frame	: 56C
Output	: 2 HP (1.5 kW)
Poles	: 2
Frequency	: 60 Hz
Rated voltage	: 115/208-230 V
Rated current	: 17.4/9.62-8.70 A
L. R. Amperes	: 136/67.9 A
LRC	: 7.8 Code J
No load current	: 5.00/2.50 A
Rated speed	: 3495 rpm
Slip	: 2.92 %
Rated torque	: 0.415 kgfm
Locked rotor torque	: 220 %
Pull up torque	: 185 %
Breakdown torque	: 250 %
Insulation class	: F
Service factor	: 1.15
Moment of inertia (J)	: 0.003 kgm²

Locked rotor time	: 6 s (hot) 11 s (cold)
Duty cycle	: S1
Ambient temperature	: -20 °C to +40 °C
Altitude	: 1000 m.a.s.l
Protection degree	: IP55
Cooling method	: IC411 - TEFC
Mounting	: F-1/B14R(D)
Rotation[1]	: Counter clockwise
Noise level[2]	: 68 dB(A)
Starting method	: Direct On Line
Approx. weight[3]	: 16.0 kg
Design	: L

Output	Start	50%	75%	100%
Efficiency (%)	-	70.0	75.0	77.0
Power Factor	0.83	0.94	0.97	0.97

Load type	: -
Load torque	: -
Load inertia (J=GD²/4)	: -

	Drive end	Non drive end
Bearing type	6203-2RS	6202-2RS
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	MOBIL POLYREX EM	

Foundation loads	
Max. traction	: -
Max. compression	: -

Notes:

Standards

Specification	: MG1 - Part 10	Vibration	:
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Performed	Checked	Date
				2026/11/12


Performed by				
Checked by			Page	Revision
Date	2026/11/12		1/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: W01 - TEFC - Standard Efficiency Jet Pump - Forma C
Product code	: 14788844

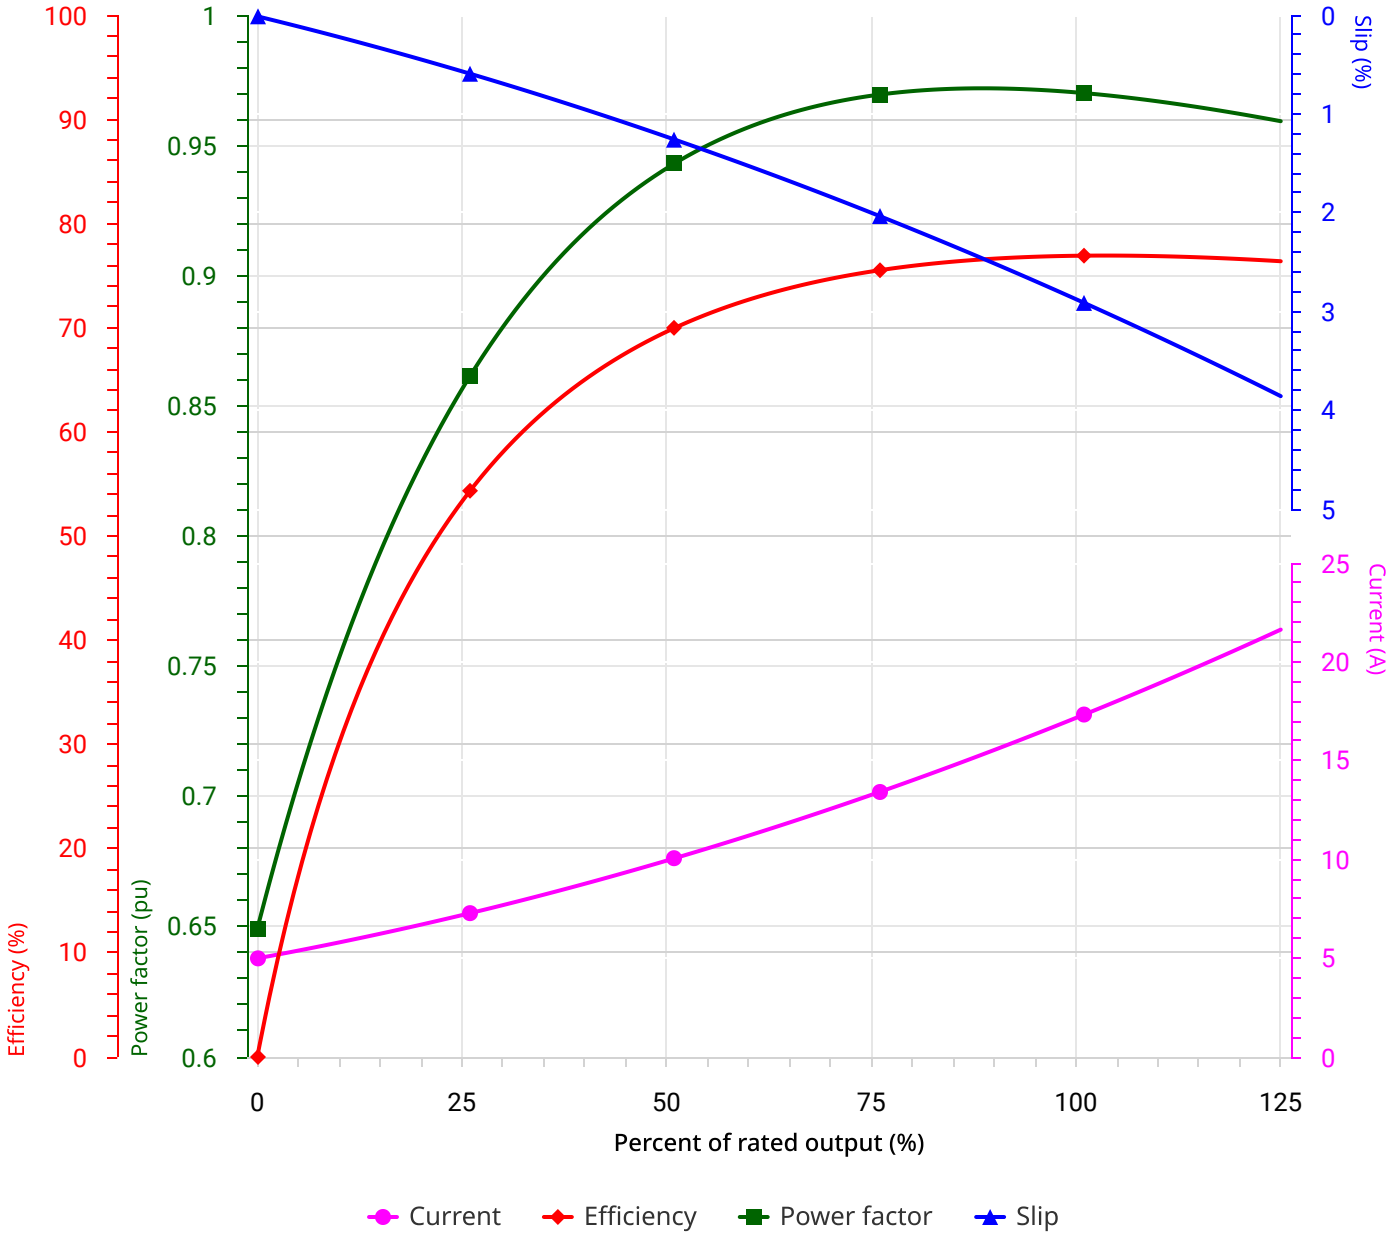

Performance	: 2 HP (1.5 kW) 115/208/230V 60Hz 2P 56C

Rated current	: 17.4/9.62/8.70 A	Moment of inertia (J)	: 0.003 kgm²
LRC	: 7.8 Code J	Duty cycle	: Cont.(S1)
Rated torque	: 0.415 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.15
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 3495 rpm	Design	: L

Rev.	Changes Summary	Performed	Checked	Date
				2026/11/12

Performed by				
Checked by			Page	Revision
Date	2026/11/12		2/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.