


DATA SHEETPRELIMINARY
DOCUMENT**Single Phase Induction Motor - Squirrel Cage**

Customer :

Product line : W01 - TEFC - Standard Efficiency Jet Pump - Forma J
Product code : 14795711

Frame	: 56	Locked rotor time	: 6 s (hot) 11 s (cold)
Output	: 3 HP (2.2 kW)	Duty cycle	: S1
Poles	: 2	Ambient temperature	: -20 °C to +40 °C
Frequency	: 60 Hz	Altitude	: 1000 m.a.s.l
Rated voltage	: 230 V	Protection degree	: IP55
Rated current	: 12.7 A	Cooling method	: IC411 - TEFC
L. R. Amperes	: 102 A	Mounting	: F-1/B14R(D)
LRC	: 8.0 Code J	Rotation ¹	: Counter clockwise
No load current	: 4.00 A	Noise level ²	: 68 dB(A)
Rated speed	: 3490 rpm	Starting method	: Direct On Line
Slip	: 3.06 %	Approx. weight ³	: 20.5 kg
Rated torque	: 0.624 kgfm	Design	: L
Locked rotor torque	: 210 %		
Pull up torque	: 175 %		
Breakdown torque	: 250 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.004 kgm ²		

Output	Start	50%	75%	100%	Load type	: -
Efficiency (%)	-	76.0	79.0	80.0	Load torque	: -
Power Factor	0.82	0.86	0.92	0.94	Load inertia (J=GD ² /4)	: -

Bearing type	Drive end	Non drive end	Foundation loads
Lubrication interval	6203-2RS	6202-2RS	Max. traction
Lubricant amount	-	-	Max. compression
Lubricant type	MOBIL POLYREX EM		

Notes:

Standards	Specification	: MG1 - Part 10	Vibration	:
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..

(1) Looking the motor from the shaft end.

(2) Measured at 1m and with tolerance of +0dB(A).

(3) Approximate weight, subject to be changed after manufacturing process.

(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by					
Date	2026/10/19				
				Page	Revision
				1/2	0

LOAD PERFORMANCE CURVE


PRELIMINARY
DOCUMENT



Single Phase Induction Motor - Squirrel Cage

Customer :

Product line : W01 - TEFC - Standard Efficiency Jet Pump - Forma J
Product code : 14795711

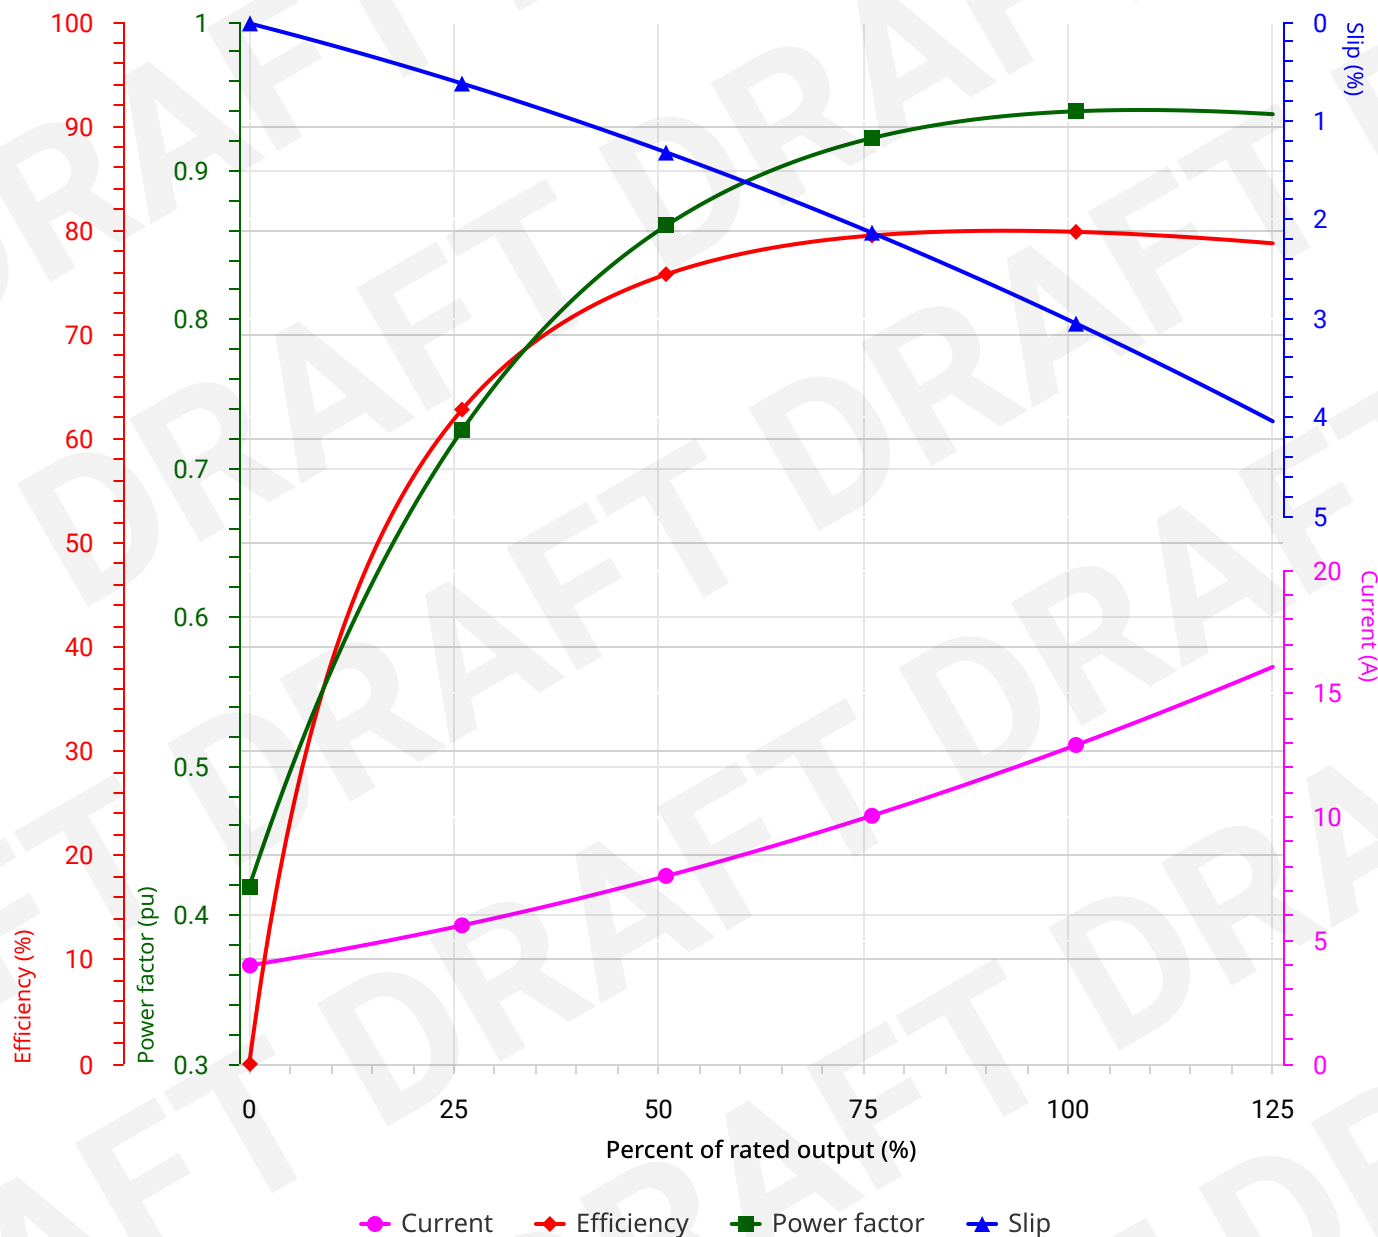

Performance : 3 HP (2.2 kW) 230V 60Hz 2P 56

Rated current	: 12.7 A	Moment of inertia (J)	: 0.004 kgm ²
LRC	: 8.0 Code J	Duty cycle	: Cont.(S1)
Rated torque	: 0.624 kgfm	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.15
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 3490 rpm	Design	: L

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 2/2 Revision 0		
Checked by				
Date	2026/10/19			