

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer	:			
Product line	: Premium Efficiency Three-Phase	Product code : 14820956		
Frame	: 56HC	Cooling method : IC411 - TEFC		
Insulation class	: F	Mounting : F-1		
Duty cycle	: Cont.(S1)	Rotation ¹ : Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method : Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³ : 16.0 kg		
Protection degree	: IP55	Moment of inertia (J) : 0.0060 kgm ²		
Design	: B			
Output [HP]		0.75		
Poles		6		
Frequency [Hz]		60		
Rated voltage [V]		575		
Rated current [A]		1.03		
L. R. Amperes [A]		6.71		
LRC [A]		6.5x(Code K)		
No load current [A]		0.746		
Rated speed [RPM]		1160		
Slip [%]		3.33		
Rated torque [kgfm]		0.469		
Locked rotor torque [%]		290		
Breakdown torque [%]		370		
Service factor		1.15		
Temperature rise		80 K		
Locked rotor time		72s (cold) 40s (hot)		
Noise level ²		50.0 dB(A)		
Efficiency (%)	25%			
	50%	77.0		
	75%	81.5		
	100%	82.5		
Power Factor	25%			
	50%	0.43		
	75%	0.55		
	100%	0.65		
Bearing type	: <u>Drive end</u> 6203 ZZ <u>Non drive end</u> 6202 ZZ	Foundation loads		
Sealing	: V'Ring Without Bearing Seal	Max. traction : 48 kgf		
Lubrication interval	: - -	Max. compression : 64 kgf		
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 2	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Premium Efficiency Three-Phase Product code : 14820956

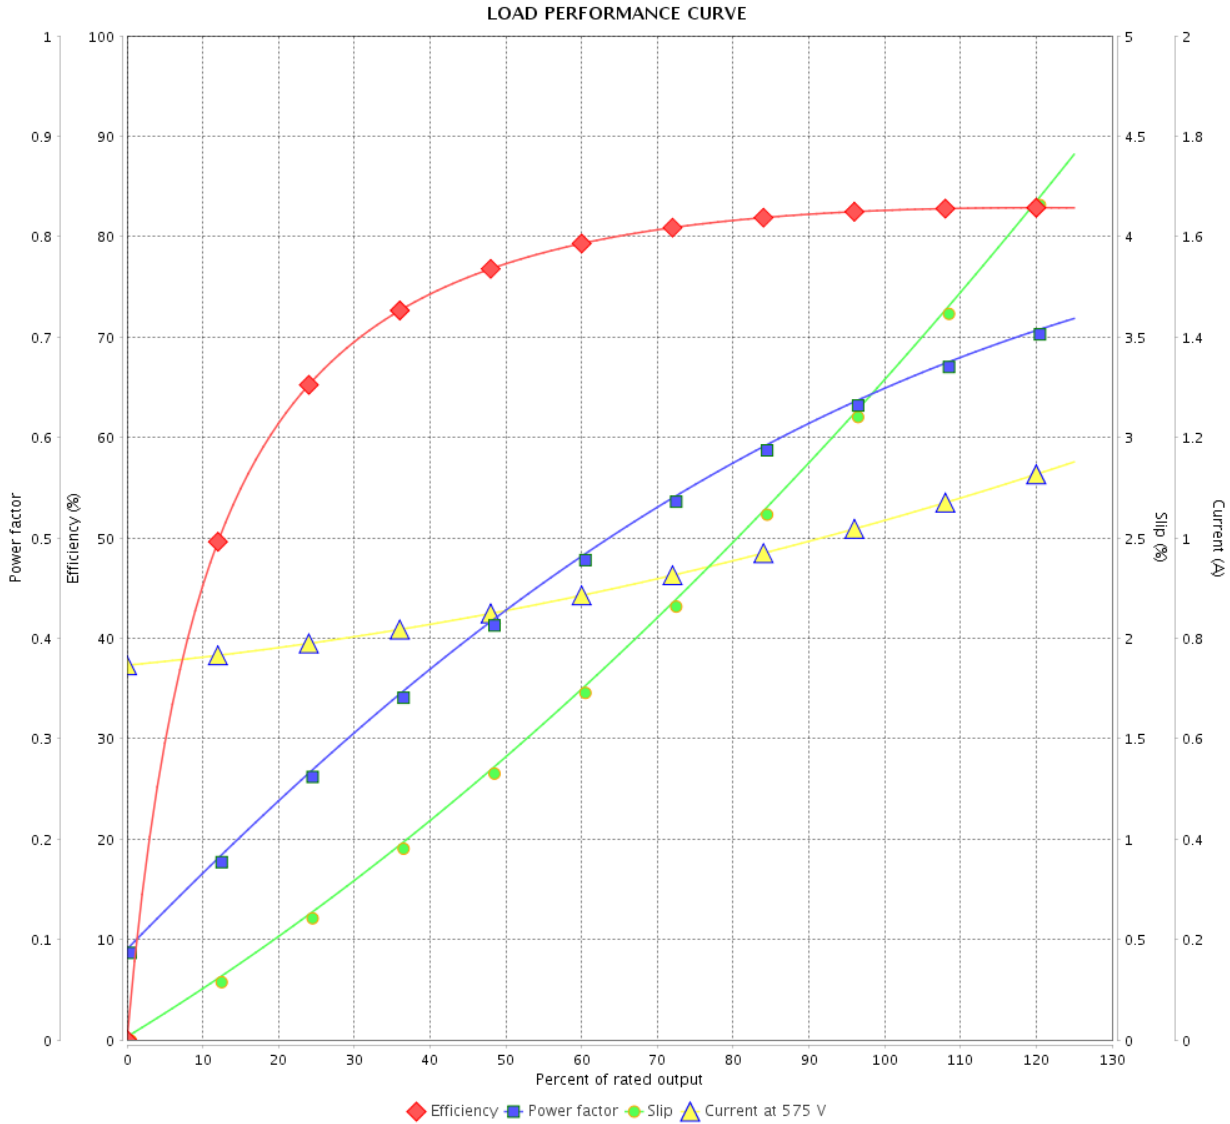

Performance : 575 V 60 Hz 6P

Rated current	: 1.03 A	Moment of inertia (J)	: 0.0060 kgm ²
LRC	: 6.5	Duty cycle	: Cont.(S1)
Rated torque	: 0.469 kgfm	Insulation class	: F
Locked rotor torque	: 290 %	Service factor	: 1.15
Breakdown torque	: 370 %	Temperature rise	: 80 K
Rated speed	: 1160 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	17/05/2022			