

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :					
Product line	: W21 Explosion Proof NEMA Premium Efficiency Three-Phase	Product code :	14945679		
Frame	: 143/5TC	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 35.4 kg		
Protection degree	: IP55	Moment of inertia (J)	: 0.0067 kgm ²		
Design	: B				
Output [HP]	1	1	1	1	
Poles	6	6	6	6	
Frequency [Hz]	60	50	50	50	
Rated voltage [V]	230/460	380	400	415	
Rated current [A]	3.26/1.63	1.91	1.86	1.85	
L. R. Amperes [A]	20.2/10.1	9.17	9.67	10.2	
LRC [A]	6.2x(Code K)	4.8x(Code G)	5.2x(Code H)	5.5x(Code J)	
No load current [A]	2.00/1.00	0.950	1.05	1.15	
Rated speed [RPM]	1150	930	940	950	
Slip [%]	4.17	7.00	6.00	5.00	
Rated torque [kgfm]	0.631	0.780	0.772	0.764	
Locked rotor torque [%]	260	180	210	240	
Breakdown torque [%]	280	200	229	250	
Service factor	1.15	1.00	1.00	1.00	
Temperature rise	80 K	80 K	80 K	80 K	
Locked rotor time	50s (cold) 28s (hot)	36s (cold) 20s (hot)	36s (cold) 20s (hot)	36s (cold) 20s (hot)	
Noise level ²	50.0 dB(A)	45.0 dB(A)	45.0 dB(A)	45.0 dB(A)	
Efficiency (%)	25%				
	50%	77.0	77.0	75.5	74.0
	75%	82.0	78.0	78.0	78.0
	100%	82.5	78.5	78.5	78.5
Power Factor	25%				
	50%	0.51	0.58	0.54	0.50
	75%	0.63	0.70	0.67	0.64
	100%	0.70	0.76	0.74	0.72
Bearing type	: <u>Drive end</u> 6205 2RS <u>Non drive end</u> 6204 2RS	Foundation loads			
Sealing	: Oil Seal Lip Seal	Max. traction	: 36 kgf		
Lubrication interval	: - -	Max. compression	: 72 kgf		
Lubricant amount	: - -				
Lubricant type	: Mobil Polyrex EM				
Notes					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary	Performed	Checked	Date	
Performed by					
Checked by			Page	Revision	
Date	15/01/2024		1 / 6		

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	15/01/2024		Page 2 / 6	Revision

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W21 Explosion Proof NEMA Premium
Efficiency Three-Phase

Product code : 14945679

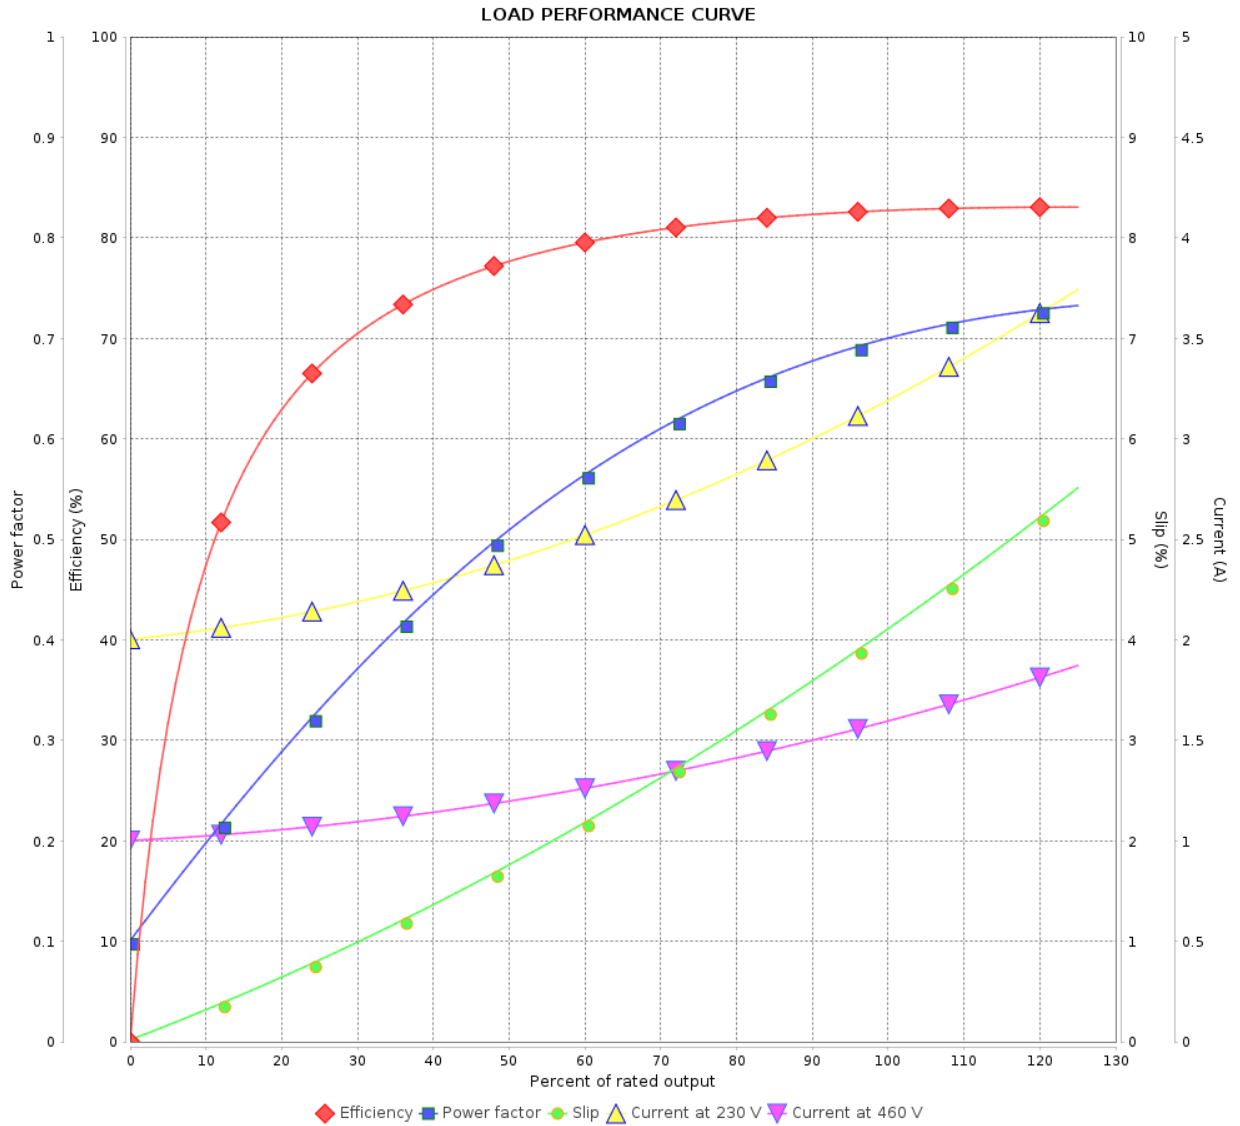

Performance : 230/460 V 60 Hz 6P

Rated current : 3.26/1.63 A
 LRC : 6.2
 Rated torque : 0.631 kgfm
 Locked rotor torque : 260 %
 Breakdown torque : 280 %
 Rated speed : 1150 rpm

Moment of inertia (J) : 0.0067 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				
			3 / 6	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W21 Explosion Proof NEMA Premium
Efficiency Three-Phase

Product code : 14945679

LOAD PERFORMANCE CURVE

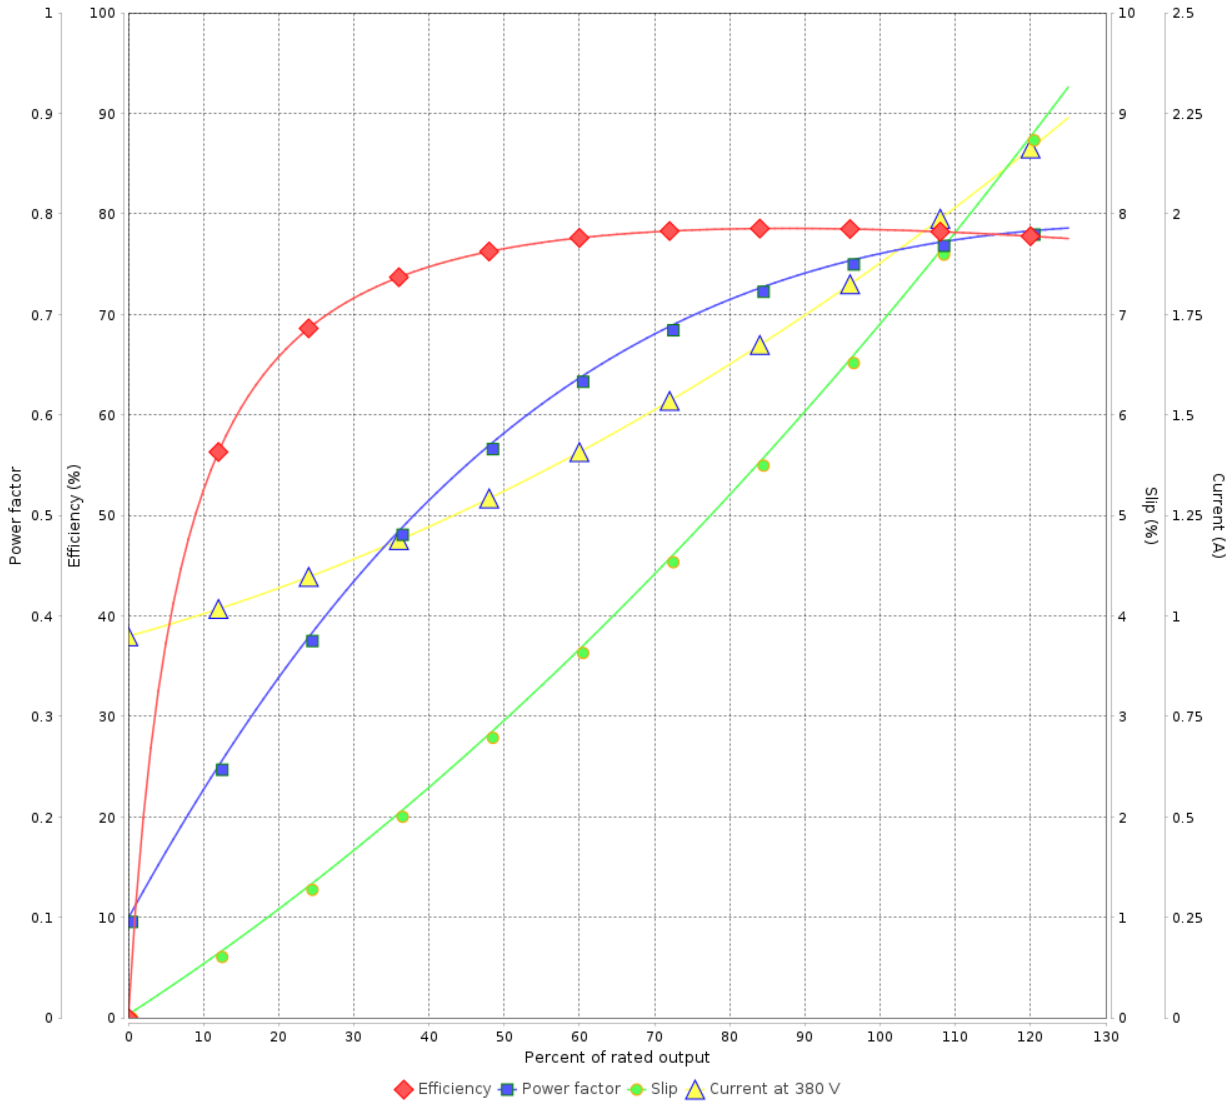

Performance : 380 V 50 Hz 6P IE2

Rated current : 1.91 A
LRC : 4.8
Rated torque : 0.780 kgfm
Locked rotor torque : 180 %
Breakdown torque : 200 %
Rated speed : 930 rpm

Moment of inertia (J) : 0.0067 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 6	Revision
Checked by				
Date	15/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W21 Explosion Proof NEMA Premium
Efficiency Three-Phase

Product code : 14945679

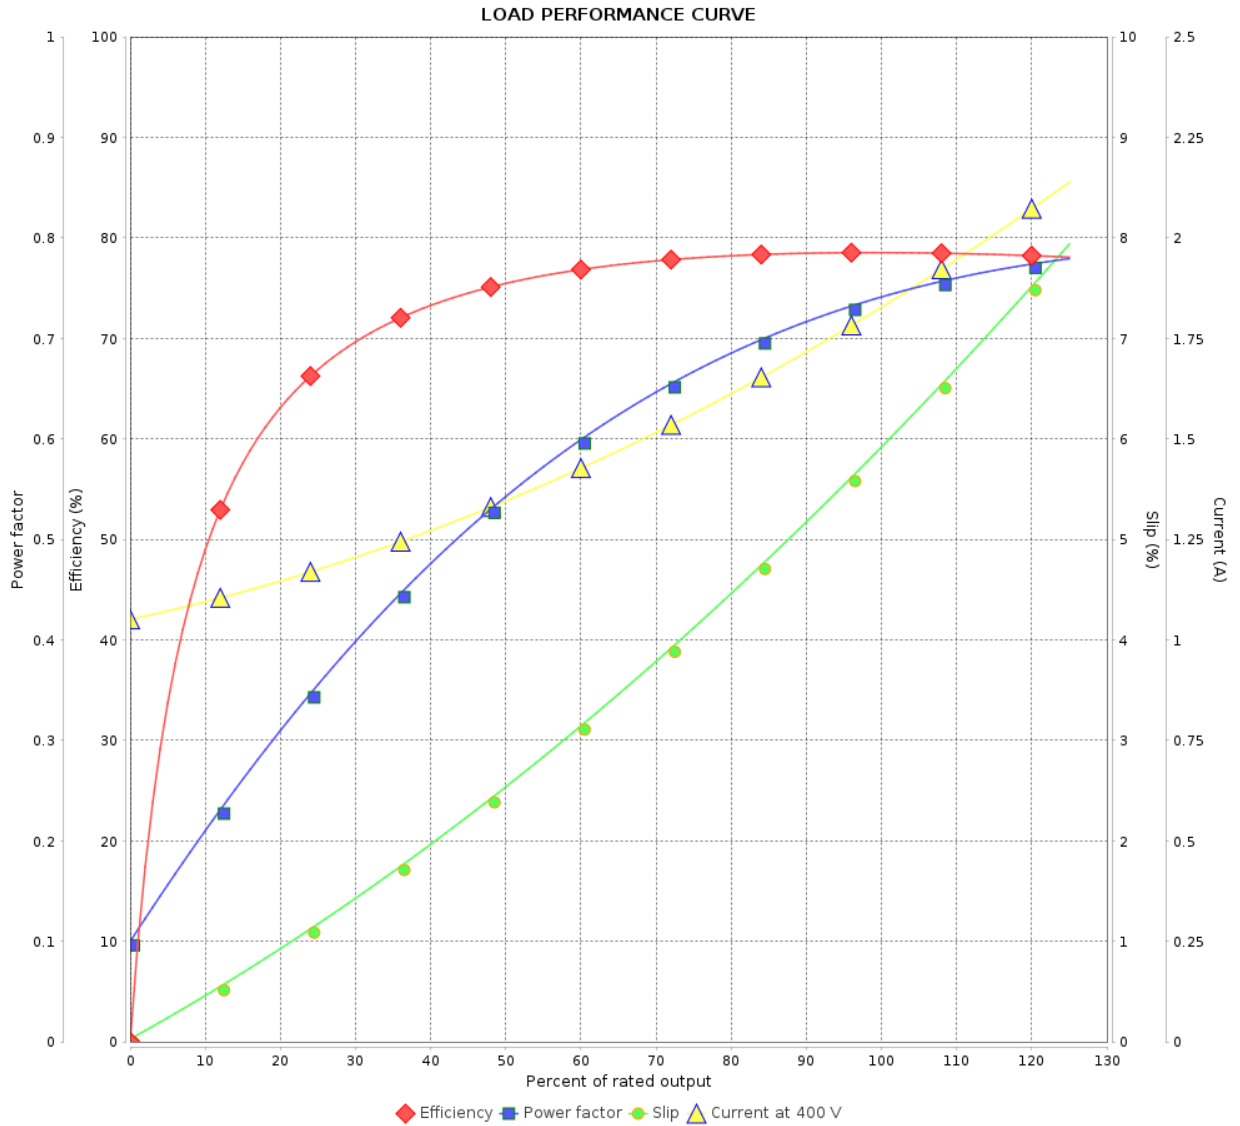

Performance : 400 V 50 Hz 6P IE2

Rated current : 1.86 A
 LRC : 5.2
 Rated torque : 0.772 kgfm
 Locked rotor torque : 210 %
 Breakdown torque : 229 %
 Rated speed : 940 rpm

Moment of inertia (J) : 0.0067 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 6	Revision
Checked by				
Date	15/01/2024			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : W21 Explosion Proof NEMA Premium
Efficiency Three-Phase

Product code : 14945679

LOAD PERFORMANCE CURVE

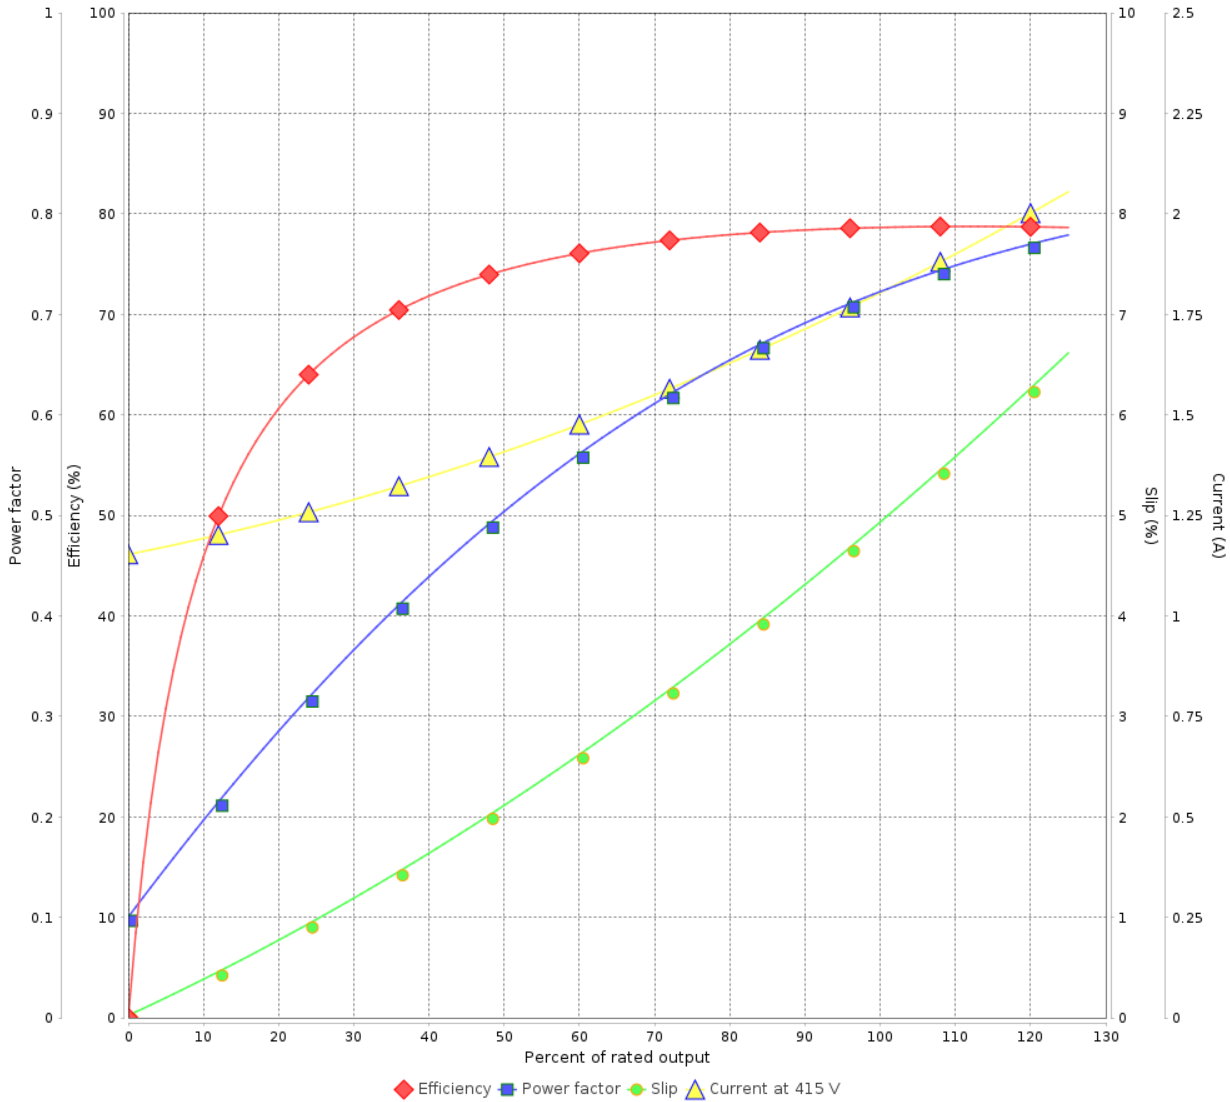

Performance : 415 V 50 Hz 6P IE2

Rated current : 1.85 A
LRC : 5.5
Rated torque : 0.764 kgfm
Locked rotor torque : 240 %
Breakdown torque : 250 %
Rated speed : 950 rpm

Moment of inertia (J) : 0.0067 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 6	Revision
Checked by				
Date	15/01/2024			