

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :					
Product line		: W21 Explosion Proof NEMA Premium Efficiency Three-Phase		Product code : 14965784	
Frame	: 444/5T	Locked rotor time	: 73s (cold) 41s (hot)		
Output	: 125 HP	Temperature rise	: 80 K		
Poles	: 6	Duty cycle	: Cont.(S1)		
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C		
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.		
Rated current	: 120 A	Protection degree	: IP55		
L. R. Amperes	: 888 A	Cooling method	: IC411 - TEFC		
LRC	: 7.4x(Code H)	Mounting	: F-1		
No load current	: 52.0 A	Rotation ¹	: Both (CW and CCW)		
Rated speed	: 1185 rpm	Noise level ²	: 70.0 dB(A)		
Slip	: 1.25 %	Starting method	: Direct On Line		
Rated torque	: 76.6 kgfm	Approx. weight ³	: 1030 kg		
Locked rotor torque	: 229 %				
Breakdown torque	: 240 %				
Insulation class	: F				
Service factor	: 1.15				
Moment of inertia (J)	: 4.37 kgm ²				
Design	: B				
Output	50%	75%	100%	Foundation loads	
Efficiency (%)	94.5	95.0	95.0	Max. traction : 1092 kgf	
Power Factor	0.67	0.76	0.82	Max. compression : 2122 kgf	
		<u>Drive end</u>	<u>Non drive end</u>		
Bearing type	:	6219 C3	6316 C3		
Sealing	:	Viton Oil Seal	Lip Seal		
Lubrication interval	:	12202 h	12823 h		
Lubricant amount	:	28 g	34 g		
Lubricant type	:	Mobil Polyrex EM			
Notes					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	19/10/2023			1 / 3	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	19/10/2023		2 / 3	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W21 Explosion Proof NEMA Premium
Efficiency Three-Phase

Product code : 14965784

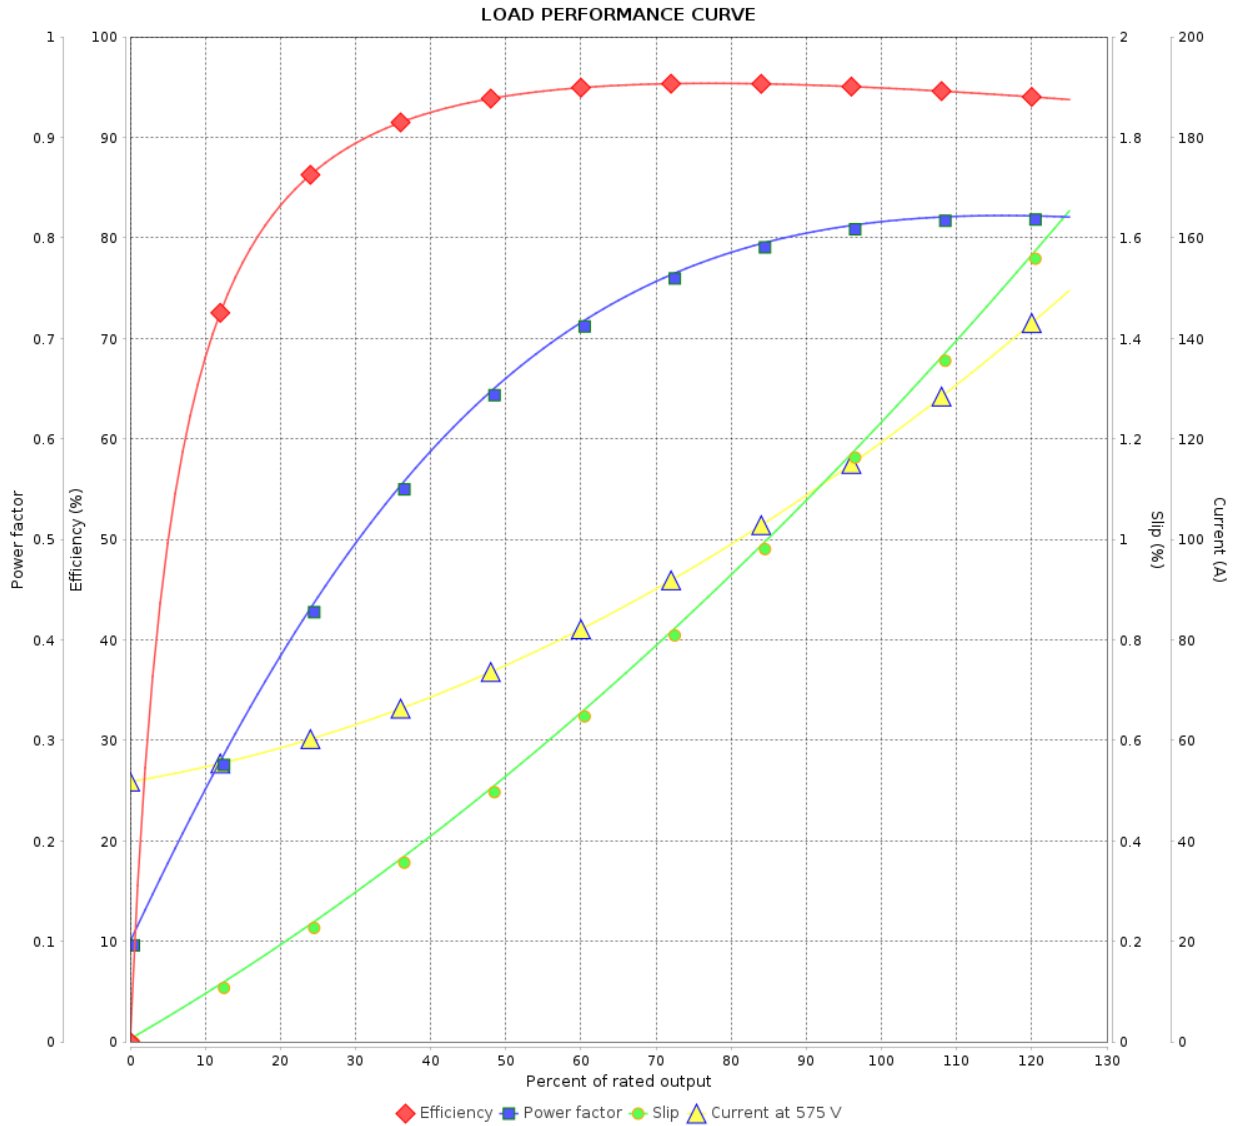

Performance : 575 V 60 Hz 6P

Rated current : 120 A
LRC : 7.4
Rated torque : 76.6 kgfm
Locked rotor torque : 229 %
Breakdown torque : 240 %
Rated speed : 1185 rpm

Moment of inertia (J) : 4.37 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 3		
Date		19/10/2023		