

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 P Base NEMA Premium Efficiency Three-Phase Product code : 15010603

Frame	: 182HP	Locked rotor time	: 28s (cold) 16s (hot)
Output	: 1.5 HP (1.1 kW)	Temperature rise	: 80 K
Poles	: 6	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 2.03 A	Protection degree	: IP55
L. R. Amperes	: 15.8 A	Cooling method	: IC411 - TEFC
LRC	: 7.8x(Code M)	Mounting	: W-6
No load current	: 1.30 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1170 rpm	Noise level ²	: 52.0 dB(A)
Slip	: 2.50 %	Starting method	: Direct On Line
Rated torque	: 0.930 kgfm	Approx. weight ³	: 44.6 kg
Locked rotor torque	: 320 %		
Breakdown torque	: 400 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0206 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads Max. traction Max. compression
Efficiency (%)	84.0	86.5	87.5	
Power Factor	0.45	0.54	0.62	

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
13.4	10.3	9.3	8.8	5.8	4.8	3.5

	<u>Drive end</u>	<u>Non drive end</u>
Bearing type	: 6308 ZZ	: 6206 ZZ
Sealing	: V'Ring	: V'Ring
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	: Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 2		
Date	15/01/2024			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 P Base NEMA Premium Efficiency
Three-Phase

Product code : 15010603

LOAD PERFORMANCE CURVE

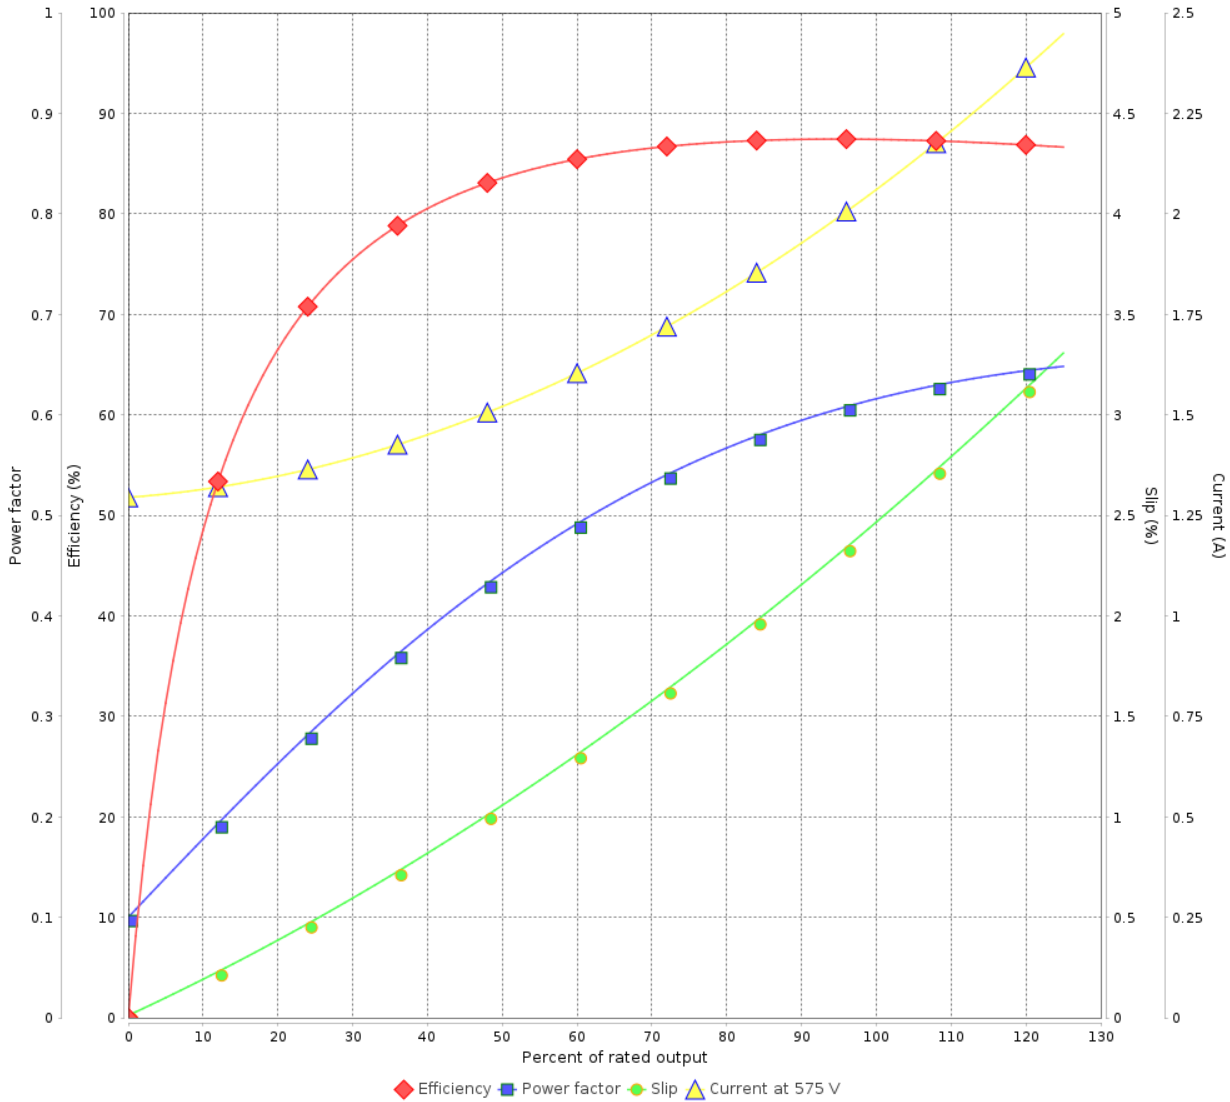

Performance : 575 V 60 Hz 6P

Rated current : 2.03 A
 LRC : 7.8
 Rated torque : 0.930 kgfm
 Locked rotor torque : 320 %
 Breakdown torque : 400 %
 Rated speed : 1170 rpm

Moment of inertia (J) : 0.0206 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	15/01/2024			