

# DATA SHEET



## Single Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 Single-Phase

Product code : 15268028

Frame	: 213/5TC	Locked rotor time	: 10s (cold) 6s (hot)
Output	: 7.5 HP (5.5 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 208-230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 32.0-30.0/15.0 A	Protection degree	: IP55
L. R. Amperes	: 246-231/116 A	Cooling method	: IC411 - TEFC
LRC	: 7.7x(Code H)	Mounting	: F-1
No load current	: 8.97-10.4/5.20 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 1750 rpm	Noise level <sup>2</sup>	: 63.0 dB(A)
Slip	: 2.78 %	Starting method	: Direct On Line
Rated torque	: 3.11 kgfm	Approx. weight <sup>3</sup>	: 82.5 kg
Locked rotor torque	: 320 %		
Breakdown torque	: 250 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0457 kgm <sup>2</sup>		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	75.6	81.0	83.0	Max. traction	: 102 kgf
Power Factor	0.91	0.94	0.96	Max. compression	: 185 kgf

	Drive end	Non drive end
Bearing type	: 6308 ZZ	: 6206 ZZ
Sealing	: V'Ring	: V'Ring
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	: Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	16/01/2024		1 / 2	

# LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 Single-Phase

Product code : 15268028

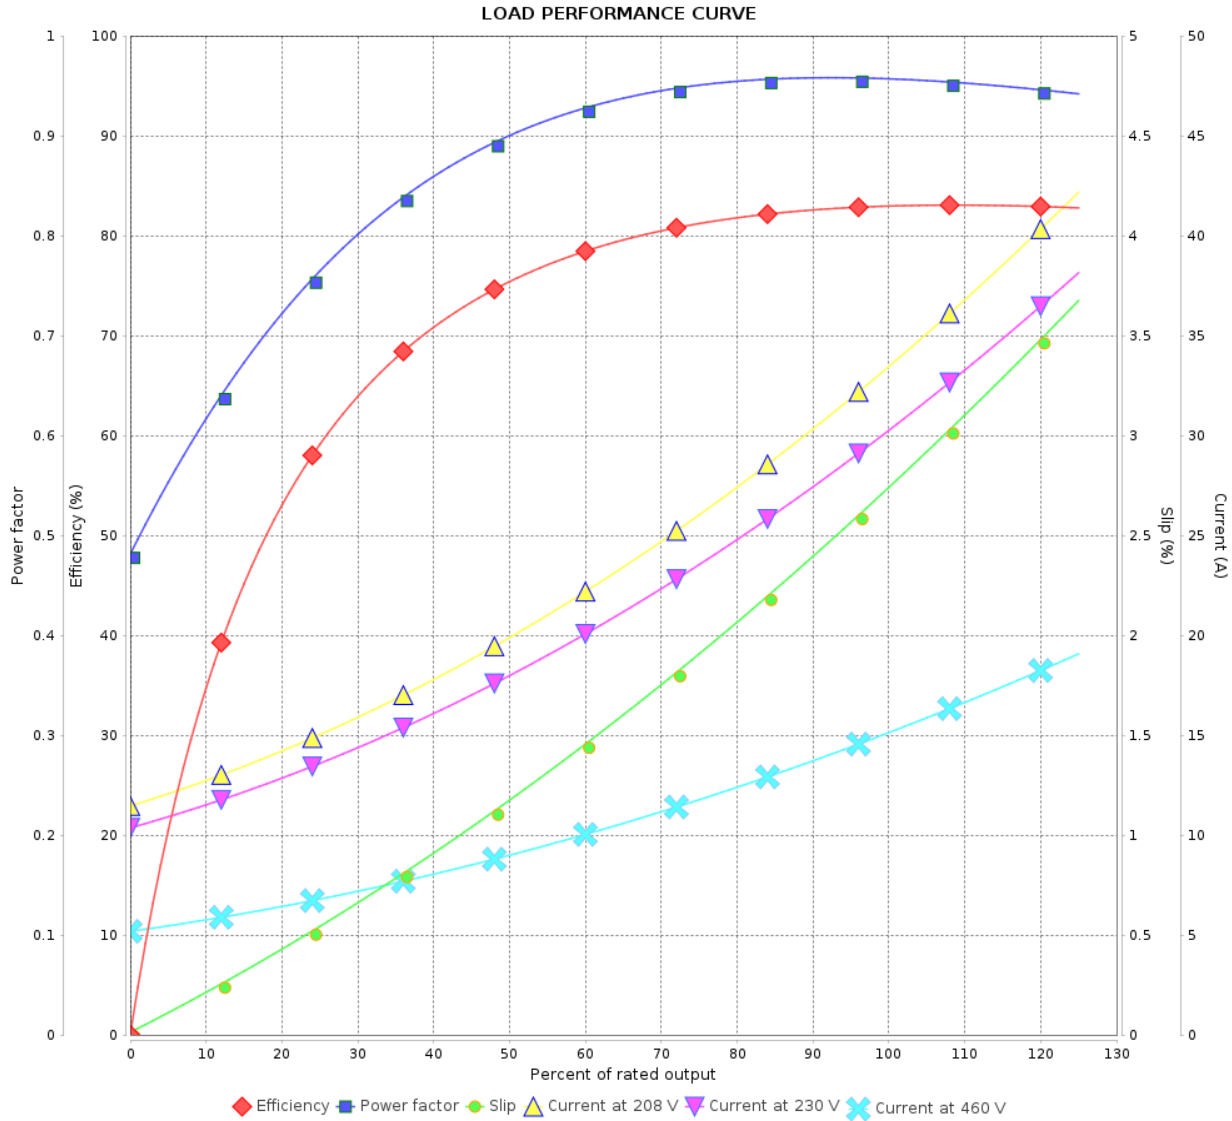

Performance : 208-230/460 V 60 Hz 4P

Rated current : 32.0-30.0/15.0 A  
 LRC : 7.7  
 Rated torque : 3.11 kgfm  
 Locked rotor torque : 320 %  
 Breakdown torque : 250 %  
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.0457 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor :  
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	16/01/2024			