

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 IE3 Three-Phase

Product code : 15399002

Frame	: L80	Locked rotor time	: 28s (cold) 16s (hot)
Output	: 1.5 kW (2 HP)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 208-230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 5.73-5.18/2.59 A	Protection degree	: IP55
L. R. Amperes	: 44.7-40.4/20.2 A	Cooling method	: IC411 - TEFC
LRC	: 7.8	Mounting	: B34R(E)
No load current	: 2.08-2.41/1.21 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 3425 rpm	Noise level ²	: 62.0 dB(A)
Slip	: 4.86 %	Starting method	: Direct On Line
Rated torque	: 0.427 kgfm	Approx. weight ³	: 16.0 kg
Locked rotor torque	: 375 %		
Breakdown torque	: 360 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0010 kgm ²		
Design	: N		

Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	84.0	85.0	85.5	Max. traction	: 41 kgf
Power Factor	0.00	0.68	0.79	0.85	Max. compression	: 57 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
16.1	13.3	12.5	8.5	5.4	3.7	2.4

	Drive end	Non drive end
Bearing type	: 6204 ZZ	6203 ZZ
Sealing	: V'Ring	V'Ring
Lubrication interval	: 0 h	0 h
Lubricant amount	: 0 g	0 g
Lubricant type	: Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in IEC 60034-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	16/01/2024		1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IE3 Three-Phase

Product code : 15399002

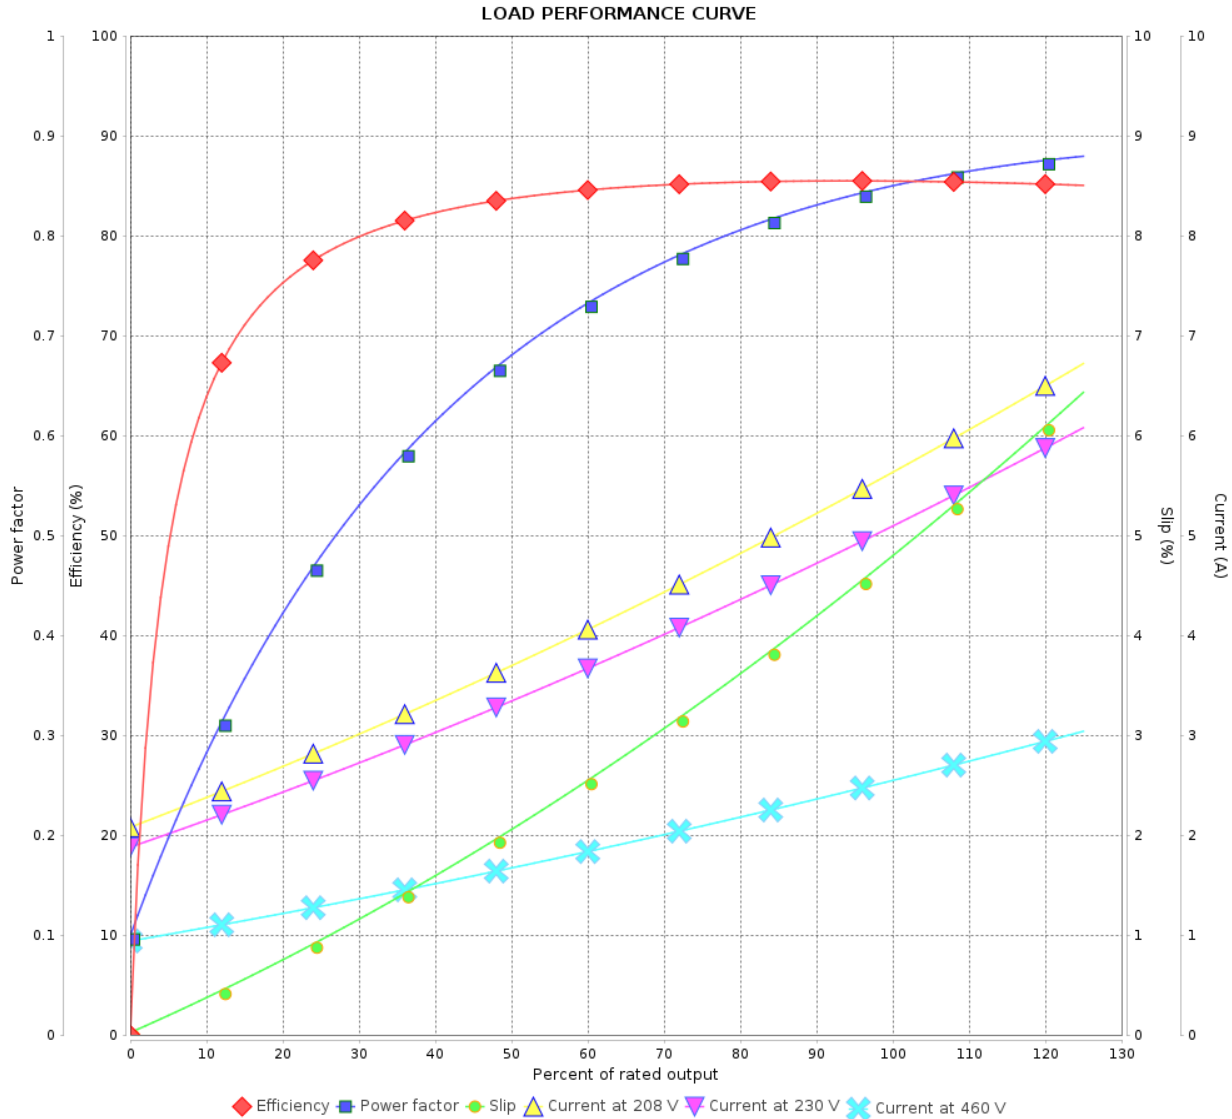

Performance : 208-230/460 V 60 Hz 2P

Rated current : 5.73-5.18/2.59 A
 LRC : 7.8
 Rated torque : 0.427 kgfm
 Locked rotor torque : 375 %
 Breakdown torque : 360 %
 Rated speed : 3425 rpm

Moment of inertia (J) : 0.0010 kgm²
 Duty cycle : S1
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	16/01/2024			