

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line : W22 Close Coupled Pump JP NEMA Premium Efficiency Three-Phase			Product code : 15533472			
Frame	: 213/5JP			Locked rotor time	: 36s (cold) 20s (hot)	
Output	: 7.5 HP (5.5 kW)			Temperature rise	: 80 K	
Poles	: 2			Duty cycle	: Cont.(S1)	
Frequency	: 60 Hz			Ambient temperature	: -20°C to +40°C	
Rated voltage	: 575 V			Altitude	: 1000 m.a.s.l.	
Rated current	: 7.01 A			Protection degree	: IP55	
L. R. Amperes	: 50.5 A			Cooling method	: IC411 - TEFC	
LRC	: 7.2x(Code H)			Mounting	: F-1	
No load current	: 2.40 A			Rotation ¹	: Both (CW and CCW)	
Rated speed	: 3530 rpm			Noise level ²	: 68.0 dB(A)	
Slip	: 1.94 %			Starting method	: Direct On Line	
Rated torque	: 1.54 kgfm			Approx. weight ³	: 70.5 kg	
Locked rotor torque	: 210 %					
Breakdown torque	: 300 %					
Insulation class	: F					
Service factor	: 1.25					
Moment of inertia (J)	: 0.0197 kgm ²					
Design	: B					
Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	87.2	87.5	89.5	89.5	Max. traction	: 50 kgf
Power Factor	0.50	0.75	0.84	0.88	Max. compression	: 120 kgf
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
11.3	9.1	8.4	5.9	3.6	2.4	1.5
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6309 Z C3		6207 ZZ		
Sealing	:	V'Ring		V'Ring		
Lubrication interval	:	19000 h		40000 h		
Lubricant amount	:	13 g		0 g		
Lubricant type	:	Mobil Polyrex EM				
Notes:						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	16/01/2024				1 / 2	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 Close Coupled Pump JP NEMA
Premium Efficiency Three-Phase

Product code : 15533472

LOAD PERFORMANCE CURVE

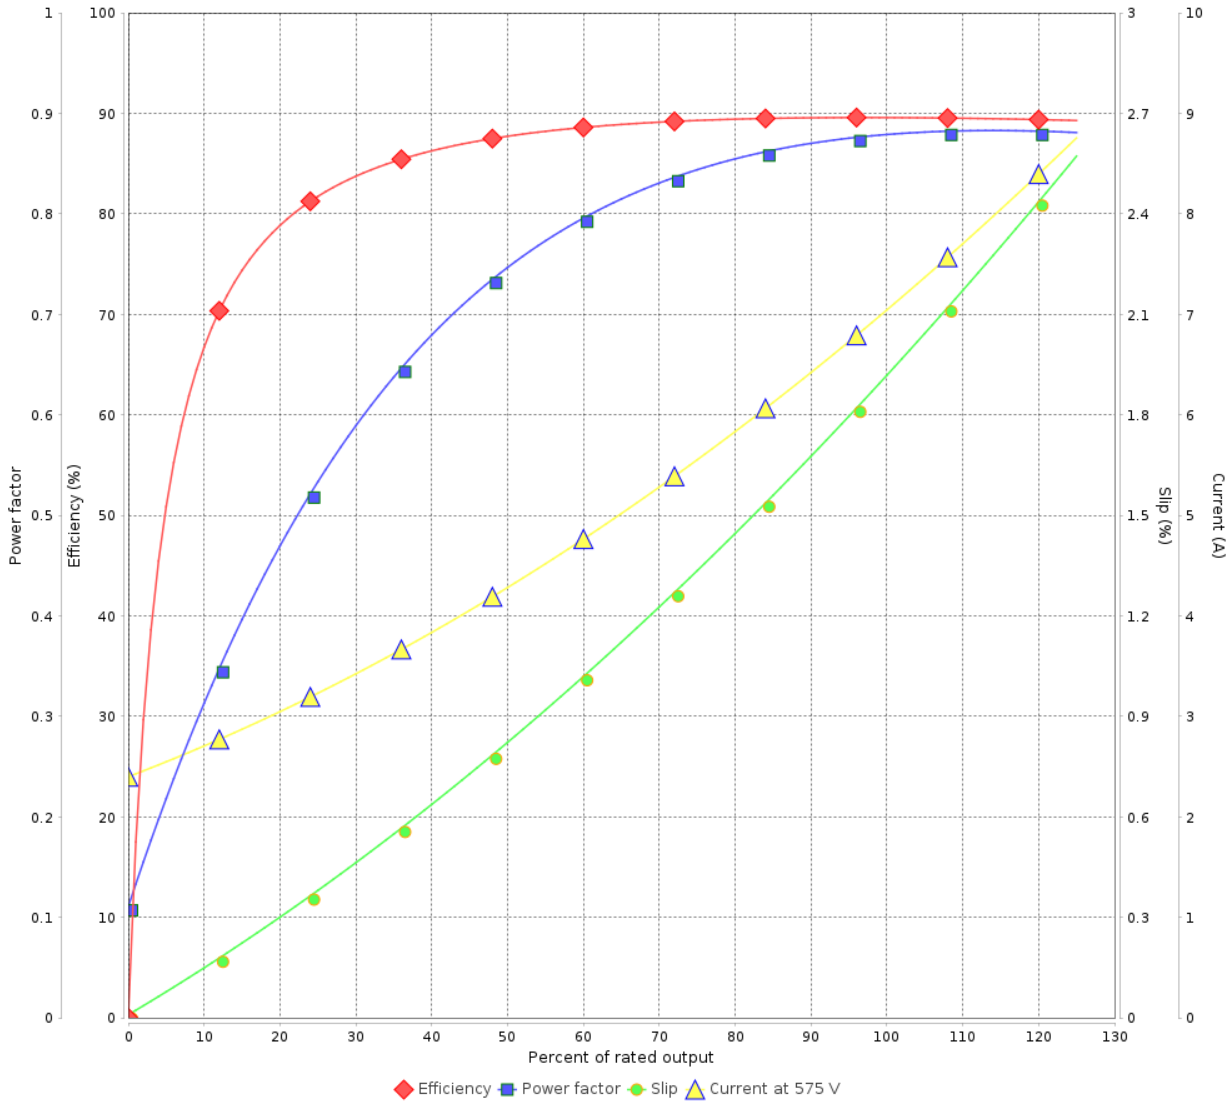

Performance : 575 V 60 Hz 2P

Rated current : 7.01 A
LRC : 7.2
Rated torque : 1.54 kgfm
Locked rotor torque : 210 %
Breakdown torque : 300 %
Rated speed : 3530 rpm

Moment of inertia (J) : 0.0197 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				